
Product data sheet




GF Uponor S-Press adapter swivel nut 50-G1 1/2"SN

1060095

- Made of tin-plated brass
- Demountable and resealable screw fitting for connection to valves and equipment
- Supplied with sealing gasket
- Fast installation with easy bevel and without need for calibration
- Inspection windows on press sleeve
- Colour code
- Thread acc. to BS EN ISO 228-1.

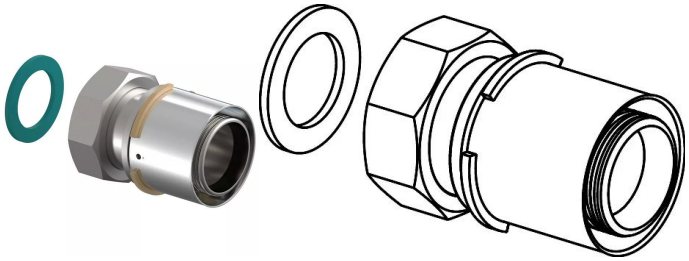



About GF Uponor S-Press adapter swivel nut

Specification

- Tin-plated brass or PPSU
- With fixed press sleeve
- Stop ring
- Colour code
- Test safety
- Male and female threads to BS EN 10226-1

Application

Tested/approved according to BS EN ISO 21003 Multilayer piping systems for hot and cold water installations inside buildings for application class 1,2,4,5/10bar

Domestic water services: The permanent operating temperature from 20°C to 70°C at a maximum permanent operating pressure of 10 bar. The short-term malfunction temperature is 95°C for a period of 100 hours in the operating life time.

Domestic cold water services : where the water temperature does not exceed 20°C at a maximum permanent operating pressure of 16bar.

Heating: The permanent operating temperature ranges up to 80°C at a maximum permanent operating pressure of 10 bar. The short-term malfunction temperature is 100°C for a period of 100 hours in the operating life time.


Certification


UK Reg4 approval
- WRAS or
- KIWA

To meet the requirements of the Water Supply (Water Fittings) Regulations 1999

GF Uponor S-Press adapter swivel nut 50-G1 1/2"SN

1060095

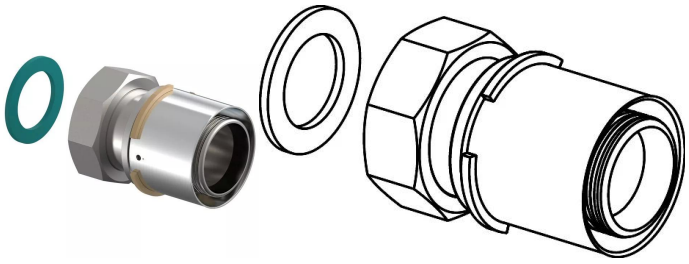



Measurements

Cylindric_thread_G	1 1/2
LENGTH_L	78,5
Length (l1)	9,5
Length (l2)	37,6
z1	31,4

Product code

Item no EAN	4021598122550
Item no GF	35001060095
Item no GTIN	04021598122550

Dimensions

Item Unit Height	63
Item Unit Length	55
Item Unit Weight	0,44
Item Unit Width	55
Item_UOM	pce

Packaging

Packaging GTIN PL1	06414905412501
Packaging GTIN PL4	06414905412525
Packaging Height PL1	89
Packaging Height PL4	411
Packaging Length PL1	176
Packaging Length PL4	1200
Packaging Quantity PL1	3
Packaging Quantity PL4	1152
Packaging Type PL1	Base_Box

Packaging Type PL4	Pallet
Packaging Volume PL1	0,001049488
Packaging Volume PL4	0,39456
Packaging Weight PL1	1,35
Packaging Weight PL4	536,949
Packaging Width PL1	67
Packaging Width PL4	800

Technical documents

Download documents here

Excellence in Flow

Visit our webpage to get in contact with your local specialist:
www.georgfischer.com/locations



Uponor UK

Blackmor Lane The Pavillion
WD18 8GA, Watford
UK

T +44 (0)1923 381212
E customerservice.uk.bfs@georgfischer.com

www.uponor.com/en-gb

+GF+