


## Uponor S-Press adapter swivel nut 50-G1 1/2"SN

### 1060095

- Made of tin-plated brass
- Fast installation with easy bevel and without calibration
- Colour code
- Releasable screw connector for connection to on-wall fittings, filters and shut-off valves
- Thread acc. to EN ISO 228-1.

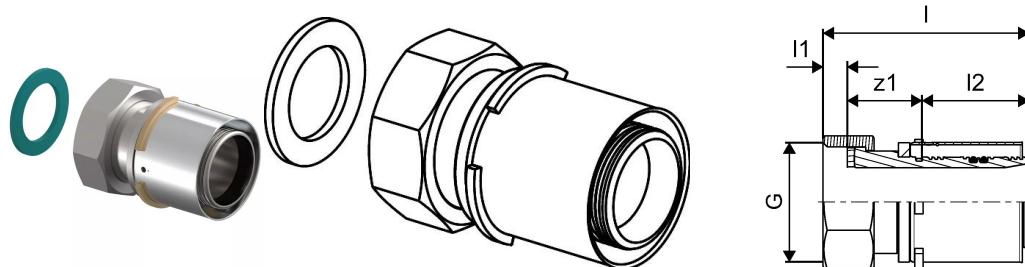

## About Uponor S-Press adapter swivel nut

### Specification

- with fixed press sleeve
- stop ring
- test safety

### Application

- Heating systems (high temperature radiators) - where the water temperature does not continuously exceed 80°C, 10 bar (Conditions to application Class 5 - BS EN ISO 21003-1:2008). The maximum short-term malfunction temperature is 100°C for an accumulative 100 hours over the working life of the system. (Heating systems must be installed with room and water temperature controls in accordance with the current Building Regulations Parts L1 (Energy – Dwellings) and L2 (Energy – Non Dwellings) for England and Wales, or an equivalent national standard for Scotland or Republic of Ireland)

- Cold water domestic services: 0°C to 20°C where the water temperature does not exceed 20°C, 16bar

- Hot water domestic services: 20°C to 70°C where the water temperature does not continuously exceed 70°C, 10 bar (Conditions to application Class 2 - BS EN ISO 21003-1:2008). The maximum short-term malfunction temperature is 95°C for an accumulative 100 hours over the working life of the system.

- Uponor multi-layer pipe can be used for DHW recirculating systems, provided the operating temperatures and pressures do not exceed the maximum conditions detailed under 'Domestic Services'

- Chilled water: -10°C to 10°C, 10 bar. If risk of damage from freezing, a suitable anti-freeze additive must be used. Any additive must be suitable for use with Polyethylene, PPSU, EPDM and CW625N brass

if not different mentioned:

- Male and female threads acc.to EN 10226-1.

### Certification

- WRAS : 2010907 - Uponor S-Press 12 & 14mm, MLC



- WRAS : 2109108 - S-Press & RS Modular 40-110mm, MLC

- KIWA – UK water Regulation 4

- Manufacturing is in accordance with the international quality standard ISO 9001 and environmental standard ISO 14001

## Uponor S-Press adapter swivel nut 50-G1 1/2"SN

1060095

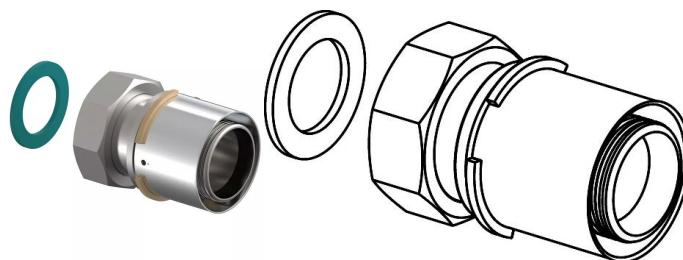

### Measurements

Cylindric_thread_G	1 1/2
Female thread Rp	1,5
LENGTH_L	78,5
Length (I1)	9,5
Length (I2)	37,6
z1	31,4

### Product code

Item no EAN	4021598122550
Item no GF	35001060095
Item no GTIN	04021598122550

### Dimensions

Item Unit Height	63
Item Unit Length	55
Item Unit Weight	0,44
Item Unit Width	55
Item_UOM	pce

### Packaging

Packaging GTIN PL1	06414905412501
Packaging GTIN PL4	06414905412525
Packaging Height PL1	89
Packaging Height PL4	411
Packaging Length PL1	176
Packaging Length PL4	1200
Packaging Quantity PL1	3
Packaging Quantity PL4	1152
Packaging Type PL1	Base_Box
Packaging Type PL4	Pallet

Packaging Volume PL1	0,001049488
Packaging Volume PL4	0,39456
Packaging Weight PL1	1,35
Packaging Weight PL4	536,949
Packaging Width PL1	67
Packaging Width PL4	800

## Technical documents

Download documents here 

### Uponor UK

Blackmor Lane The Pavilion  
WD18 8GA, Watford  
UK

T +44 (0)1923 927000  
E [enquiries.uk@uponor.com](mailto:enquiries.uk@uponor.com)

[www.uponor.com/en-gb](http://www.uponor.com/en-gb)