


Uponor Uni Pipe PLUS white S 16x2,0 3m

1060783

- Bar
- High dimensional stability, low expansion rate
- A stiffer construction than a coiled pipe
- 100% Oxygen barrier

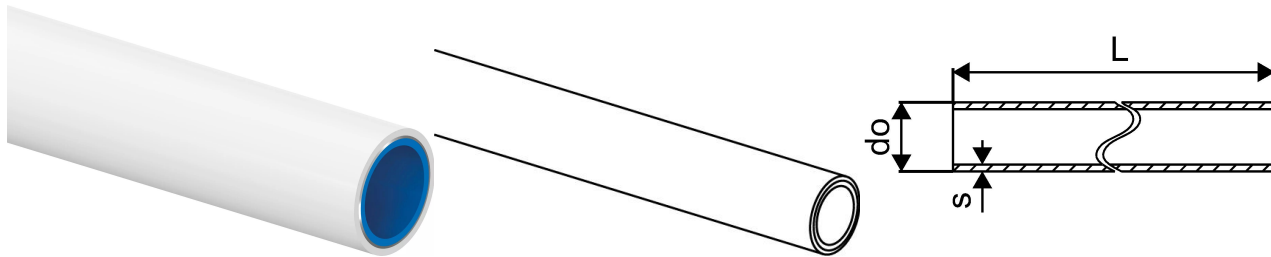

About Uponor Uni Pipe PLUS white S

Specification

Uponor Uni Pipe PLUS Seamless Aluminium Composite (SAC).

PE-RT/AL/PE-RT - 5 layer composite pipe consisting of an Aluminium pipe (100% oxygen-proof diffusion barrier, exceeding the requirements of DIN 4726), bonded to an inner layer of PE-RT (Polyethylene Raised Temperature), and outer layer of white PE-RT (Polyethylene Raised Temperature)

- Manufactured to BS EN ISO 21003-1 2008.
- Pipes are marked at 1m intervals with full production data in accordance with the requirements of the standard.
- Sizes 14-32 mm supplied as flexible coils
- Sizes 16-32 mm as extra rigid straight lengths.

Application

Tested/approved according to BS EN ISO 21003 Multilayer piping systems for hot and cold water installations inside buildings for application class 1,2,4,5/10bar

Domestic water services: The permanent operating temperature from 20°C to 70°C at a maximum permanent operating pressure of 10 bar. The short-term malfunction temperature is 95°C for a period of 100 hours in the operating life time.

Domestic cold water services : where the water temperature does not exceed 20°C at a maximum permanent operating pressure of 16bar.

Heating: The permanent operating temperature ranges up to 80°C at a maximum permanent operating pressure of 10 bar. The short-term malfunction temperature is 100°C for a period of 100 hours in the operating life time.

Certification


UK Reg4 approval

- WRAS or
- KIWA

To meet the requirements of the Water Supply (Water Fittings) Regulations 1999

Uponor Uni Pipe PLUS white S 16x2,0 3m

1060783

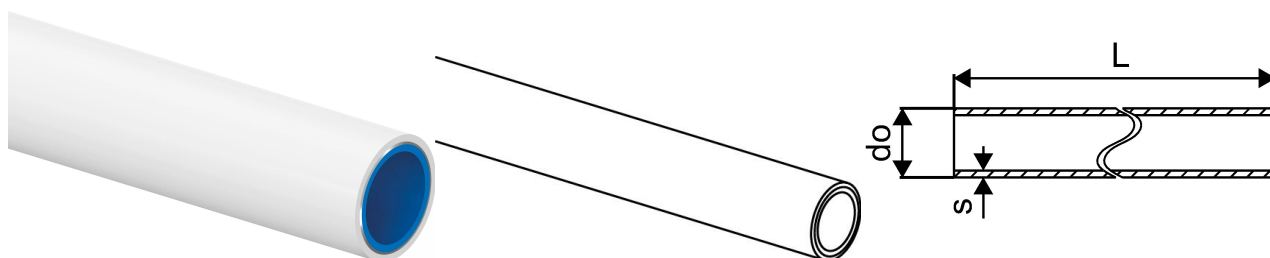

Product code

| | |
|--------------|----------------|
| Item no EAN | 4021598121898 |
| Item no GF | 35001060783 |
| Item no GTIN | 04021598121898 |
| Item no LVI | 1720145 |
| Item no NOBB | 53581685 |
| Item no NRF | 5071326 |
| Item no RSK | 2004937 |
| Item no VVS | 087480016 |

Dimensions

| | |
|------------------|-------|
| Item Unit Height | 16 |
| Item Unit Length | 1000 |
| Item Unit Weight | 0,124 |
| Item Unit Width | 16 |
| Item_UOM | m |

Measurements

| | |
|-------------------|----|
| Length | 3 |
| Outer Diameter_do | 16 |
| Wall thickness_s | 2 |

Packaging

| | |
|----------------------|----------------|
| Packaging GTIN PL1 | 06414905412594 |
| Packaging GTIN PL2 | 06414905412600 |
| Packaging GTIN PL4 | 06414905412617 |
| Packaging Height PL1 | 16 |
| Packaging Height PL2 | 110 |
| Packaging Height PL4 | 725 |
| Packaging Length PL1 | 3000 |
| Packaging Length PL2 | 3080 |

| | |
|------------------------|-------------|
| Packaging Length PL4 | 3080 |
| Packaging Quantity PL1 | 3 |
| Packaging Quantity PL2 | 75 |
| Packaging Quantity PL4 | 3825 |
| Packaging Type PL1 | Piece |
| Packaging Type PL2 | Cover_Pipe |
| Packaging Type PL4 | Wooden_Cage |
| Packaging Volume PL1 | 0,000768 |
| Packaging Volume PL2 | 0,037268 |
| Packaging Volume PL4 | 2,56795 |
| Packaging Weight PL1 | 0,372 |
| Packaging Weight PL2 | 10,285 |
| Packaging Weight PL4 | 603,968 |
| Packaging Width PL1 | 16 |
| Packaging Width PL2 | 110 |
| Packaging Width PL4 | 1150 |

Technical documents

Download documents here

Uponor UK

Blackmor Lane The Pavilion
 WD18 8GA, Watford
 UK

T +44 (0)1923 927000
 E enquiries.uk@uponor.com

www.uponor.com/en-gb