


## Uponor Uni Pipe PLUS white S 20x2,25 3m

1060784

- Bar
- High dimensional stability, low expansion rate
- A stiffer construction than a coiled pipe
- 100% Oxygen barrier

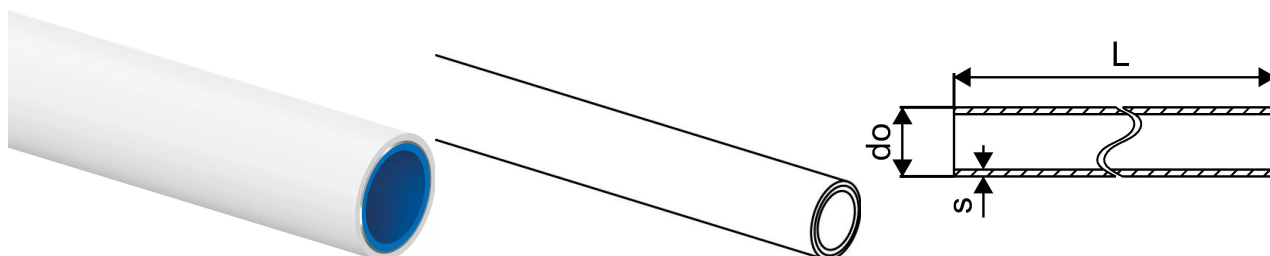

## About Uponor Uni Pipe PLUS white S

### Specification

Uponor Uni Pipe PLUS Seamless Aluminium Composite (SAC).

PE-RT/AL/PE-RT - 5 layer composite pipe consisting of an Aluminium pipe (100% oxygen-proof diffusion barrier, exceeding the requirements of DIN 4726), bonded to an inner layer of PE-RT (Polyethylene Raised Temperature), and outer layer of white PE-RT (Polyethylene Raised Temperature)

- Manufactured to BS EN ISO 21003-1 2008.
- Pipes are marked at 1m intervals with full production data in accordance with the requirements of the standard.
- Sizes 14-32 mm supplied as flexible coils
- Sizes 16-32 mm as extra rigid straight lengths.

### Application

Tested/approved according to BS EN ISO 21003 Multilayer piping systems for hot and cold water installations inside buildings for application class 1,2,4,5/10bar

Domestic water services: The permanent operating temperature from 20°C to 70°C at a maximum permanent operating pressure of 10 bar. The short-term malfunction temperature is 95°C for a period of 100 hours in the operating life time.

Domestic cold water services : where the water temperature does not exceed 20°C at a maximum permanent operating pressure of 16bar.

Heating: The permanent operating temperature ranges up to 80°C at a maximum permanent operating pressure of 10 bar. The short-term malfunction temperature is 100°C for a period of 100 hours in the operating life time.

### Certification


UK Reg4 approval

- WRAS or
- KIWA

To meet the requirements of the Water Supply (Water Fittings) Regulations 1999

## Uponor Uni Pipe PLUS white S 20x2,25 3m

1060784

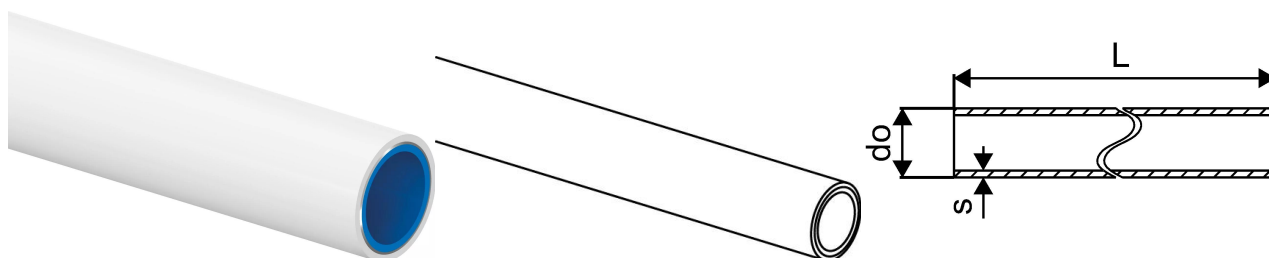

### Product code

|              |                |
|--------------|----------------|
| Item no EAN  | 4021598121904  |
| Item no GF   | 35001060784    |
| Item no GTIN | 04021598121904 |
| Item no LVI  | 1720146        |
| Item no NOBB | 53581693       |
| Item no NRF  | 5071327        |
| Item no RSK  | 2004938        |
| Item no VVS  | 087480020      |

### Dimensions

|                  |       |
|------------------|-------|
| Item Unit Height | 20    |
| Item Unit Length | 1000  |
| Item Unit Weight | 0,181 |
| Item Unit Width  | 20    |
| Item_UOM         | m     |

### Measurements

|                   |      |
|-------------------|------|
| Length            | 3    |
| Outer Diameter_do | 20   |
| Wall thickness_s  | 2,25 |

### Packaging

|                      |                |
|----------------------|----------------|
| Packaging GTIN PL1   | 06414905412624 |
| Packaging GTIN PL2   | 06414905412631 |
| Packaging GTIN PL4   | 06414905412648 |
| Packaging Height PL1 | 20             |
| Packaging Height PL2 | 110            |
| Packaging Height PL4 | 725            |
| Packaging Length PL1 | 3000           |
| Packaging Length PL2 | 3080           |

|                        |             |
|------------------------|-------------|
| Packaging Length PL4   | 3080        |
| Packaging Quantity PL1 | 3           |
| Packaging Quantity PL2 | 51          |
| Packaging Quantity PL4 | 2601        |
| Packaging Type PL1     | Piece       |
| Packaging Type PL2     | Cover_Pipe  |
| Packaging Type PL4     | Wooden_Cage |
| Packaging Volume PL1   | 0,0012      |
| Packaging Volume PL2   | 0,037268    |
| Packaging Volume PL4   | 2,56795     |
| Packaging Weight PL1   | 0,543       |
| Packaging Weight PL2   | 10,23       |
| Packaging Weight PL4   | 600,831     |
| Packaging Width PL1    | 20          |
| Packaging Width PL2    | 110         |
| Packaging Width PL4    | 1150        |

## Technical documents

Download documents here

### Uponor UK

Blackmor Lane The Pavilion  
 WD18 8GA, Watford  
 UK

T +44 (0)1923 927000  
 E enquiries.uk@uponor.com

[www.uponor.com/en-gb](http://www.uponor.com/en-gb)