


## Uponor Uni Pipe PLUS white S 25x2,5 3m

1060785

- Bar
- High dimensional stability, low expansion rate
- A stiffer construction than a coiled pipe
- 100% Oxygen barrier

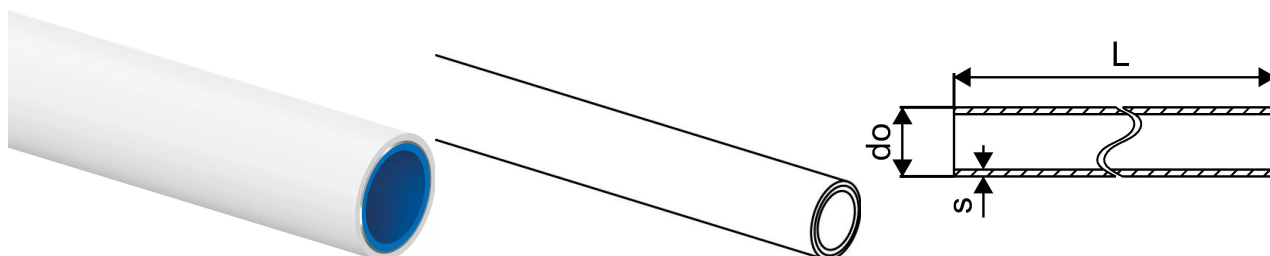

## About Uponor Uni Pipe PLUS white S

### Specification

Uponor Uni Pipe PLUS Seamless Aluminium Composite (SAC).

PE-RT/AL/PE-RT - 5 layer composite pipe consisting of an Aluminium pipe (100% oxygen-proof diffusion barrier, exceeding the requirements of DIN 4726), bonded to an inner layer of PE-RT (Polyethylene Raised Temperature), and outer layer of white PE-RT (Polyethylene Raised Temperature)

- Manufactured to BS EN ISO 21003-1 2008.
- Pipes are marked at 1m intervals with full production data in accordance with the requirements of the standard.
- Sizes 14-32 mm supplied as flexible coils
- Sizes 16-32 mm as extra rigid straight lengths.

### Application

Tested/approved according to BS EN ISO 21003 Multilayer piping systems for hot and cold water installations inside buildings for application class 1,2,4,5/10bar

Domestic water services: The permanent operating temperature from 20°C to 70°C at a maximum permanent operating pressure of 10 bar. The short-term malfunction temperature is 95°C for a period of 100 hours in the operating life time.

Domestic cold water services : where the water temperature does not exceed 20°C at a maximum permanent operating pressure of 16bar.

Heating: The permanent operating temperature ranges up to 80°C at a maximum permanent operating pressure of 10 bar. The short-term malfunction temperature is 100°C for a period of 100 hours in the operating life time.

### Certification


UK Reg4 approval

- WRAS or
- KIWA

To meet the requirements of the Water Supply (Water Fittings) Regulations 1999

## Uponor Uni Pipe PLUS white S 25x2,5 3m

1060785

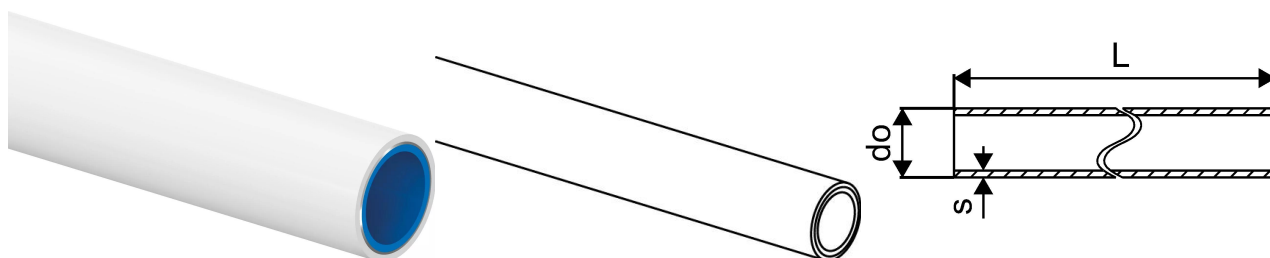

### Product code

Item no EAN	4021598121911
Item no GF	35001060785
Item no GTIN	04021598121911
Item no LVI	1720147
Item no NOBB	53581712
Item no NRF	5071328
Item no RSK	2004939
Item no VVS	087480025

### Dimensions

Item Unit Height	25
Item Unit Length	1000
Item Unit Weight	0,264
Item Unit Width	25
Item_UOM	m

### Measurements

Length	3
Outer Diameter_do	25
Wall thickness_s	2,5

### Packaging

Packaging GTIN PL1	06414905412655
Packaging GTIN PL2	06414905635351
Packaging GTIN PL4	06414905635566
Packaging Height PL1	25
Packaging Height PL2	110
Packaging Height PL4	725
Packaging Length PL1	3000
Packaging Length PL2	3080

Packaging Length PL4	3080
Packaging Quantity PL1	3
Packaging Quantity PL2	30
Packaging Quantity PL4	1530
Packaging Type PL1	Piece
Packaging Type PL2	Cover_Pipe
Packaging Type PL4	Wooden_Cage
Packaging Volume PL1	0,001875
Packaging Volume PL2	0,037268
Packaging Volume PL4	2,56795
Packaging Weight PL1	0,792
Packaging Weight PL2	12,40
Packaging Weight PL4	632
Packaging Width PL1	25
Packaging Width PL2	110
Packaging Width PL4	1150

## Technical documents

Download documents here 

### Uponor UK

Blackmor Lane The Pavilion  
 WD18 8GA, Watford  
 UK

T +44 (0)1923 927000  
 E enquiries.uk@uponor.com

[www.uponor.com/en-gb](http://www.uponor.com/en-gb)