
Product data sheet



GF Uponor Uni Pipe PLUS white S 32x3,0 3m

1060786

- Bar
- High dimensional stability, low expansion rate
- A stiffer construction than a coiled pipe
- 100% Oxygen barrier

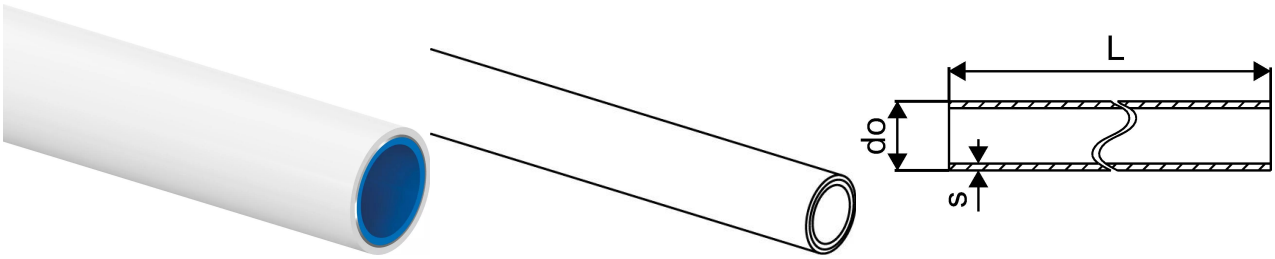

About GF Uponor Uni Pipe PLUS white S

Specification

Uponor Uni Pipe PLUS Seamless Aluminium Composite (SAC).

PE-RT/AL/PE-RT - 5 layer composite pipe consisting of an Aluminium pipe (100% oxygen-proof diffusion barrier, exceeding the requirements of DIN 4726), bonded to an inner layer of PE-RT (Polyethylene Raised Temperature), and outer layer of white PE-RT (Polyethylene Raised Temperature)
- Manufactured to BS EN ISO 21003-1 2008.
- Pipes are marked at 1m intervals with full production data in accordance with the requirements of the standard.
- Sizes 14-32 mm supplied as flexible coils
- Sizes 16-32 mm as extra rigid straight lengths.

Application

Tested/approved according to BS EN ISO 21003 Multilayer piping systems for hot and cold water installations inside buildings for application class 1,2,4,5/10bar

Domestic water services: The permanent operating temperature from 20°C to 70°C at a maximum permanent operating pressure of 10 bar. The short-term malfunction temperature is 95°C for a period of 100 hours in the operating life time.

Domestic cold water services : where the water temperature does not exceed 20°C at a maximum permanent operating pressure of 16bar.


Heating: The permanent operating temperature ranges up to 80°C at a maximum permanent operating pressure of 10 bar. The short-term malfunction temperature is 100°C for a period of 100 hours in the operating life time.

Certification

UK Reg4 approval
- WRAS or
- KIWA
To meet the requirements of the
Water Supply (Water Fittings) Regulations 1999

GF Uponor Uni Pipe PLUS white S 32x3,0 3m

1060786

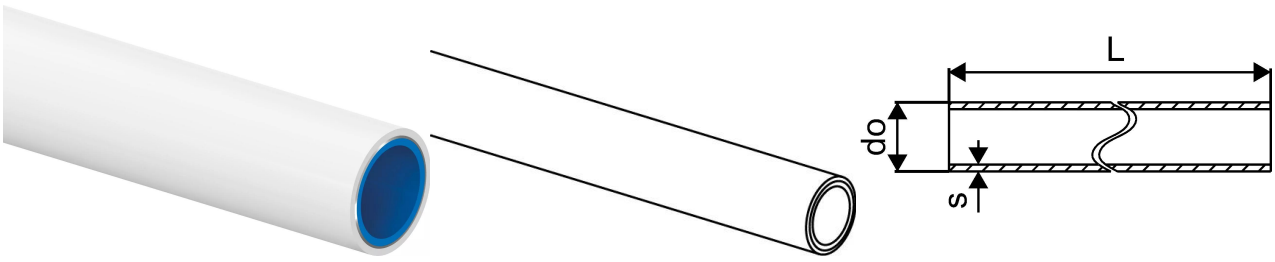

Product code

Item no EAN	4021598121928
Item no GF	35001060786
Item no GTIN	04021598121928
Item no LVI	1720148
Item no NOBB	53581738
Item no NRF	5071329
Item no RSK	2004940
Item no VVS	087480032

Dimensions

Item Unit Height	32
Item Unit Length	1000
Item Unit Weight	0,413
Item Unit Width	32
Item_UOM	m

Measurements

Length	3
Outer Diameter_do	32
Wall thickness_s	3

Packaging

Packaging GTIN PL1	06414905412686
Packaging GTIN PL2	06414905412693
Packaging GTIN PL4	06414905412709
Packaging Height PL1	32
Packaging Height PL2	110
Packaging Height PL4	725

Packaging Length PL1	3000
Packaging Length PL2	3080
Packaging Length PL4	3080
Packaging Quantity PL1	3
Packaging Quantity PL2	21
Packaging Quantity PL4	1071
Packaging Type PL1	Piece
Packaging Type PL2	Cover_Pipe
Packaging Type PL4	Wooden_Cage
Packaging Volume PL1	0,003072
Packaging Volume PL2	0,037268
Packaging Volume PL4	2,56795
Packaging Weight PL1	1,24
Packaging Weight PL2	9,678
Packaging Weight PL4	572,664
Packaging Width PL1	32
Packaging Width PL2	110
Packaging Width PL4	1150

Technical documents

Download documents here

Excellence in Flow

Visit our webpage to get in contact with your local specialist:
www.georgfischer.com/locations



Uponor UK

Blackmor Lane The Pavillion
WD18 8GA, Watford
UK

T +44 (0)1923 381212
E customerservice.uk.bfs@georgfischer.com

www.uponor.com/en-gb

+GF+