


Uponor Comfort Pipe PLUS 16x2,0 120m

1062044

- UFH pipe made of PEX-a
- Complying with ISO 22391 and fulfils oxygen diffusion resistance as per DIN 4726
- Application class 4 and 5
- Design pressure 6 Bar at 70°C

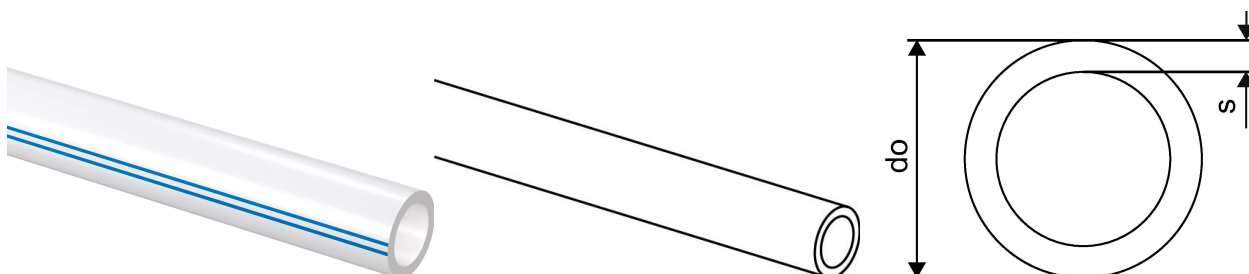

About Uponor Comfort Pipe PLUS

Specification


- Pipes manufactured from peroxide cross-linked polyethylene (PE-Xa) acc. EN ISO 15875
- EVOH (ethylene vinyl alcohol) layer for oxygen diffusion resistance as per DIN 4726
- 5layer
- Outside white PE layer designed to protect against mechanical damages
- Application class 4/5 - Underfloor heating and low temperature radiators
- Fire classification E according to DIN EN 13501-1.

Application

- Underfloor heating and low temperature radiators
- Heating
- Max design temperature: 90°C
- Malfunction temperature 100°C
- Design pressure 6 Bar at 70°C

Uponor Comfort Pipe PLUS 16x2,0 120m

1062044

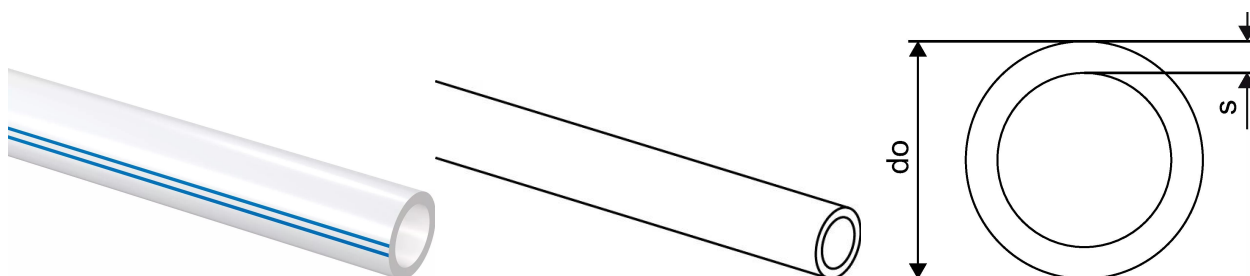

Technical data

Item no EAN	7321500056148
Item no GTIN	07321500056148
Item no VVS	087217164
Item no LVI	2022243
Item (unit of measurement)	m
Packaging Quantity 1	120
Packaging Quantity 4	1080
Packaging GTIN PL1	06414905412808
Packaging GTIN PL4	06414905412815
Item Unit Height	15 mm
Item Unit Weight	0,091 kg
Item Unit Width	15 mm

Technical documents

Download documents here

Uponor UK

Blackmor Lane The Pavilion
WD18 8GA, Watford
UK

T +44 (0)1923 927000
E enquiries.uk@uponor.com

www.uponor.com/en-gb