


## Uponor Comfort Pipe PLUS 16x2,0 240m

### 1062045

- UFH pipe made of PE-Xa
- Complying with ISO 22391 and fulfils oxygen diffusion resistance as per DIN 4726
- Application class 4 and 5
- Design pressure 6 Bar at 70°C

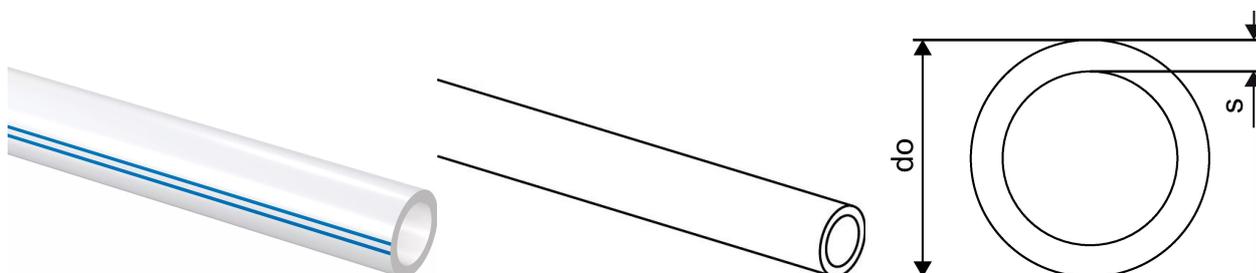

## About Uponor Comfort Pipe PLUS

### Specification


- Pipes manufactured from peroxide cross-linked polyethylene (PE-Xa) acc. BS EN ISO 15875
- EVOH (ethylene vinyl alcohol) layer for oxygen diffusion resistance as per DIN 4726
- 5layer
- Outside white PE layer designed to protect against mechanical damages
- Application class 4/5 - Underfloor heating and low temperature radiators
- Fire class E according to BS EN 13501-1.

### Application

- Underfloor heating and low temperature radiators
- Heating
- Max design temperature: 80°C
- Malfunction temperature 100°C
- Design pressure 6 Bar at 70°C

## Uponor Comfort Pipe PLUS 16x2,0 240m

1062045

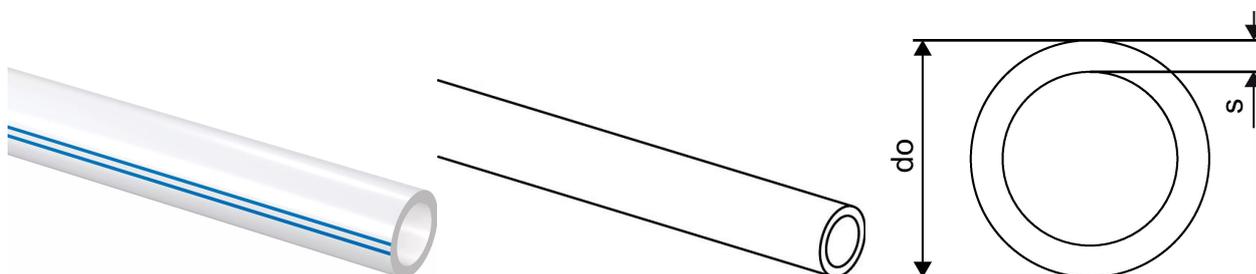

### Product code

Item no EAN	7321500056155
Item no GF	35001062045
Item no GTIN	07321500056155
Item no LVI	2022244
Item no NRF	8361262
Item no RSK	2523237
Item no VVS	087217165

### Dimensions

Item Unit Height	15
Item Unit Length	1000
Item Unit Weight	0,091
Item Unit Width	15
Item_UOM	m

### Measurements

Outer Diameter_do	16
Wall thickness_s	2

### Packaging

Packaging GTIN PL1	06414905412822
Packaging GTIN PL4	06414905412839
Packaging Height PL1	200
Packaging Height PL4	800
Packaging Length PL1	800
Packaging Length PL4	1200
Packaging Quantity PL1	240
Packaging Quantity PL4	1440
Packaging Type PL1	Base_Box
Packaging Type PL4	Pallet

Packaging Volume PL1	0,1256
Packaging Volume PL4	0,768
Packaging Weight PL1	22,11
Packaging Weight PL4	132,66
Packaging Width PL1	785
Packaging Width PL4	800

## Technical documents

Download documents here 

### Uponor UK

Blackmor Lane The Pavilion  
WD18 8GA, Watford  
UK

T +44 (0)1923 927000  
E [enquiries.uk@uponor.com](mailto:enquiries.uk@uponor.com)

[www.uponor.com/en-gb](http://www.uponor.com/en-gb)