


## Uponor Comfort Pipe PLUS 16x2,0 640m

1062046

- UFH pipe made of PEX-a
- Complying with ISO 22391 and fulfils oxygen diffusion resistance as per DIN 4726
- Application class 4 and 5
- Design pressure 6 Bar at 70°C

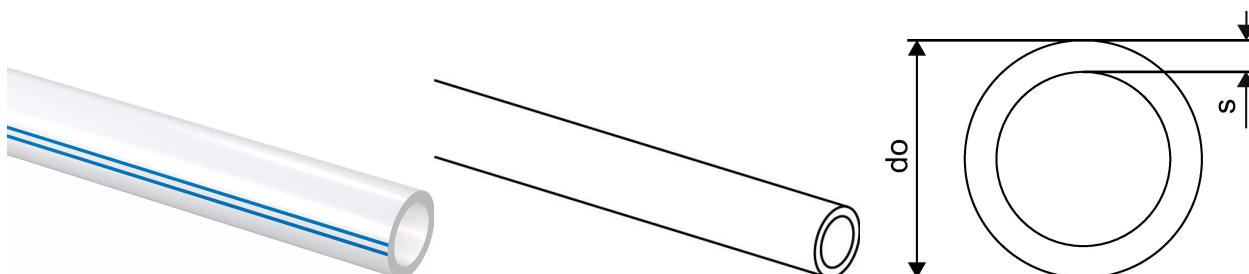

### About Uponor Comfort Pipe PLUS

#### Specification


- Pipes manufactured from peroxide cross-linked polyethylene (PE-Xa) acc. EN ISO 15875
- EVOH (ethylene vinyl alcohol) layer for oxygen diffusion resistance as per DIN 4726
- 5layer
- Outside white PE layer designed to protect against mechanical damages
- Application class 4/5 - Underfloor heating and low temperature radiators
- Fire classification E according to DIN EN 13501-1.

#### Application

- Underfloor heating and low temperature radiators
- Heating
- Max design temperature: 90°C
- Malfunction temperature 100°C
- Design pressure 6 Bar at 70°C

## Uponor Comfort Pipe PLUS 16x2,0 640m

1062046

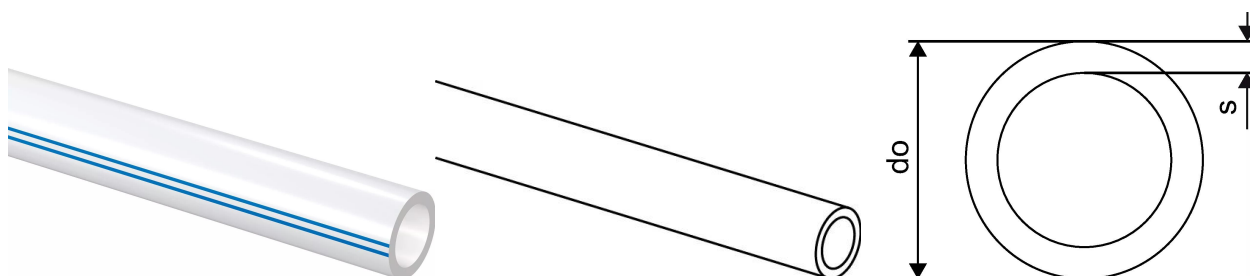

### Technical data

Item no EAN	7321500056162
Item no GTIN	07321500056162
Item no VVS	087217167
Item no NRF	8361263
Item no LVI	2022245
Item (unit of measurement)	m
Packaging Quantity 1	640
Packaging Quantity 4	1280
Packaging GTIN PL1	06414905412846
Packaging GTIN PL4	06414905412853
Item Unit Height	16 mm
Item Unit Weight	0,091 kg
Item Unit Width	16 mm

### Technical documents

Download documents here

#### Uponor UK

Blackmor Lane The Pavilion  
WD18 8GA, Watford  
UK

T +44 (0)1923 927000  
E enquiries.uk@uponor.com

[www.uponor.com/en-gb](http://www.uponor.com/en-gb)