
Product data sheet



GF Uponor Uni Pipe PLUS white insulated S10 WLS 035 16x2,0 blue 75m

1062181

- Coil
- Insulation thickness 10 mm
- Thermal conductivity λ=0,035 W/m*k
- Round extruded
- Fire Class E to BS EN 13501-1

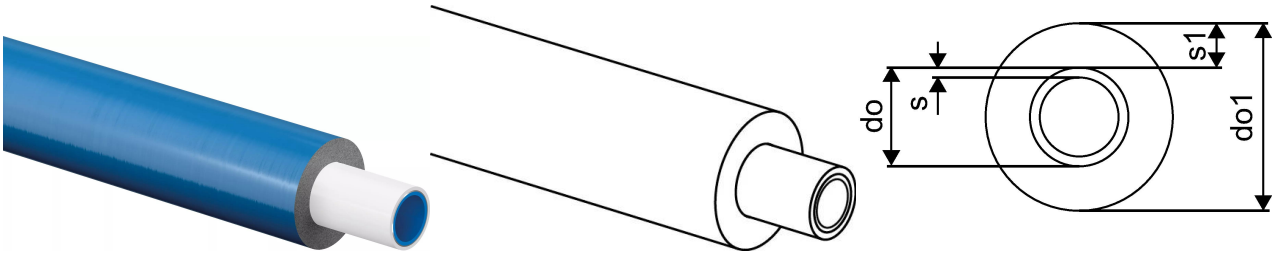

About GF Uponor Uni Pipe PLUS white insulated S10 WLS 035

Specification

Uponor Uni Pipe PLUS Seamless Aluminium Composite (SAC).

PE-RT/AL/PE-RT - 5 layer composite pipe consisting of an Aluminium pipe (100% oxygen-proof diffusion barrier, exceeding the requirements of DIN 4726), bonded to an inner layer of PE-RT (Polyethylene Raised Temperature), and outer layer of white PE-RT (Polyethylene Raised Temperature)
- Manufactured to BS EN ISO 21003-1 2008.
- Pipes are marked at 1m intervals with full production data in accordance with the requirements of the standard.
- Sizes 14-32 mm supplied as flexible coils
- Sizes 16-32 mm as extra rigid straight lengths.

Application

Tested/approved according to BS EN ISO 21003 Multilayer piping systems for hot and cold water installations inside buildings for application class 1,2,4,5/10bar

Domestic water services: The permanent operating temperature from 20°C to 70°C at a maximum permanent operating pressure of 10 bar. The short-term malfunction temperature is 95°C for a period of 100 hours in the operating life time.

Domestic cold water services : where the water temperature does not exceed 20°C at a maximum permanent operating pressure of 16bar.


Heating: The permanent operating temperature ranges up to 80°C at a maximum permanent operating pressure of 10 bar. The short-term malfunction temperature is 100°C for a period of 100 hours in the operating life time.

Certification

UK Reg4 approval
- WRAS or
- KIWA
To meet the requirements of the
Water Supply (Water Fittings) Regulations 1999

GF Uponor Uni Pipe PLUS white insulated S10 WLS 035 16x2,0 blue 75m

1062181

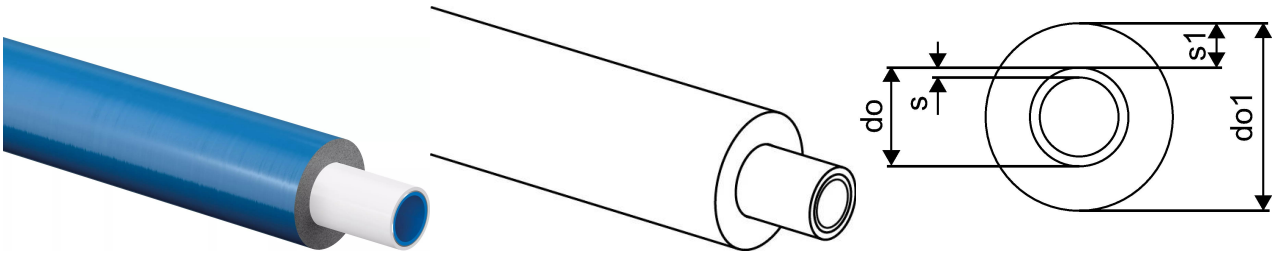

Product code

Item no EAN	4021598123526
Item no GF	35001062181
Item no GTIN	04021598123526
Item no LVI	1720149
Item no NRF	5071201
Item no RSK	2004929
Item no VVS	087481416

Dimensions

Item Unit Height	36
Item Unit Length	1000
Item Unit Weight	0,143
Item Unit Width	36
Item_UOM	m

Measurements

Outer Diameter_do	16
Outer Diameter_do1	36
Wall thickness_s	2
Wall thickness_s1	10

Packaging

Packaging GTIN PL1	06414905412860
Packaging GTIN PL4	06414905412877
Packaging Height PL1	787
Packaging Height PL4	1718
Packaging Length PL1	779
Packaging Length PL4	1200

Packaging Quantity PL1	75
Packaging Quantity PL4	450
Packaging Type PL1	Base_Box
Packaging Type PL4	Pallet
Packaging Volume PL1	0,238485397
Packaging Volume PL4	1,64928
Packaging Weight PL1	13,15
Packaging Weight PL4	103,9
Packaging Width PL1	389
Packaging Width PL4	800

Technical documents

Download documents here

Excellence in Flow

Visit our webpage to get in contact with your local specialist:
www.georgfischer.com/locations



Uponor UK

Blackmor Lane The Pavillion
WD18 8GA, Watford
UK

T +44 (0)1923 381212
E customerservice.uk.bfs@georgfischer.com

www.uponor.com/en-gb

+GF+