
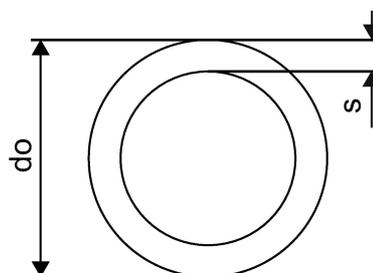


## Uponor Comfort Pipe PLUS 14x2,0 120m

**1062883**

- UFH pipe made of PE-Xa
- Complying with ISO 22391 and fulfils oxygen diffusion resistance as per DIN 4726
- Application class 4 and 5
- Design pressure 6 Bar at 70°C

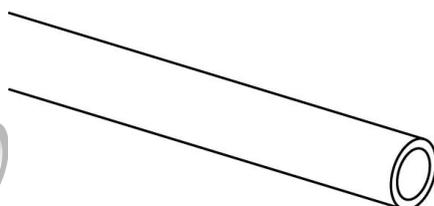

### About Uponor Comfort Pipe PLUS

#### Specification



- Pipes manufactured from peroxide cross-linked polyethylene (PE-Xa) acc. BS EN ISO 15875
- EVOH (ethylene vinyl alcohol) layer for oxygen diffusion resistance as per DIN 4726
- 5layer
- Outside white PE layer designed to protect against mechanical damages
- Application class 4/5 - Underfloor heating and low temperature radiators
- Fire class E according to BS EN 13501-1.

#### Application

- Underfloor heating and low temperature radiators
- Heating
- Max design temperature: 80°C
- Malfunction temperature 100°C
- Design pressure 6 Bar at 70°C

## Uponor Comfort Pipe PLUS 14x2,0 120m

1062883

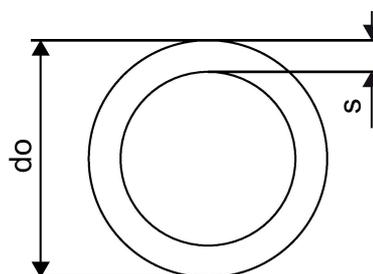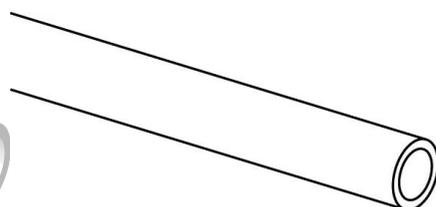

### Product code

Item no EAN	7321500056506
Item no GF	35001062883
Item no GTIN	07321500056506

### Dimensions

Item Unit Height	14
Item Unit Length	1000
Item Unit Weight	0,078
Item Unit Width	14
Item_UOM	m

### Measurements

Outer Diameter_do	14
Wall thickness_s	2

### Packaging

Packaging GTIN PL1	06414905413072
Packaging GTIN PL4	06414905413089
Packaging Height PL1	100
Packaging Height PL4	950
Packaging Length PL1	780
Packaging Length PL4	1200
Packaging Quantity PL1	120
Packaging Quantity PL4	1320
Packaging Type PL1	Base_Box
Packaging Type PL4	Pallet
Packaging Volume PL1	0,06084
Packaging Volume PL4	0,912
Packaging Weight PL1	9,575
Packaging Weight PL4	130,323

Packaging Width PL1	780
Packaging Width PL4	800

## Technical documents

Download documents here 

### Uponor UK

Blackmor Lane The Pavilion  
WD18 8GA, Watford  
UK

T +44 (0)1923 927000  
E [enquiries.uk@uponor.com](mailto:enquiries.uk@uponor.com)

[www.uponor.com/en-gb](http://www.uponor.com/en-gb)