


Uponor Comfort Pipe PLUS 14x2,0 240m

1062884

- UFH pipe made of PEX-a
- Complying with ISO 22391 and fulfils oxygen diffusion resistance as per DIN 4726
- Application class 4 and 5
- Design pressure 6 Bar at 70°C

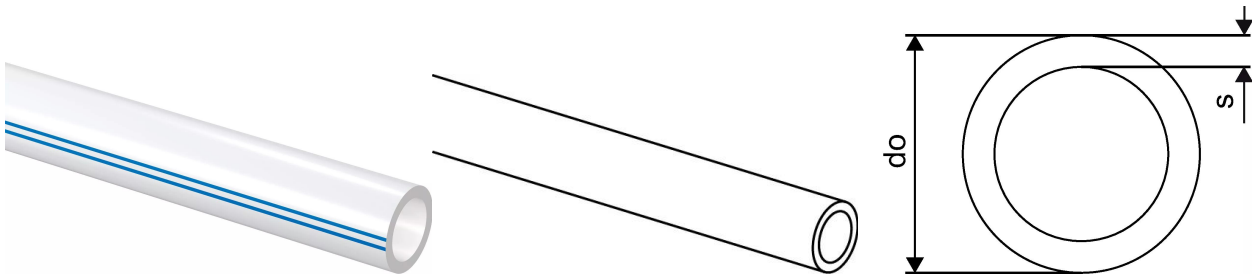

About Uponor Comfort Pipe PLUS

Specification


- Pipes manufactured from peroxide cross-linked polyethylene (PE-Xa) acc. EN ISO 15875
- EVOH (ethylene vinyl alcohol) layer for oxygen diffusion resistance as per DIN 4726
- 5layer
- Outside white PE layer designed to protect against mechanical damages
- Application class 4/5 - Underfloor heating and low temperature radiators
- Fire classification E according to DIN EN 13501-1.

Application

- Underfloor heating and low temperature radiators
- Heating
- Max design temperature: 90°C
- Malfunction temperature 100°C
- Design pressure 6 Bar at 70°C

Uponor Comfort Pipe PLUS 14x2,0 240m

1062884

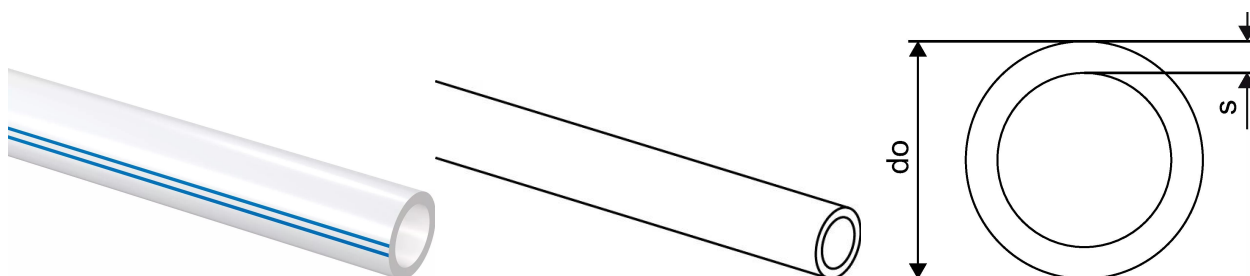

Technical data

Item no EAN	7321500056513
Item no GTIN	07321500056513
Item no NRF	8361282
Item (unit of measurement)	m
Packaging Quantity 1	240
Packaging Quantity 4	1680
Packaging GTIN PL1	06414905413096
Packaging GTIN PL4	06414905413102
Item Unit Height	14 mm
Item Unit Weight	0,079 kg
Item Unit Width	14 mm

Technical documents

[Download documents here](#)

Uponor UK

Blackmor Lane The Pavilion
WD18 8GA, Watford
UK

T +44 (0)1923 927000
E enquiries.uk@uponor.com

www.uponor.com/en-gb