


## Uponor Comfort Pipe PLUS 25x2,3 220m

**1062888**

- 6 bar at 80°C
- Application class 4 and 5

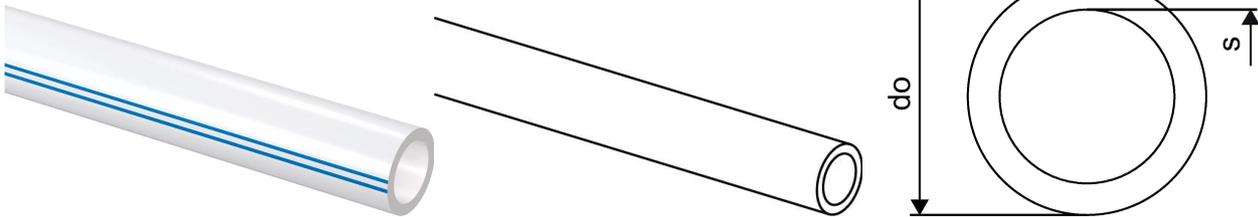

### About Uponor Comfort Pipe PLUS

#### Specification


- Pipes manufactured from peroxide cross-linked polyethylene (PE-Xa) acc. BS EN ISO 15875
- EVOH (ethylene vinyl alcohol) layer for oxygen diffusion resistance as per DIN 4726
- 5layer
- Outside white PE layer designed to protect against mechanical damages
- Application class 4/5 - Underfloor heating and low temperature radiators
- Fire class E according to BS EN 13501-1.

#### Application

- Underfloor heating and low temperature radiators
- Heating
- Max design temperature: 80°C
- Malfunction temperature 100°C
- Design pressure 6 Bar at 70°C

## Uponor Comfort Pipe PLUS 25x2,3 220m

1062888

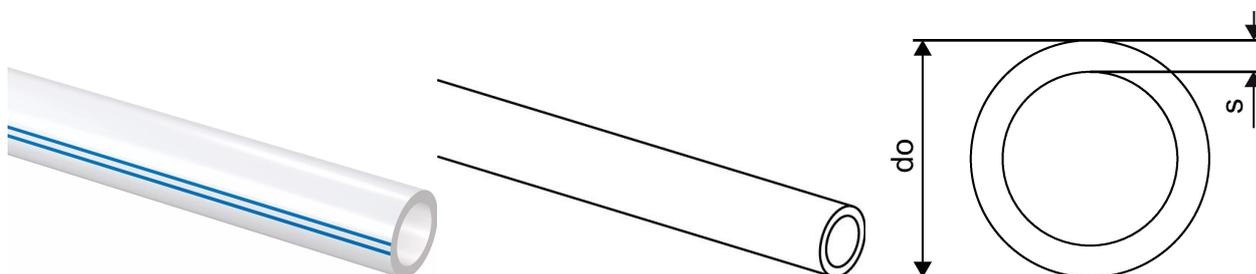

### Product code

Item no EAN	7321500056544
Item no GF	35001062888
Item no GTIN	07321500056544
Item no LVI	2022044
Item no VVS	087225124

### Dimensions

Item Unit Height	25
Item Unit Length	1000
Item Unit Weight	0,168
Item Unit Width	25
Item_UOM	m

### Measurements

Outer Diameter_do	25
Wall thickness_s	2,3

### Packaging

Packaging GTIN PL1	06414905413157
Packaging GTIN PL4	06414905413164
Packaging Height PL1	600
Packaging Height PL4	950
Packaging Length PL1	800
Packaging Length PL4	1200
Packaging Quantity PL1	220
Packaging Quantity PL4	440
Packaging Type PL1	Base_Box
Packaging Type PL4	Pallet
Packaging Volume PL1	0,384
Packaging Volume PL4	0,912

Packaging Weight PL1	37,06
Packaging Weight PL4	104,5
Packaging Width PL1	800
Packaging Width PL4	800

## Technical documents

Download documents here 

### Uponor UK

Blackmor Lane The Pavilion  
WD18 8GA, Watford  
UK

T +44 (0)1923 927000  
E [enquiries.uk@uponor.com](mailto:enquiries.uk@uponor.com)

[www.uponor.com/en-gb](http://www.uponor.com/en-gb)