
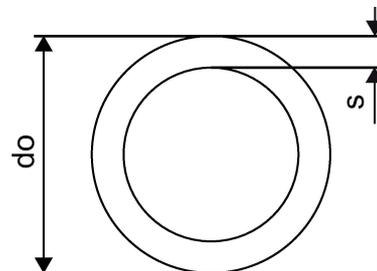


Uponor Comfort Pipe PLUS 25x2,3 300m

1062889

- 6 bar at 80°C
- Application class 4 and 5

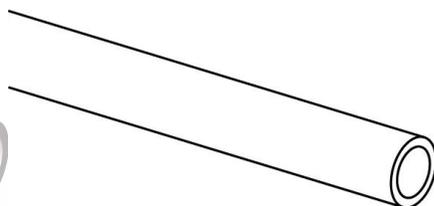

About Uponor Comfort Pipe PLUS

Specification


- Pipes manufactured from peroxide cross-linked polyethylene (PE-Xa) acc. BS EN ISO 15875
- EVOH (ethylene vinyl alcohol) layer for oxygen diffusion resistance as per DIN 4726
- 5layer
- Outside white PE layer designed to protect against mechanical damages
- Application class 4/5 - Underfloor heating and low temperature radiators
- Fire class E according to BS EN 13501-1.

Application

- Underfloor heating and low temperature radiators
- Heating
- Max design temperature: 80°C
- Malfunction temperature 100°C
- Design pressure 6 Bar at 70°C

Uponor Comfort Pipe PLUS 25x2,3 300m

1062889

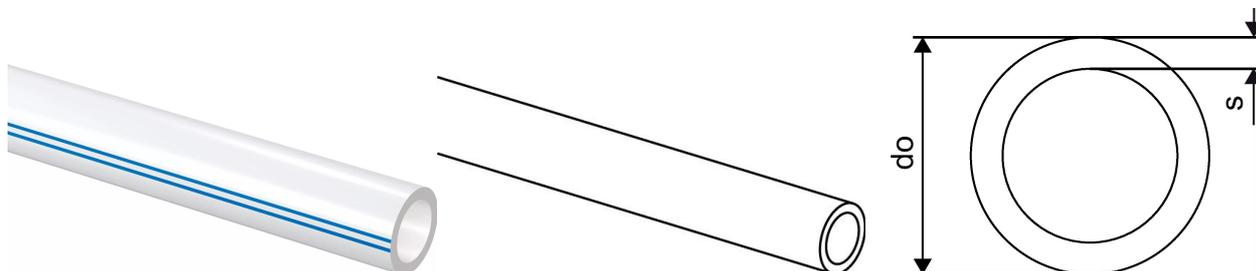

Product code

Item no EAN	7321500056551
Item no GF	35001062889
Item no GTIN	07321500056551
Item no LVI	2022045
Item no RSK	2419795
Item no VVS	087225130

Dimensions

Item Unit Height	25
Item Unit Length	1000
Item Unit Weight	0,168
Item Unit Width	25
Item_UOM	m

Measurements

Outer Diameter_do	25
Wall thickness_s	2,3

Packaging

Packaging GTIN PL1	06414905413171
Packaging GTIN PL4	06414905413188
Packaging Height PL1	590
Packaging Height PL4	950
Packaging Length PL1	800
Packaging Length PL4	1200
Packaging Quantity PL1	300
Packaging Quantity PL4	600
Packaging Type PL1	Base_Box
Packaging Type PL4	Pallet
Packaging Volume PL1	0,3776

Packaging Volume PL4	0,912
Packaging Weight PL1	54,8
Packaging Weight PL4	109,6
Packaging Width PL1	800
Packaging Width PL4	800

Technical documents

Download documents here 

Uponor UK

Blackmor Lane The Pavilion
WD18 8GA, Watford
UK

T +44 (0)1923 927000
E enquiries.uk@uponor.com

www.uponor.com/en-gb