Product data sheet




GF Uponor Uni Pipe PLUS white in conduit 20x2,25 - 28/23 blue 75m

1063060

- Coil
- Pipe in conduit

- Uponor Uni-Pipe PLUS 'Pipe-in-Conduit' should be used in solid foors to comply with the Water Regulations (water fittings) 1999. No ducting is necessary, and pipes can subsequently be withdrawn and replaced if required. Uponor Multilayer pipes are not affected by standard concrete or screeds.

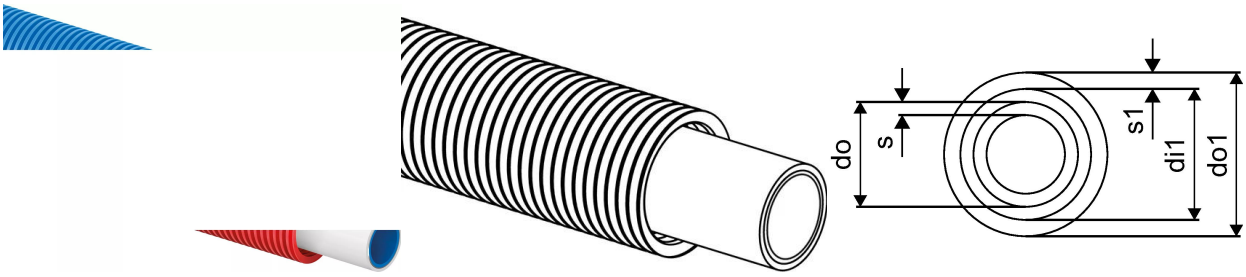

About GF Uponor Uni Pipe PLUS white in conduit

Specification

Uponor Uni Pipe PLUS Seamless Aluminium Composite (SAC).

PE-RT/AL/PE-RT - 5 layer composite pipe consisting of an Aluminium pipe (100% oxygen-proof diffusion barrier, exceeding the requirements of DIN 4726), bonded to an inner layer of PE-RT (Polyethylene Raised Temperature), and outer layer of white PE-RT (Polyethylene Raised Temperature)
- Manufactured to BS EN ISO 21003-1 2008.
- Pipes are marked at 1m intervals with full production data in accordance with the requirements of the standard.
- Sizes 14-32 mm supplied as flexible coils
- Sizes 16-32 mm as extra rigid straight lengths.

Application

Tested/approved according to BS EN ISO 21003 Multilayer piping systems for hot and cold water installations inside buildings for application class 1,2,4,5/10bar

Domestic water services: The permanent operating temperature from 20°C to 70°C at a maximum permanent operating pressure of 10 bar. The short-term malfunction temperature is 95°C for a period of 100 hours in the operating life time.

Domestic cold water services : where the water temperature does not exceed 20°C at a maximum permanent operating pressure of 16bar.


Heating: The permanent operating temperature ranges up to 80°C at a maximum permanent operating pressure of 10 bar. The short-term malfunction temperature is 100°C for a period of 100 hours in the operating life time.

Certification

UK Reg4 approval
- WRAS or
- KIWA
To meet the requirements of the
Water Supply (Water Fittings) Regulations 1999

GF Uponor Uni Pipe PLUS white in conduit 20x2,25 - 28/23 blue 75m

1063060

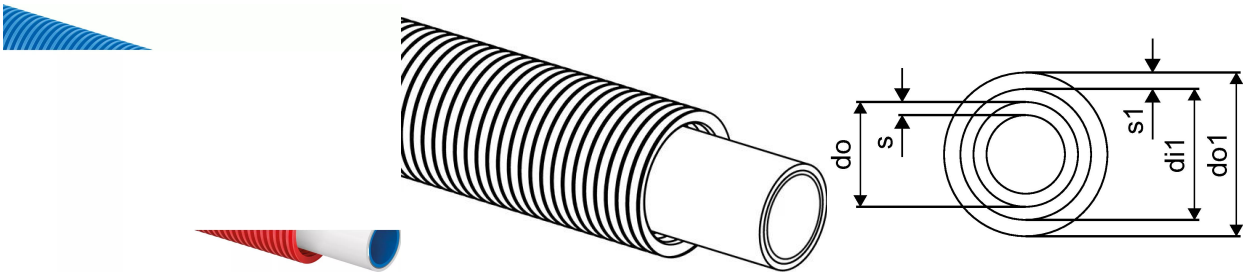

Measurements

Inner_diameter_di1	23
Outer Diameter_do	20
Outer Diameter_do1	28
Wall thickness_s	2,3
Wall thickness_s1	2,5

Product code

Item no EAN	4021598122994
Item no GF	35001063060
Item no GTIN	04021598122994
Item no VVS	087482420

Dimensions

Item Unit Height	28
Item Unit Length	1000
Item Unit Weight	0,251
Item Unit Width	28
Item_UOM	m

Status

MTO (longer delivery times)	Item available on request, minimum lead time 2 weeks

Packaging

Packaging GTIN PL1	06414905413218
Packaging GTIN PL4	06414905413225
Packaging Height PL1	195
Packaging Height PL4	2000
Packaging Length PL1	800
Packaging Length PL4	1200

Packaging Quantity PL1	75
Packaging Quantity PL4	900
Packaging Type PL1	Base_Box
Packaging Type PL4	Pallet
Packaging Volume PL1	0,12324
Packaging Volume PL4	1,92
Packaging Weight PL1	19,013
Packaging Weight PL4	250,9
Packaging Width PL1	790
Packaging Width PL4	800

Technical documents

Download documents here

Excellence in Flow

Visit our webpage to get in contact with your local specialist:
www.georgfischer.com/locations



Uponor UK

Blackmor Lane The Pavillion
WD18 8GA, Watford
UK

T +44 (0)1923 381212
E customerservice.uk.bfs@georgfischer.com

www.uponor.com/en-gb

+GF+