


## Uponor Uni Pipe PLUS white in conduit 16x2,0 - 25/20 red 75m

**1063061**

- Coil
- Pipe in conduit

- Uponor Uni-Pipe PLUS 'Pipe-in-Conduit' should be used in solid floors to comply with the Water Regulations (water fittings) 1999. No ducting is necessary, and pipes can subsequently be withdrawn and replaced if required. Uponor Multilayer pipes are not affected by standard concrete or screeds.

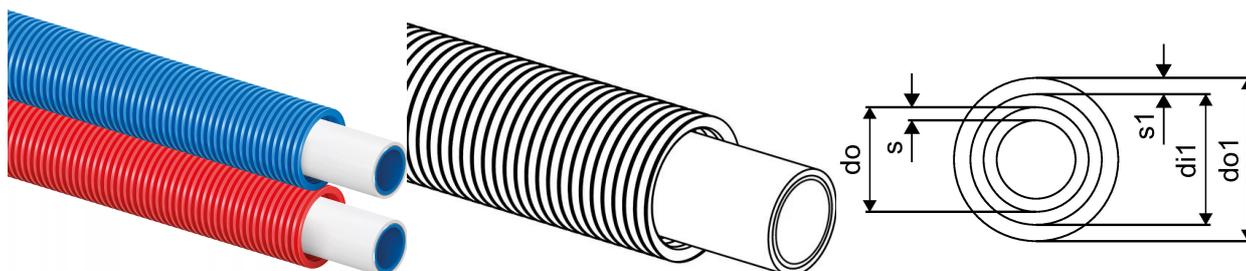

## About Uponor UNI PIPE PLUS white in conduit

### Specification

Uponor Uni Pipe PLUS Seamless Aluminium Composite (SAC).

PE-RT/AL/PE-RT - 5 layer composite pipe consisting of an Aluminium pipe (100% oxygen-proof diffusion barrier, exceeding the requirements of DIN 4726), bonded to an inner layer of PE-RT (Polyethylene Raised Temperature), and outer layer of white PE-RT (Polyethylene Raised Temperature)

- Manufactured to BS EN ISO 21003-1 2008.
- Pipes are marked at 1m intervals with full production data in accordance with the requirements of the standard.
- Sizes 14-32 mm supplied as flexible coils
- Sizes 16-32 mm as extra rigid straight lengths.

### Application

Tested/approved according to BS EN ISO 21003 Multilayer piping systems for hot and cold water installations inside buildings for application class 1,2,4,5/10bar

Domestic water services: The permanent operating temperature from 20°C to 70°C at a maximum permanent operating pressure of 10 bar. The short-term malfunction temperature is 95°C for a period of 100 hours in the operating life time.

Domestic cold water services : where the water temperature does not exceed 20°C at a maximum permanent operating pressure of 16bar.

Heating: The permanent operating temperature ranges up to 80°C at a maximum permanent operating pressure of 10 bar. The short-term malfunction temperature is 100°C for a period of 100 hours in the operating life time.

### Certification


UK Reg4 approval

- WRAS or
- KIWA

To meet the requirements of the Water Supply (Water Fittings) Regulations 1999

## Uponor Uni Pipe PLUS white in conduit 16x2,0 - 25/20 red 75m

1063061

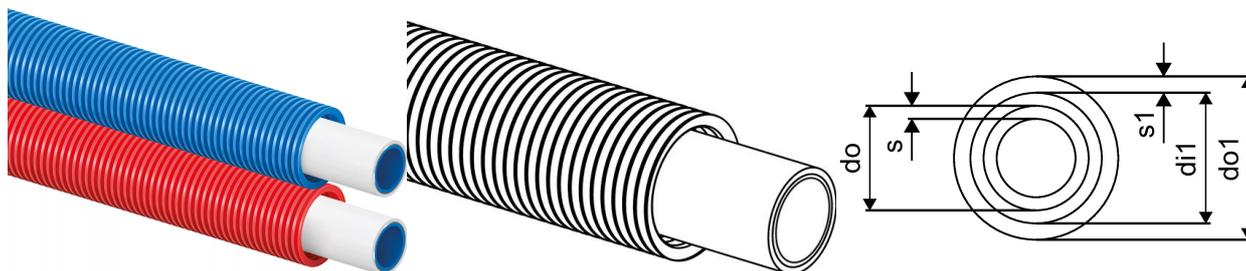

### Measurements

Inner_diameter_di1	20
Outer Diameter_do	16
Outer Diameter_do1	25
Wall thickness_s	2
Wall thickness_s1	2,5

### Product code

Item no EAN	4021598123007
Item no GF	35001063061
Item no GTIN	04021598123007
Item no VVS	087482316

### Dimensions

Item Unit Height	25
Item Unit Length	1000
Item Unit Weight	0,18
Item Unit Width	25
Item_UOM	m

### Status

MTO (longer delivery times)

Item available on request, minimum lead time 2 weeks

### Packaging

Packaging GTIN PL1	06414905413232
Packaging GTIN PL4	06414900299411
Packaging Height PL1	130
Packaging Height PL4	2000
Packaging Length PL1	800
Packaging Length PL4	1200
Packaging Quantity PL1	75
Packaging Quantity PL4	1125

Packaging Type PL1	Base_Box
Packaging Type PL4	Pallet
Packaging Volume PL1	0,08216
Packaging Volume PL4	1,92
Packaging Weight PL1	13,635
Packaging Weight PL4	233
Packaging Width PL1	790
Packaging Width PL4	800

## Technical documents

Download documents here 

### Uponor UK

Blackmor Lane The Pavilion  
WD18 8GA, Watford  
UK

T +44 (0)1923 927000  
E [enquiries.uk@uponor.com](mailto:enquiries.uk@uponor.com)

[www.uponor.com/en-gb](http://www.uponor.com/en-gb)