


Uponor Uni Pipe PLUS white in conduit 20x2,25 - 28/23 red 75m

1063062

- Coil
- Pipe in conduit

- Uponor Uni-Pipe PLUS 'Pipe-in-Conduit' should be used in solid floors to comply with the Water Regulations (water fittings) 1999. No ducting is necessary, and pipes can subsequently be withdrawn and replaced if required. Uponor Multilayer pipes are not affected by standard concrete or screeds.

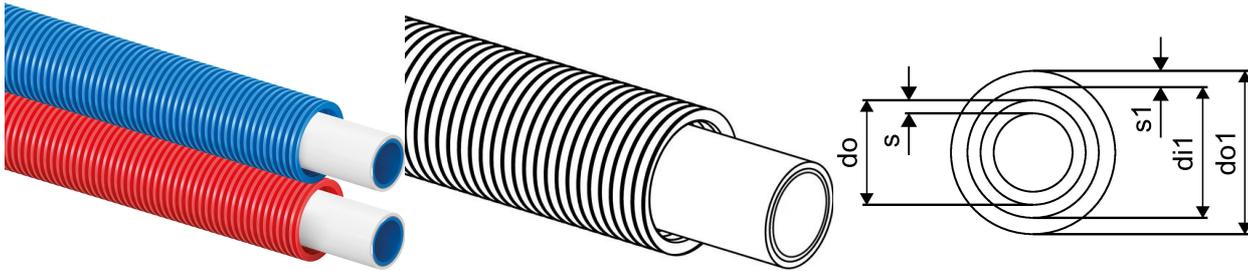

About Uponor UNI PIPE PLUS white in conduit

Specification

Uponor Uni Pipe PLUS Seamless Aluminium Composite (SAC).

PE-RT/AL/PE-RT - 5 layer composite pipe consisting of an Aluminium pipe (100% oxygen-proof diffusion barrier, exceeding the requirements of DIN 4726), bonded to an inner layer of PE-RT (Polyethylene Raised Temperature), and outer layer of white PE-RT (Polyethylene Raised Temperature)

- Manufactured to BS EN ISO 21003-1 2008.
- Pipes are marked at 1m intervals with full production data in accordance with the requirements of the standard.
- Sizes 14-32 mm supplied as flexible coils
- Sizes 16-32 mm as extra rigid straight lengths.

Application

Tested/approved according to BS EN ISO 21003 Multilayer piping systems for hot and cold water installations inside buildings for application class 1,2,4,5/10bar

Domestic water services: The permanent operating temperature from 20°C to 70°C at a maximum permanent operating pressure of 10 bar. The short-term malfunction temperature is 95°C for a period of 100 hours in the operating life time.

Domestic cold water services : where the water temperature does not exceed 20°C at a maximum permanent operating pressure of 16bar.

Heating: The permanent operating temperature ranges up to 80°C at a maximum permanent operating pressure of 10 bar. The short-term malfunction temperature is 100°C for a period of 100 hours in the operating life time.

Certification


UK Reg4 approval

- WRAS or
- KIWA

To meet the requirements of the Water Supply (Water Fittings) Regulations 1999

Uponor Uni Pipe PLUS white in conduit 20x2,25 - 28/23 red 75m

1063062

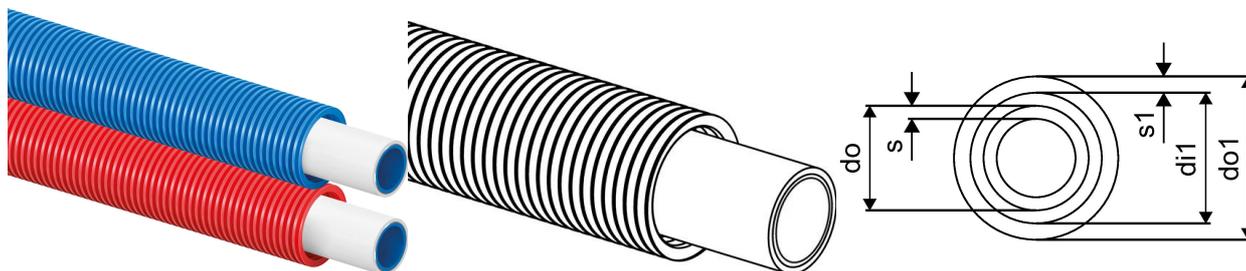

Measurements

| | |
|--------------------|-----|
| Inner_diameter_di1 | 23 |
| Outer Diameter_do | 20 |
| Outer Diameter_do1 | 28 |
| Wall thickness_s | 2,3 |
| Wall thickness_s1 | 2,5 |

Product code

| | |
|--------------|----------------|
| Item no EAN | 4021598123014 |
| Item no GF | 35001063062 |
| Item no GTIN | 04021598123014 |
| Item no VVS | 087482320 |

Dimensions

| | |
|------------------|-------|
| Item Unit Height | 28 |
| Item Unit Length | 1000 |
| Item Unit Weight | 0,251 |
| Item Unit Width | 28 |
| Item_UOM | m |

Status

MTO (longer delivery times)

Item available on request, minimum lead time 2 weeks

Packaging

| | |
|------------------------|----------------|
| Packaging GTIN PL1 | 06414905413256 |
| Packaging GTIN PL4 | 06414905413263 |
| Packaging Height PL1 | 195 |
| Packaging Height PL4 | 2000 |
| Packaging Length PL1 | 800 |
| Packaging Length PL4 | 1200 |
| Packaging Quantity PL1 | 75 |
| Packaging Quantity PL4 | 900 |

| | |
|----------------------|----------|
| Packaging Type PL1 | Base_Box |
| Packaging Type PL4 | Pallet |
| Packaging Volume PL1 | 0,12324 |
| Packaging Volume PL4 | 1,92 |
| Packaging Weight PL1 | 19,013 |
| Packaging Weight PL4 | 250,9 |
| Packaging Width PL1 | 790 |
| Packaging Width PL4 | 800 |

Technical documents

Download documents here 

Uponor UK

Blackmor Lane The Pavilion
WD18 8GA, Watford
UK

T +44 (0)1923 927000
E enquiries.uk@uponor.com

www.uponor.com/en-gb