Product data sheet



GF Uponor Comfort Pipe Minitec 9,9x1,1 60m

1063287

- Material: PE-Xa

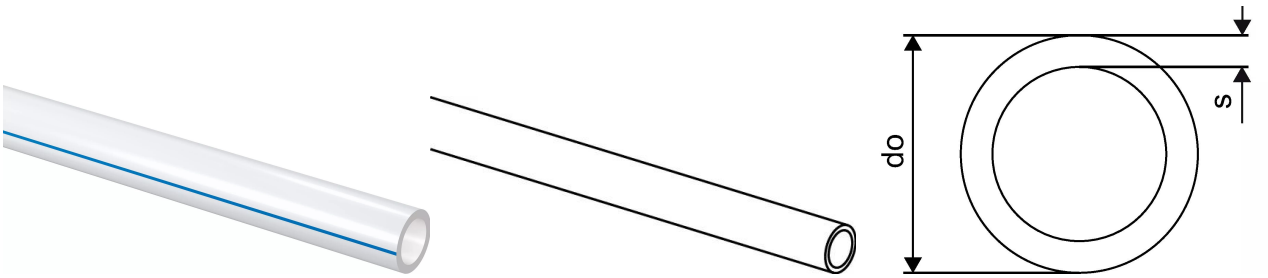

About GF Uponor Comfort Pipe Minitec

Specification

- Pipes manufactured from cross-linked polyethylene (PE-Xa) acc. BS EN ISO 15875
- EVOH (ethylene vinyl alcohol) layer for oxygen diffusion resistance as per DIN 4726
- Application class 4 - Underfloor heating and low tempertaure radiators
- Fire class E according to BS EN 13501-1.

Application

- Underfloor heating and low tempertaure radiators
- Max design temperature: 80°C
- Malfunction temperature 100°C
- Design pressure 6 Bar at 70°C

GF Uponor Comfort Pipe Minitec 9,9x1,1 60m

1063287

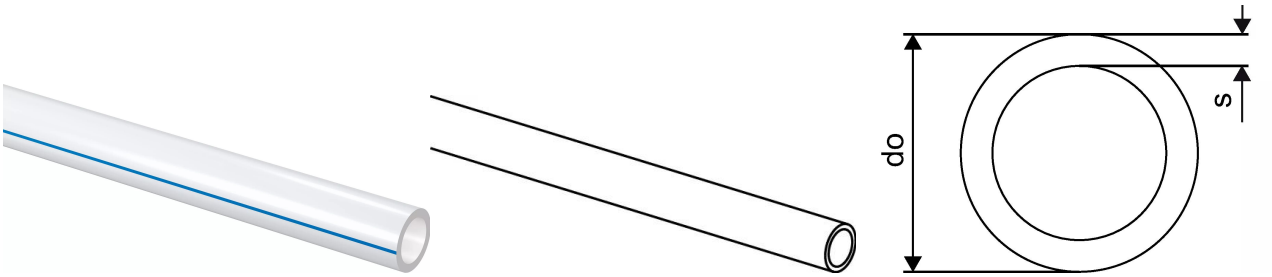

Product code

Item no EAN	7321500056667
Item no GF	35001063287
Item no GTIN	07321500056667
Item no LVI	2012142
Item no NOBB	50387574
Item no NRF	8361054
Item no RSK	2419973
Item no VVS	087230066

Dimensions

Item Unit Height	10
Item Unit Length	1000
Item Unit Weight	0,038
Item Unit Width	10
Item_UOM	m

Status

MTO (longer delivery times)	Item available on request, minimum lead time 2 weeks

Measurements

Outer Diameter_do	9,9
Wall thickness_s	1,1

Packaging

Packaging GTIN PL1	06414905413331
Packaging GTIN PL4	06414905413348
Packaging Height PL1	67
Packaging Height PL4	950
Packaging Length PL1	780

Packaging Length PL4	1200
Packaging Quantity PL1	60
Packaging Quantity PL4	840
Packaging Type PL1	Base_Box
Packaging Type PL4	Pallet
Packaging Volume PL1	0,0407628
Packaging Volume PL4	0,912
Packaging Weight PL1	3,816
Packaging Weight PL4	111,7
Packaging Width PL1	780
Packaging Width PL4	800

Technical documents

Download documents here

Excellence in Flow

Visit our webpage to get in contact with your local specialist:
www.georgfischer.com/locations



Uponor UK

Blackmor Lane The Pavillion
WD18 8GA, Watford
UK

T +44 (0)1923 381212
E customerservice.uk.bfs@georgfischer.com

www.uponor.com/en-gb

+GF+