
Product data sheet



GF Uponor Uni Pipe PLUS white insulated S6 WLS 035 20x2,25 blue 75m

1063557

- Coil
- Insulation thickness 6 mm
- Thermal conductivity λ=0,035 W/m*k
- Round extruded
- Fire Class E to BS EN 13501-1

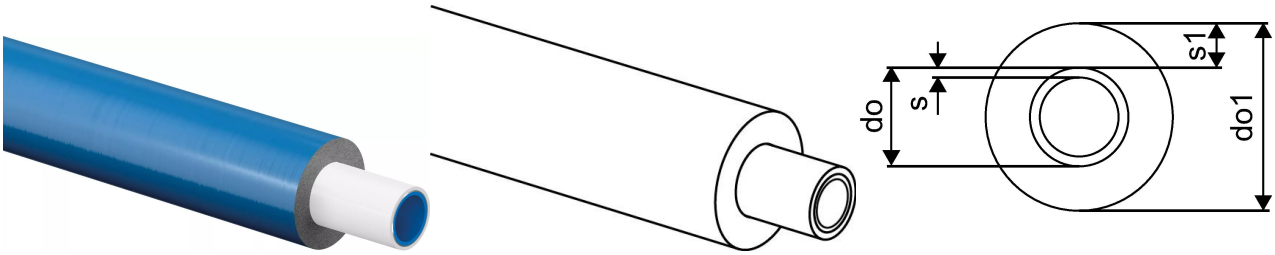

About GF Uponor Uni Pipe PLUS white insulated S6 WLS 035

Specification

Uponor Uni Pipe PLUS Seamless Aluminium Composite (SAC).

PE-RT/AL/PE-RT - 5 layer composite pipe consisting of an Aluminium pipe (100% oxygen-proof diffusion barrier, exceeding the requirements of DIN 4726), bonded to an inner layer of PE-RT (Polyethylene Raised Temperature), and outer layer of white PE-RT (Polyethylene Raised Temperature)
- Manufactured to BS EN ISO 21003-1 2008.
- Pipes are marked at 1m intervals with full production data in accordance with the requirements of the standard.
- Sizes 14-32 mm supplied as flexible coils
- Sizes 16-32 mm as extra rigid straight lengths.

Application

Tested/approved according to BS EN ISO 21003 Multilayer piping systems for hot and cold water installations inside buildings for application class 1,2,4,5/10bar

Domestic water services: The permanent operating temperature from 20°C to 70°C at a maximum permanent operating pressure of 10 bar. The short-term malfunction temperature is 95°C for a period of 100 hours in the operating life time.

Domestic cold water services : where the water temperature does not exceed 20°C at a maximum permanent operating pressure of 16bar.


Heating: The permanent operating temperature ranges up to 80°C at a maximum permanent operating pressure of 10 bar. The short-term malfunction temperature is 100°C for a period of 100 hours in the operating life time.

Certification

UK Reg4 approval
- WRAS or
- KIWA
To meet the requirements of the
Water Supply (Water Fittings) Regulations 1999

GF Uponor Uni Pipe PLUS white insulated S6 WLS 035 20x2,25 blue 75m

1063557

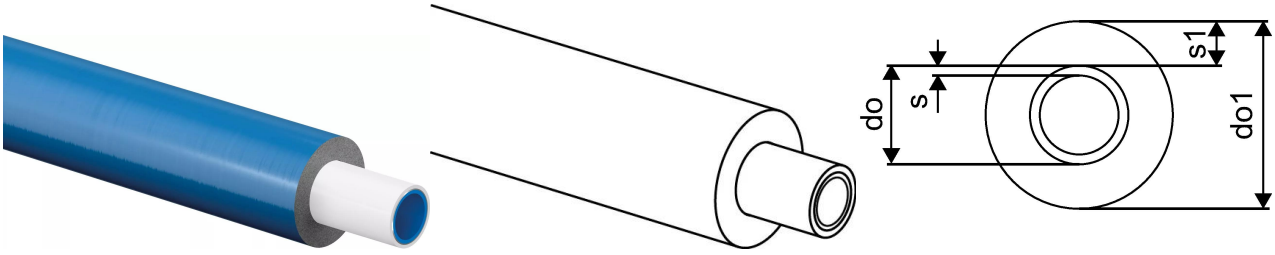

Product code

Item no EAN	4021598124479
Item no GF	35001063557
Item no GTIN	04021598124479
Item no VVS	087483120

Dimensions

Item Unit Height	32
Item Unit Length	1000
Item Unit Weight	0,192
Item Unit Width	32
Item_UOM	m

Measurements

Outer Diameter_do	20
Outer Diameter_do1	32
Wall thickness_s	2,25
Wall thickness_s1	6

Packaging

Packaging GTIN PL1	06414905413485
Packaging GTIN PL4	06414905413492
Packaging Height PL1	295
Packaging Height PL4	2000
Packaging Length PL1	780
Packaging Length PL4	1200
Packaging Quantity PL1	75
Packaging Quantity PL4	600
Packaging Type PL1	Base_Box

Packaging Type PL4	Pallet
Packaging Volume PL1	0,179478
Packaging Volume PL4	1,92
Packaging Weight PL1	14,544
Packaging Weight PL4	140,2
Packaging Width PL1	780
Packaging Width PL4	800

Technical documents

Download documents here

Excellence in Flow

Visit our webpage to get in contact with your local specialist:
www.georgfischer.com/locations



Uponor UK

Blackmor Lane The Pavillion
WD18 8GA, Watford
UK

T +44 (0)1923 381212
E customerservice.uk.bfs@georgfischer.com

www.uponor.com/en-gb

+GF+