
Product data sheet



GF Uponor Uni Pipe PLUS white insulated S6 WLS 035 25x2,5 blue 50m

1063558

- Coil
- Insulation thickness 6 mm
- Thermal conductivity λ=0,035 W/m*k
- Round extruded
- Fire Class E to BS EN 13501-1

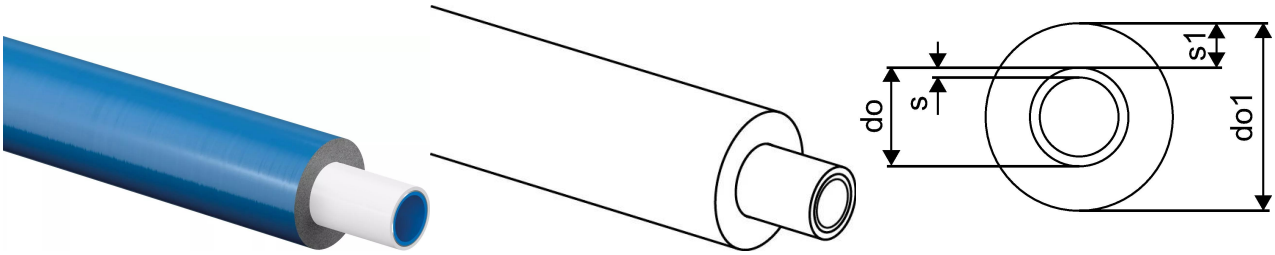

About GF Uponor Uni Pipe PLUS white insulated S6 WLS 035

Specification

Uponor Uni Pipe PLUS Seamless Aluminium Composite (SAC).

PE-RT/AL/PE-RT - 5 layer composite pipe consisting of an Aluminium pipe (100% oxygen-proof diffusion barrier, exceeding the requirements of DIN 4726), bonded to an inner layer of PE-RT (Polyethylene Raised Temperature), and outer layer of white PE-RT (Polyethylene Raised Temperature)
- Manufactured to BS EN ISO 21003-1 2008.
- Pipes are marked at 1m intervals with full production data in accordance with the requirements of the standard.
- Sizes 14-32 mm supplied as flexible coils
- Sizes 16-32 mm as extra rigid straight lengths.

Application

Tested/approved according to BS EN ISO 21003 Multilayer piping systems for hot and cold water installations inside buildings for application class 1,2,4,5/10bar

Domestic water services: The permanent operating temperature from 20°C to 70°C at a maximum permanent operating pressure of 10 bar. The short-term malfunction temperature is 95°C for a period of 100 hours in the operating life time.

Domestic cold water services : where the water temperature does not exceed 20°C at a maximum permanent operating pressure of 16bar.


Heating: The permanent operating temperature ranges up to 80°C at a maximum permanent operating pressure of 10 bar. The short-term malfunction temperature is 100°C for a period of 100 hours in the operating life time.

Certification

UK Reg4 approval
- WRAS or
- KIWA
To meet the requirements of the
Water Supply (Water Fittings) Regulations 1999

GF Uponor Uni Pipe PLUS white insulated S6 WLS 035 25x2,5 blue 50m

1063558

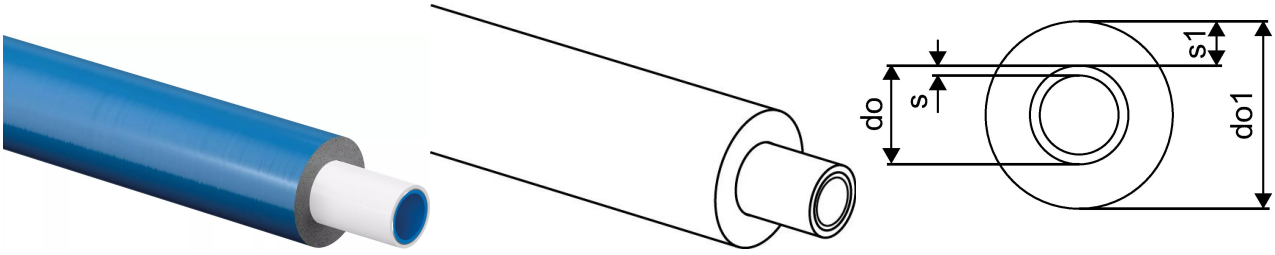

Product code

Item no EAN	4021598124486
Item no GF	35001063558
Item no GTIN	04021598124486
Item no VVS	087483125

Dimensions

Item Unit Height	37
Item Unit Length	1000
Item Unit Weight	0,272
Item Unit Width	37
Item_UOM	m

Measurements

Outer Diameter_do	25
Outer Diameter_do1	37
Wall thickness_s	2,5
Wall thickness_s1	6

Packaging

Packaging GTIN PL1	06414905413508
Packaging GTIN PL4	06414905413515
Packaging Height PL1	205
Packaging Height PL4	2000
Packaging Length PL1	1140
Packaging Length PL4	1140
Packaging Quantity PL1	50
Packaging Quantity PL4	400
Packaging Type PL1	Base_Box

Packaging Type PL4	Pallet
Packaging Volume PL1	0,266418
Packaging Volume PL4	2,5992
Packaging Weight PL1	13,736
Packaging Weight PL4	119,3
Packaging Width PL1	1140
Packaging Width PL4	1140

Technical documents

Download documents here

Excellence in Flow

Visit our webpage to get in contact with your local specialist:
www.georgfischer.com/locations



Uponor UK

Blackmor Lane The Pavillion
WD18 8GA, Watford
UK

T +44 (0)1923 381212
E customerservice.uk.bfs@georgfischer.com

www.uponor.com/en-gb

+GF+