


Uponor Comfort Pipe PLUS 25x2,3 640m

1063907

- 6 bar at 90°C
- Application class 4 and 5

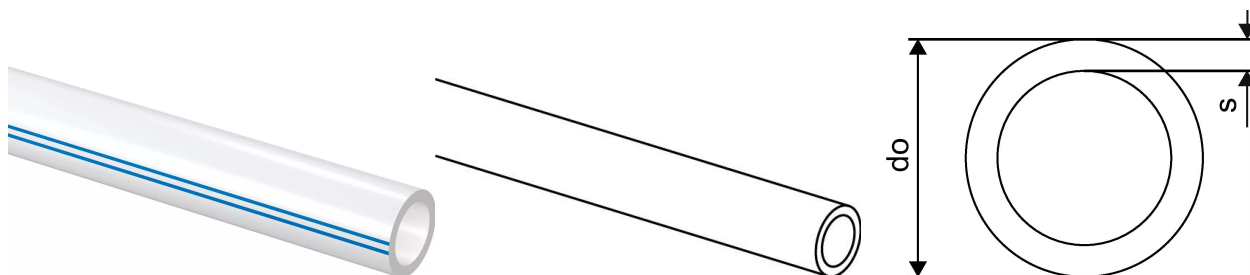

About Uponor Comfort Pipe PLUS

Specification


- Pipes manufactured from peroxide cross-linked polyethylene (PE-Xa) acc. EN ISO 15875
- EVOH (ethylene vinyl alcohol) layer for oxygen diffusion resistance as per DIN 4726
- 5layer
- Outside white PE layer designed to protect against mechanical damages
- Application class 4/5 - Underfloor heating and low temperature radiators
- Fire classification E according to DIN EN 13501-1.

Application

- Underfloor heating and low temperature radiators
- Heating
- Max design temperature: 90°C
- Malfunction temperature 100°C
- Design pressure 6 Bar at 70°C

Uponor Comfort Pipe PLUS 25x2,3 640m

1063907

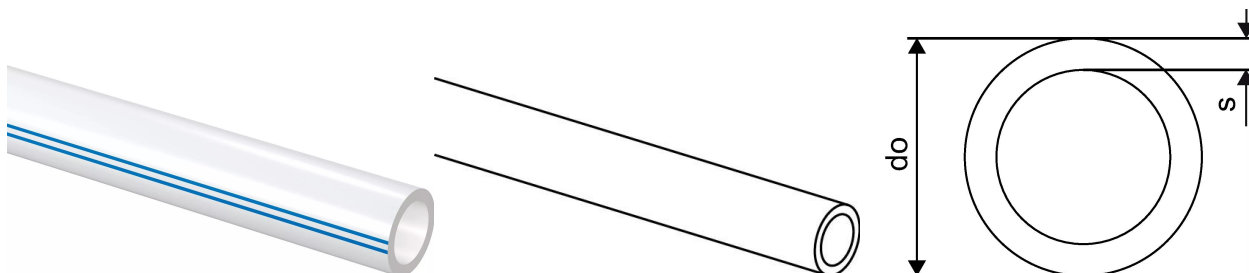

Technical data

Item no EAN	7321500056735
Item no GTIN	07321500056735
Item no VVS	087225164
RSK no.	2419900
Item no LVI	2012138
Item (unit of measurement)	m
Packaging Quantity 1	640
Packaging GTIN PL1	06414905414918
Item Unit Height	25 mm
Item Unit Weight	0,16 kg
Item Unit Width	25 mm

Technical documents

Download documents here

Uponor UK

Blackmor Lane The Pavilion
WD18 8GA, Watford
UK

T +44 (0)1923 927000
E enquiries.uk@uponor.com

www.uponor.com/en-gb