


## Uponor Comfort Pipe PLUS 25x2,3 640m

1063907

- 6 bar at 80°C
- Application class 4 and 5

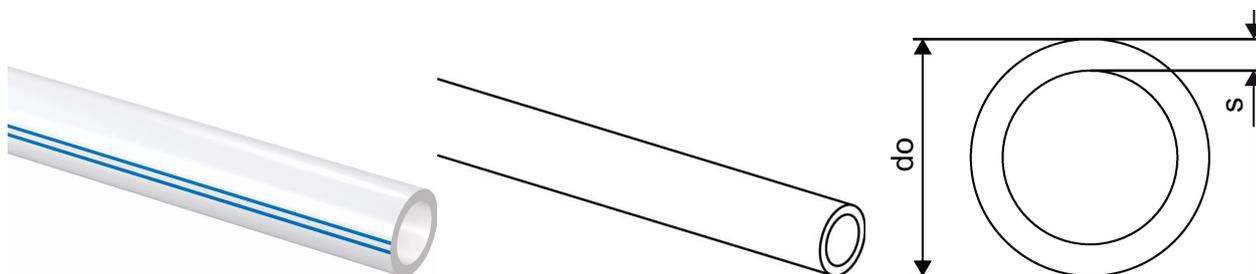

### About Uponor Comfort Pipe PLUS

#### Specification


- Pipes manufactured from peroxide cross-linked polyethylene (PE-Xa) acc. BS EN ISO 15875
- EVOH (ethylene vinyl alcohol) layer for oxygen diffusion resistance as per DIN 4726
- 5layer
- Outside white PE layer designed to protect against mechanical damages
- Application class 4/5 - Underfloor heating and low temperature radiators
- Fire class E according to BS EN 13501-1.

#### Application

- Underfloor heating and low temperature radiators
- Heating
- Max design temperature: 80°C
- Malfunction temperature 100°C
- Design pressure 6 Bar at 70°C

## Uponor Comfort Pipe PLUS 25x2,3 640m

1063907

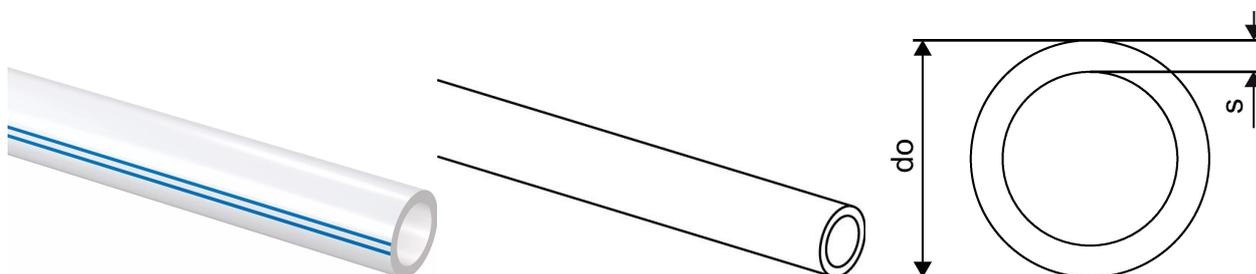

### Product code

Item no EAN	7321500056735
Item no GF	35001063907
Item no GTIN	07321500056735
Item no LVI	2012138
Item no RSK	2419900
Item no VVS	087225164

### Dimensions

Item Unit Height	25
Item Unit Length	1000
Item Unit Weight	0,168
Item Unit Width	25
Item_UOM	m

### Status

MTO (longer delivery times)	Item available on request, minimum lead time 2 weeks
-----------------------------	--

### Measurements

Outer Diameter_do	25
Wall thickness_s	2,3

### Packaging

Packaging GTIN PL1	06414905414918
Packaging Height PL1	580
Packaging Length PL1	1050
Packaging Quantity PL1	640
Packaging Type PL1	Coil
Packaging Volume PL1	0,63945
Packaging Weight PL1	102,4
Packaging Width PL1	1050

## Technical documents

Download documents here 

### Uponor UK

Blackmor Lane The Pavilion  
WD18 8GA, Watford  
UK

T +44 (0)1923 927000  
E [enquiries.uk@uponor.com](mailto:enquiries.uk@uponor.com)

[www.uponor.com/en-gb](http://www.uponor.com/en-gb)