


## Uponor S-Press PLUS adapter female thread 25-Rp1"FT

**1070520**

- Made of tin-plated DZR brass

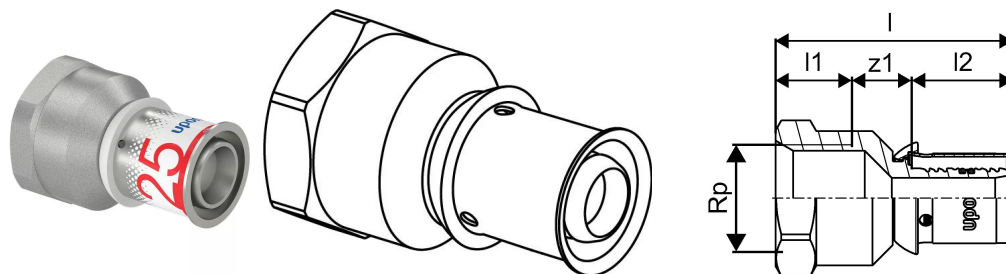

### About Uponor S-Press PLUS adapter female thread

#### Specification

- Unique press indicator foil
- Fast 3-step installation (press without bevel)
- Innovative QR code for immediate digital access
- Colour coded
- Fixed press sleeve with inspection windows
- Precise jaw location
- Fast diameter recognition
- Accurate test safety function
- 100% backward compatible with existing Uponor components
- Flow rate optimized fitting body

#### Application

Tested/approved according to BS EN ISO 21003 Multilayer piping systems for hot and cold water installations inside buildings for application class 1,2,4,5/10bar

Domestic water services: The permanent operating temperature from 20°C to 70°C at a maximum permanent operating pressure of 10 bar. The short-term malfunction temperature is 95°C for a period of 100 hours in the operating life time.

Domestic cold water services : where the water temperature does not exceed 20°C at a maximum permanent operating pressure of 16bar.

Heating: The permanent operating temperature ranges up to 80°C at a maximum permanent operating pressure of 10 bar. The short-term malfunction temperature is 100°C for a period of 100 hours in the operating life time.

#### Certification


UK Reg4 approval

- WRAS or
- KIWA

to meet the requirements of the Water Supply (Water Fittings) Regulations 1999

## Uponor S-Press PLUS adapter female thread 25-Rp1"FT

1070520

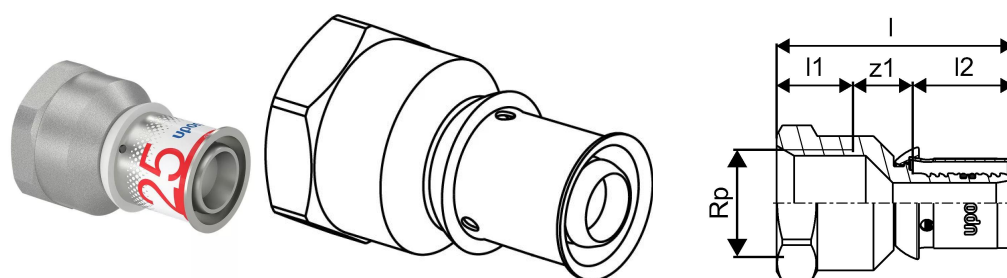

### Measurements

|                  |      |
|------------------|------|
| Female thread Rp | 1    |
| LENGTH_L         | 59,1 |
| Length (l1)      | 19,1 |
| Length (l2)      | 28,3 |
| z1               | 11,7 |

### Product code

|              |                |
|--------------|----------------|
| Item no EAN  | 6414905218400  |
| Item no GF   | 35001070520    |
| Item no GTIN | 06414905218400 |
| Item no LVI  | 1720186        |
| Item no NOBB | 55171915       |
| Item no NRF  | 5114446        |
| Item no RSK  | 1899425        |
| Item no VVS  | 045482315      |

### Dimensions

|                  |       |
|------------------|-------|
| Item Unit Height | 44    |
| Item Unit Length | 59.1  |
| Item Unit Weight | 0,178 |
| Item Unit Width  | 41    |
| Item_UOM         | pce   |

### Packaging

|                      |                |
|----------------------|----------------|
| Packaging GTIN PL1   | 06414905468362 |
| Packaging GTIN PL3   | 06414905424122 |
| Packaging GTIN PL4   | 06414905499298 |
| Packaging Height PL1 | 89             |
| Packaging Height PL3 | 188            |
| Packaging Height PL4 | 708            |

|                        |             |
|------------------------|-------------|
| Packaging Length PL1   | 176         |
| Packaging Length PL3   | 277         |
| Packaging Length PL4   | 1200        |
| Packaging Quantity PL1 | 5           |
| Packaging Quantity PL3 | 40          |
| Packaging Quantity PL4 | 1920        |
| Packaging Type PL1     | Base_Box    |
| Packaging Type PL3     | Box         |
| Packaging Type PL4     | Pallet      |
| Packaging Volume PL1   | 0,001049488 |
| Packaging Volume PL3   | 0,009321604 |
| Packaging Volume PL4   | 0,67968     |
| Packaging Weight PL1   | 0,927       |
| Packaging Weight PL3   | 7,676       |
| Packaging Weight PL4   | 387,36      |
| Packaging Width PL1    | 67          |
| Packaging Width PL3    | 179         |
| Packaging Width PL4    | 800         |

## Technical documents

Download documents here 

### Uponor UK

Blackmor Lane The Pavilion  
WD18 8GA, Watford  
UK

T +44 (0)1923 927000  
E [enquiries.uk@uponor.com](mailto:enquiries.uk@uponor.com)

[www.uponor.com/en-gb](http://www.uponor.com/en-gb)