


## Uponor S-Press PLUS elbow male thread 16-R1/2"MT

### 1070532

- Made of tin-plated DZR brass
- Male thread to BS EN 10226-1

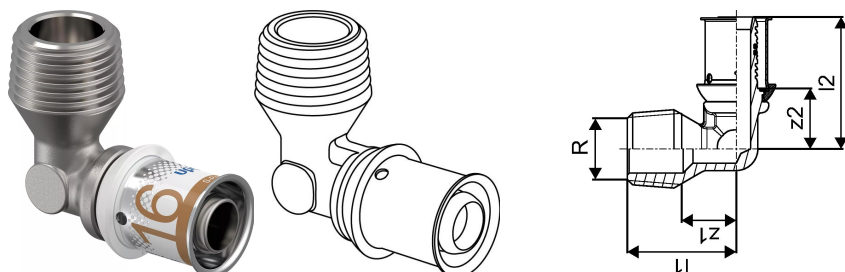

## About Uponor S-Press PLUS elbow male thread

### Specification

- Unique press indicator foil
- Fast 3-step installation (press without bevel)
- Innovative QR code for immediate digital access
- Colour coded
- Fixed press sleeve with inspection windows
- Precise jaw location
- Fast diameter recognition
- Accurate test safety function
- 100% backward compatible with existing Uponor components
- Flow rate optimized fitting body

### Application

Tested/approved according to BS EN ISO 21003 Multilayer piping systems for hot and cold water installations inside buildings for application class 1,2,4,5/10bar

Domestic water services: The permanent operating temperature from 20°C to 70°C at a maximum permanent operating pressure of 10 bar. The short-term malfunction temperature is 95°C for a period of 100 hours in the operating life time.

Domestic cold water services : where the water temperature does not exceed 20°C at a maximum permanent operating pressure of 16bar.

Heating: The permanent operating temperature ranges up to 80°C at a maximum permanent operating pressure of 10 bar. The short-term malfunction temperature is 100°C for a period of 100 hours in the operating life time.

### Certification


UK Reg4 approval

- WRAS or
- KIWA

to meet the requirements of the Water Supply (Water Fittings) Regulations 1999

## Uponor S-Press PLUS elbow male thread 16-R1/2"MT

1070532

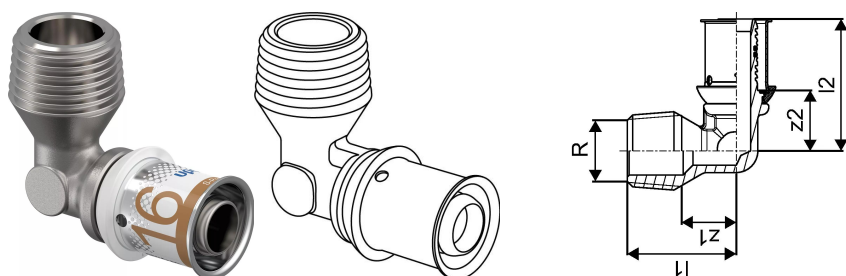

### Product code

Item no EAN	6414905218523
Item no GF	35001070532
Item no GTIN	06414905218523
Item no LVI	1720194
Item no NOBB	55172036
Item no NRF	5114459
Item no RSK	1896534
Item no VVS	045471189

### Dimensions

Item Unit Height	41
Item Unit Length	47
Item Unit Weight	0,063
Item Unit Width	22
Item_UOM	pce

### Measurements

Length (l1)	30,3
Length (l2)	36,5
Male_thread_R	1/2
z1	15,2
Z2	16,7

### Packaging

Packaging GTIN PL1	06414905634989
Packaging GTIN PL3	06414905424214
Packaging GTIN PL4	06414905283118
Packaging Height PL1	89
Packaging Height PL3	95
Packaging Height PL4	714

Packaging Length PL1	176
Packaging Length PL3	277
Packaging Length PL4	1200
Packaging Quantity PL1	20
Packaging Quantity PL3	80
Packaging Quantity PL4	7680
Packaging Type PL1	Base_Box
Packaging Type PL3	Box
Packaging Type PL4	Pallet
Packaging Volume PL1	0,001049488
Packaging Volume PL3	0,004710385
Packaging Volume PL4	0,68544
Packaging Weight PL1	1,298
Packaging Weight PL3	5,392
Packaging Weight PL4	542,632
Packaging Width PL1	67
Packaging Width PL3	179
Packaging Width PL4	800

## Technical documents

Download documents here 

### Uponor UK

Blackmor Lane The Pavilion  
WD18 8GA, Watford  
UK

T +44 (0)1923 927000  
E enquiries.uk@uponor.com

[www.uponor.com/en-gb](http://www.uponor.com/en-gb)