
Product data sheet




GF Uponor S-Press PLUS elbow male thread 90° MT 16-R1/2"

1070532

- Made of tin-plated DZR brass
- Male thread to BS EN 10226-1

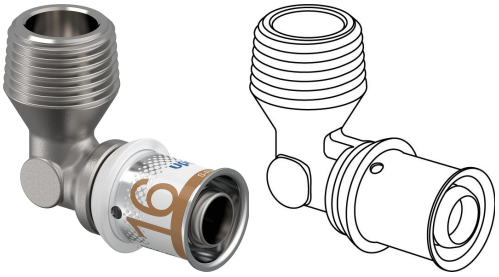



About GF Uponor S-Press PLUS elbow male thread 90° MT

Specification

- Unique press indicator foil
- Fast 3-step installation (press without bevel)
- Innovative QR code for immediate digital access
- Colour coded
- Fixed press sleeve with inspection windows
- Precise jaw location
- Fast diameter recognition
- Accurate test safety function
- 100% backward compatible with existing Uponor components
- Flow rate optimized fitting body

Application

Tested/approved according to BS EN ISO 21003 Multilayer piping systems for hot and cold water installations inside buildings for application class 1,2,4,5/10bar

Domestic water services: The permanent operating temperature from 20°C to 70°C at a maximum permanent operating pressure of 10 bar. The short-term malfunction temperature is 95°C for a period of 100 hours in the operating life time.

Domestic cold water services : where the water temperature does not exceed 20°C at a maximum permanent operating pressure of 16bar.


Heating: The permanent operating temperature ranges up to 80°C at a maximum permanent operating pressure of 10 bar. The short-term malfunction temperature is 100°C for a period of 100 hours in the operating life time.


Certification

UK Reg4 approval
- WRAS or
- KIWA
to meet the requirements of the Water Supply (Water Fittings) Regulations 1999

GF Uponor S-Press PLUS elbow male thread 90° MT 16-R1/2"

1070532

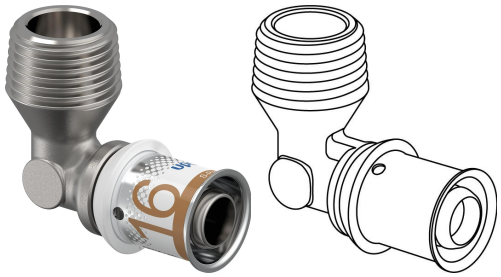



Product code

Item no EAN	6414905218523
Item no GF	35001070532
Item no GTIN	06414905218523
Item no LVI	1720194
Item no NOBB	55172036
Item no NRF	5114459
Item no RSK	1896534
Item no VVS	045471189

Dimensions

Item Unit Height	41.1
Item Unit Length	47.3
Item Unit Weight	0,063
Item Unit Width	21.9
Item_UOM	pce

Measurements

Length (l1)	30,3
Length (l2)	36,5
Male_thread_R	1/2
z1	15,2
Z2	16,7

Packaging

Packaging GTIN PL1	06414905634989
Packaging GTIN PL3	06414905424214
Packaging GTIN PL4	06414905283118
Packaging Height PL1	89

Packaging Height PL3	95
Packaging Height PL4	714
Packaging Length PL1	176
Packaging Length PL3	277
Packaging Length PL4	1200
Packaging Quantity PL1	20
Packaging Quantity PL3	80
Packaging Quantity PL4	7680
Packaging Type PL1	Base_Box
Packaging Type PL3	Box
Packaging Type PL4	Pallet
Packaging Volume PL1	0,001049488
Packaging Volume PL3	0,004710385
Packaging Volume PL4	0,68544
Packaging Weight PL1	1,298
Packaging Weight PL3	5,392
Packaging Weight PL4	542,632
Packaging Width PL1	67
Packaging Width PL3	179
Packaging Width PL4	800

Technical documents

Download documents here

Excellence in Flow

Visit our webpage to get in contact with your local specialist:
www.georgfischer.com/locations



Uponor UK

Blackmor Lane The Pavillion
WD18 8GA, Watford
UK

T +44 (0)1923 381212
E customerservice.uk.bfs@georgfischer.com

www.uponor.com/en-gb

+GF+