


Uponor S-Press PLUS elbow male thread 32-R1"MT

1070537

- Made of tin-plated DZR brass
- Male thread to BS EN 10226-1

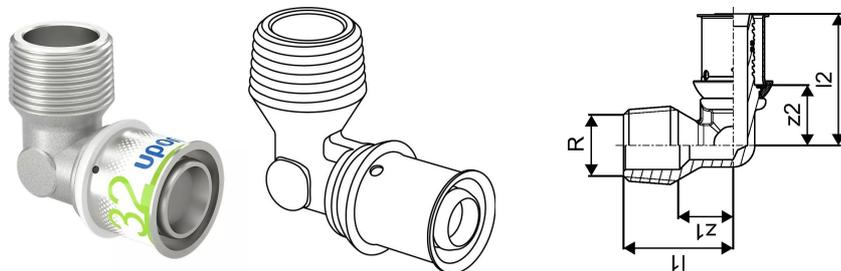

About Uponor S-Press PLUS elbow male thread

Specification

- Unique press indicator foil
- Fast 3-step installation (press without bevel)
- Innovative QR code for immediate digital access
- Colour coded
- Fixed press sleeve with inspection windows
- Precise jaw location
- Fast diameter recognition
- Accurate test safety function
- 100% backward compatible with existing Uponor components
- Flow rate optimized fitting body

Application

Tested/approved according to BS EN ISO 21003 Multilayer piping systems for hot and cold water installations inside buildings for application class 1,2,4,5/10bar

Domestic water services: The permanent operating temperature from 20°C to 70°C at a maximum permanent operating pressure of 10 bar. The short-term malfunction temperature is 95°C for a period of 100 hours in the operating life time.

Domestic cold water services : where the water temperature does not exceed 20°C at a maximum permanent operating pressure of 16bar.

Heating: The permanent operating temperature ranges up to 80°C at a maximum permanent operating pressure of 10 bar. The short-term malfunction temperature is 100°C for a period of 100 hours in the operating life time.

Certification


UK Reg4 approval

- WRAS or
- KIWA

to meet the requirements of the Water Supply (Water Fittings) Regulations 1999

Uponor S-Press PLUS elbow male thread 32-R1"MT

1070537

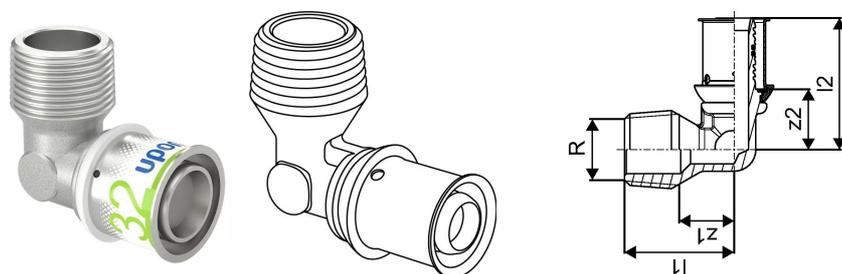

Product code

| | |
|--------------|----------------|
| Item no EAN | 6414905218578 |
| Item no GF | 35001070537 |
| Item no GTIN | 06414905218578 |
| Item no LVI | 1720199 |
| Item no NOBB | 55172085 |
| Item no NRF | 5114465 |
| Item no RSK | 1896540 |
| Item no VVS | 045471382 |

Dimensions

| | |
|------------------|-------|
| Item Unit Height | 63 |
| Item Unit Length | 68 |
| Item Unit Weight | 0,227 |
| Item Unit Width | 39 |
| Item_UOM | pce |

Measurements

| | |
|---------------|------|
| Length (l1) | 43,3 |
| Length (l2) | 51,1 |
| Male_thread_R | 1 |
| z1 | 22 |
| Z2 | 22,7 |

Packaging

| | |
|----------------------|----------------|
| Packaging GTIN PL1 | 06414905279920 |
| Packaging GTIN PL3 | 06414905424269 |
| Packaging GTIN PL4 | 06414905279944 |
| Packaging Height PL1 | 89 |
| Packaging Height PL3 | 95 |
| Packaging Height PL4 | 714 |

| | |
|------------------------|-------------|
| Packaging Length PL1 | 176 |
| Packaging Length PL3 | 277 |
| Packaging Length PL4 | 1200 |
| Packaging Quantity PL1 | 5 |
| Packaging Quantity PL3 | 20 |
| Packaging Quantity PL4 | 1920 |
| Packaging Type PL1 | Base_Box |
| Packaging Type PL3 | Box |
| Packaging Type PL4 | Pallet |
| Packaging Volume PL1 | 0,001049488 |
| Packaging Volume PL3 | 0,004710385 |
| Packaging Volume PL4 | 0,68544 |
| Packaging Weight PL1 | 1,172 |
| Packaging Weight PL3 | 4,888 |
| Packaging Weight PL4 | 488,64 |
| Packaging Width PL1 | 67 |
| Packaging Width PL3 | 179 |
| Packaging Width PL4 | 800 |

Technical documents

Download documents here 

Uponor UK

Blackmor Lane The Pavilion
WD18 8GA, Watford
UK

T +44 (0)1923 927000
E enquiries.uk@uponor.com

www.uponor.com/en-gb