


## Uponor S-Press PLUS reducer 32-25

1070556

- Made of tin-plated DZR brass

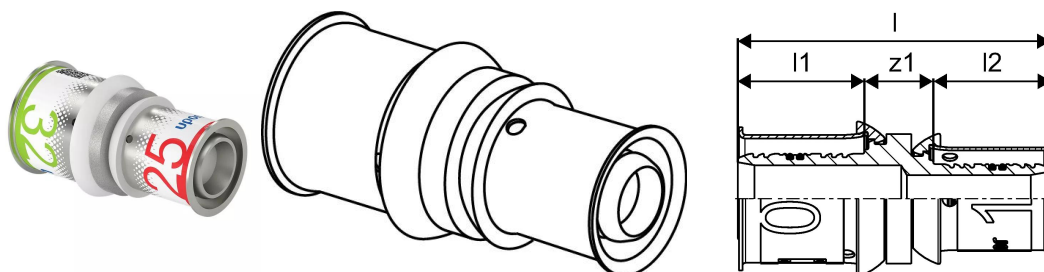

### About Uponor S-Press PLUS reducer

#### Specification

- Unique press indicator foil
- Fast 3-step installation (press without bevel)
- Innovative QR code for immediate digital access
- Colour coded
- Fixed press sleeve with inspection windows
- Precise jaw location
- Fast diameter recognition
- Accurate test safety function
- 100% backward compatible with existing Uponor components
- Flow rate optimized fitting body

#### Application

Tested/approved according to BS EN ISO 21003 Multilayer piping systems for hot and cold water installations inside buildings for application class 1,2,4,5/10bar

Domestic water services: The permanent operating temperature from 20°C to 70°C at a maximum permanent operating pressure of 10 bar. The short-term malfunction temperature is 95°C for a period of 100 hours in the operating life time.

Domestic cold water services : where the water temperature does not exceed 20°C at a maximum permanent operating pressure of 16bar.

Heating: The permanent operating temperature ranges up to 80°C at a maximum permanent operating pressure of 10 bar. The short-term malfunction temperature is 100°C for a period of 100 hours in the operating life time.

#### Certification


UK Reg4 approval

- WRAS or
- KIWA

to meet the requirements of the Water Supply (Water Fittings) Regulations 1999

## Uponor S-Press PLUS reducer 32-25

1070556

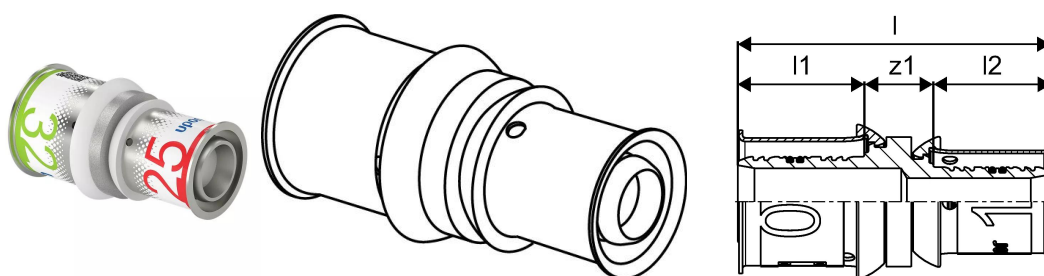

### Product code

Item no EAN	6414905218769
Item no GF	35001070556
Item no GTIN	06414905218769
Item no LVI	1720743
Item no NOBB	55172263
Item no NRF	5114485
Item no RSK	1899436
Item no VVS	045480375

### Dimensions

Item Unit Height	39.3
Item Unit Length	68.2
Item Unit Weight	0,141
Item Unit Width	39.3
Item_UOM	pce

### Measurements

LENGTH_L	68,2
Length (l1)	28,3
Length (l2)	28,3
z1	11,6

### Packaging

Packaging GTIN PL1	06414905635337
Packaging GTIN PL3	06414905635511
Packaging GTIN PL4	06414905499502
Packaging Height PL1	89
Packaging Height PL3	189
Packaging Height PL4	711
Packaging Length PL1	176

Packaging Length PL3	357
Packaging Length PL4	1200
Packaging Quantity PL1	10
Packaging Quantity PL3	80
Packaging Quantity PL4	1920
Packaging Type PL1	Base_Box
Packaging Type PL3	Box
Packaging Type PL4	Pallet
Packaging Volume PL1	0,00211464
Packaging Volume PL3	0,018555075
Packaging Volume PL4	0,68256
Packaging Weight PL1	1,484
Packaging Weight PL3	12,329
Packaging Weight PL4	320,896
Packaging Width PL1	135
Packaging Width PL3	275
Packaging Width PL4	800

## Technical documents

Download documents here 

### Uponor UK

Blackmor Lane The Pavilion  
WD18 8GA, Watford  
UK

T +44 (0)1923 927000  
E enquiries.uk@uponor.com

[www.uponor.com/en-gb](http://www.uponor.com/en-gb)