


## Uponor S-Press PLUS tee reducer 32-16-32

1070580

- Made of tin-plated DZR brass

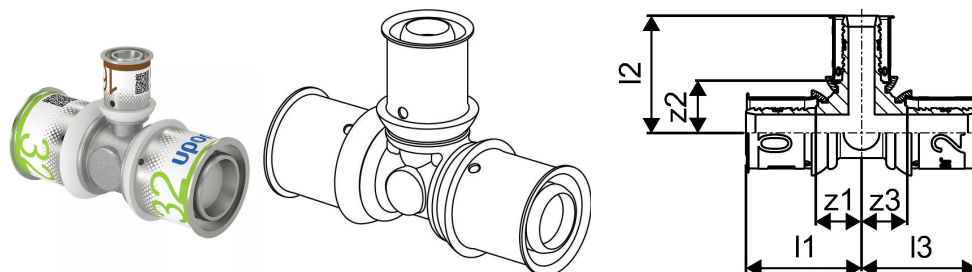

### About Uponor S-Press PLUS tee reducer

#### Specification

- Unique press indicator foil
- Fast 3-step installation (press without bevel)
- Innovative QR code for immediate digital access
- Colour coded
- Fixed press sleeve with inspection windows
- Precise jaw location
- Fast diameter recognition
- Accurate test safety function
- 100% backward compatible with existing Uponor components
- Flow rate optimized fitting body

#### Application

Tested/approved according to BS EN ISO 21003 Multilayer piping systems for hot and cold water installations inside buildings for application class 1,2,4,5/10bar

Domestic water services: The permanent operating temperature from 20°C to 70°C at a maximum permanent operating pressure of 10 bar. The short-term malfunction temperature is 95°C for a period of 100 hours in the operating life time.

Domestic cold water services : where the water temperature does not exceed 20°C at a maximum permanent operating pressure of 16bar.

Heating: The permanent operating temperature ranges up to 80°C at a maximum permanent operating pressure of 10 bar. The short-term malfunction temperature is 100°C for a period of 100 hours in the operating life time.

#### Certification


UK Reg4 approval

- WRAS or
- KIWA

to meet the requirements of the Water Supply (Water Fittings) Regulations 1999

## Uponor S-Press PLUS tee reducer 32-16-32

1070580

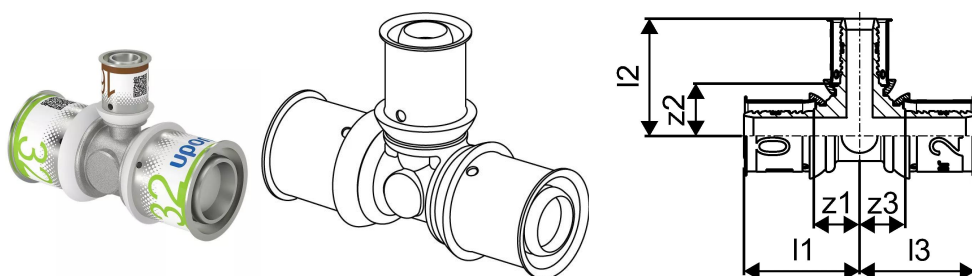

### Product code

|              |                |
|--------------|----------------|
| Item no EAN  | 6414905219001  |
| Item no GF   | 35001070580    |
| Item no GTIN | 06414905219001 |
| Item no LVI  | 1720762        |
| Item no NOBB | 55172456       |
| Item no NRF  | 5114506        |
| Item no RSK  | 1808024        |
| Item no VVS  | 045476365      |

### Dimensions

|                  |       |
|------------------|-------|
| Item Unit Height | 61.3  |
| Item Unit Length | 86.5  |
| Item Unit Weight | 0,225 |
| Item Unit Width  | 39.3  |
| Item_UOM         | pce   |

### Measurements

|             |      |
|-------------|------|
| Length (I1) | 43,4 |
| Length (I2) | 41,8 |
| Length (I3) | 50,3 |
| z1          | 15   |
| Z2          | 22   |
| Z3          | 15   |

### Packaging

|                      |                |
|----------------------|----------------|
| Packaging GTIN PL1   | 06414905423842 |
| Packaging GTIN PL3   | 06414905424627 |
| Packaging GTIN PL4   | 06414905423859 |
| Packaging Height PL1 | 89             |
| Packaging Height PL3 | 188            |

|                        |             |
|------------------------|-------------|
| Packaging Height PL4   | 708         |
| Packaging Length PL1   | 176         |
| Packaging Length PL3   | 277         |
| Packaging Length PL4   | 1200        |
| Packaging Quantity PL1 | 5           |
| Packaging Quantity PL3 | 20          |
| Packaging Quantity PL4 | 960         |
| Packaging Type PL1     | Base_Box    |
| Packaging Type PL3     | Box         |
| Packaging Type PL4     | Pallet      |
| Packaging Volume PL1   | 0,00211464  |
| Packaging Volume PL3   | 0,009321604 |
| Packaging Volume PL4   | 0,67968     |
| Packaging Weight PL1   | 1,164       |
| Packaging Weight PL3   | 4,916       |
| Packaging Weight PL4   | 261,6       |
| Packaging Width PL1    | 135         |
| Packaging Width PL3    | 179         |
| Packaging Width PL4    | 800         |

## Technical documents

Download documents here 

### Uponor UK

Blackmor Lane The Pavilion  
 WD18 8GA, Watford  
 UK

T +44 (0)1923 927000  
 E enquiries.uk@uponor.com

[www.uponor.com/en-gb](http://www.uponor.com/en-gb)