


Uponor S-Press PLUS tee male thread 25-R3/4"MT-25

1070593

- Made of tin-plated DR brass

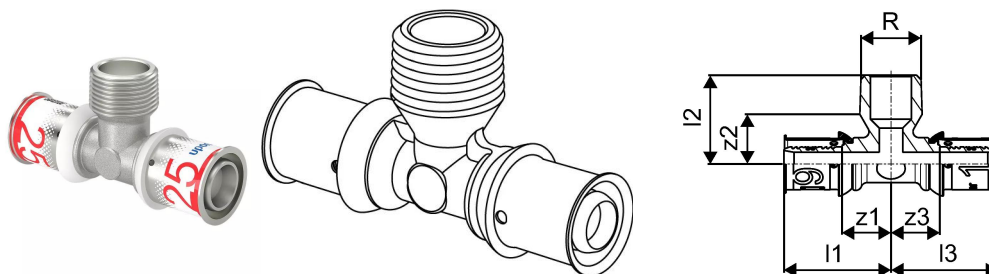

About Uponor S-Press PLUS tee male thread

Specification

- Unique press indicator
- Fast 3-step installation (press without bevel)
- Innovative QR code for immediate digital access
- Colour code
- Fixed press sleeve with inspection window
- Precise jaw fixation
- Fast diameter recognition
- Accurate test safety function
- 100% backward compatible with existing Uponor components
- Flow rate optimized fitting body

Application

- Tap water: The permanent operating temperature ranges from 0°C to 70°C at a maximum permanent operating pressure of 10 bar. The short-term malfunction temperature is 95°C for a period of 100 hours in the operating life time.
- Heating: The permanent operating temperature ranges up to 80°C at a maximum permanent operating pressure of 10 bar. The short-term malfunction temperature is 100°C for a period of 100 hours in the operating life time.

if not different mentioned:


- Male and female threads acc.to EN 10226-1.

Certification

- Approvals by local OM.
- E.g.
- DVGW
- AENOR

Uponor S-Press PLUS tee male thread 25-R3/4"MT-25

1070593

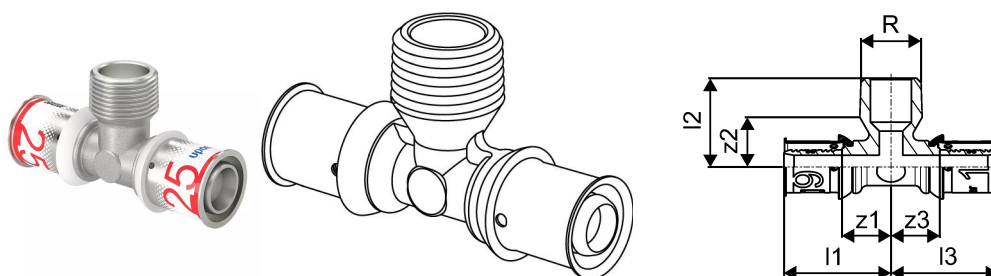

Technical data

Item no VVS	045477310
Item no NRF	5114512
Item (unit of measurement)	pce
Length (l1)	48 mm
Length (l2)	36 mm
Length (l3)	48 mm
z2	21 mm
z3	19 mm
Packaging Quantity PL1	5
Packaging Quantity PL3	20
Packaging Quantity PL4	960

Technical documents

[Download documents here](#)

Uponor UK

Blackmor Lane The Pavilion
WD18 8GA, Watford
UK

T +44 (0)1923 927000
E enquiries.uk@uponor.com

www.uponor.com/en-gb