


Uponor S-Press PLUS tee female thread 32-Rp1/2"FT-32

1070600

- Unique press indicator
- Fast 3-step installation (press without bevel)
- Innovative QR code for immediate digital access

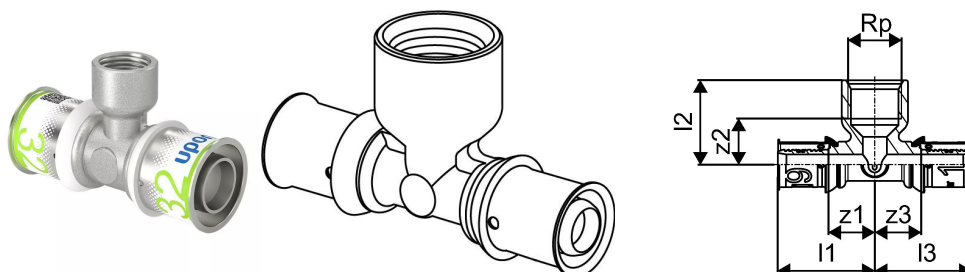

About Uponor S-Press PLUS tee female thread

Specification

- Fixed stainless steel press sleeve with inspection windows
- Precise jaw location
- Unique press indicator
- Easy size identification
- Unpressed leak-path safety feature
- Fast

Application


- Tap water: The permanent operating temperature ranges from 0°C to 70°C at a maximum permanent operating pressure of 10 bar. The short-term malfunction temperature is 95°C for a period of 100 hours in the operating life time.
- Heating: The permanent operating temperature ranges up to 80°C at a maximum permanent operating pressure of 10 bar. The short-term malfunction temperature is 100°C for a period of 100 hours in the operating life time.
- Unless specified otherwise, male and female threads acc.to EN 10226-1.

Certification

- WRAS
- DVGW
- KIWA

Uponor S-Press PLUS tee female thread 32-Rp1/2"FT-32

1070600

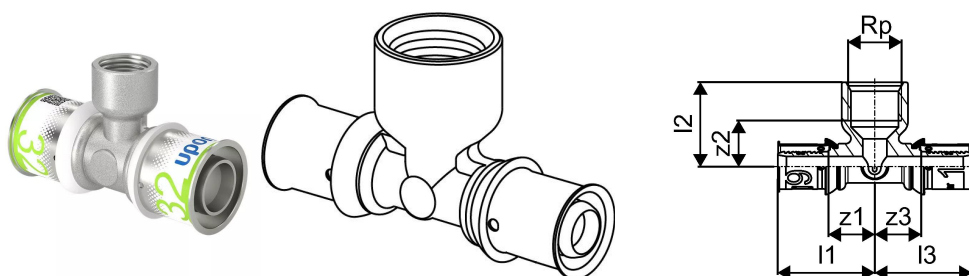

Technical data

Item Quantity 1	5
Item Quantity 2	20
Item (unit of measurement)	pce
Outside diameter	32 mm
Female_thread_Rp	1/2 inch
Length (l1)	47 mm
Length (l2)	40 mm
Length (l3)	47 mm
z1	18 mm
z2	25 mm
z3	18 mm

Technical documents

Download documents here

Uponor UK

Blackmor Lane The Pavilion
WD18 8GA, Watford
UK

T +44 (0)1923 927000
E enquiries.uk@uponor.com

www.uponor.com/en-gb