


Uponor S-PRESS PLUS adapter swivel nut 20-G3/4"SN

1070605

- Made of tin-plated DZR brass
- Demountable swivel nut for connection to on-wall fittings, equipment, filters and valves
- Thread acc. to BS EN ISO 228-1.

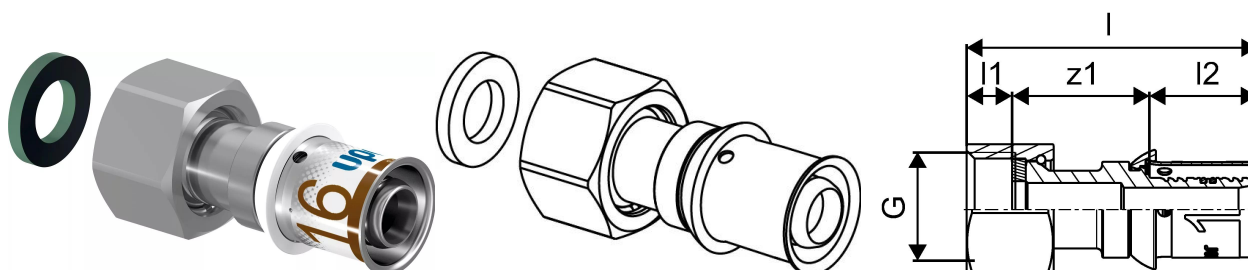

About Uponor S-Press PLUS adapter swivel nut

Specification

- Unique press indicator foil
- Fast 3-step installation (press without bevel)
- Innovative QR code for immediate digital access
- Colour coded
- Fixed press sleeve with inspection windows
- Precise jaw location
- Fast diameter recognition
- Accurate test safety function
- 100% backward compatible with existing Uponor components
- Flow rate optimized fitting body

Application

Tested/approved according to BS EN ISO 21003 Multilayer piping systems for hot and cold water installations inside buildings for application class 1,2,4,5/10bar

Domestic water services: The permanent operating temperature from 20°C to 70°C at a maximum permanent operating pressure of 10 bar. The short-term malfunction temperature is 95°C for a period of 100 hours in the operating life time.

Domestic cold water services : where the water temperature does not exceed 20°C at a maximum permanent operating pressure of 16bar.

Heating: The permanent operating temperature ranges up to 80°C at a maximum permanent operating pressure of 10 bar. The short-term malfunction temperature is 100°C for a period of 100 hours in the operating life time.

Certification

UK Reg4 approval

- WRAS or
- KIWA

to meet the requirements of the Water Supply (Water Fittings) Regulations 1999

Uponor S-PRESS PLUS adapter swivel nut 20-G3/4"SN

1070605



Measurements

Cylindric_thread_G	0,75
LENGTH_L	45,5
Length (l1)	7,5
Length (l2)	21,3
z1	16,7

Product code

Item no EAN	6414905219254
Item no GF	35001070605
Item no GTIN	06414905219254
Item no LVI	1720779
Item no NOBB	55172626
Item no NRF	5114525
Item no RSK	1899454
Item no VVS	045483246

Dimensions

Item Unit Height	34
Item Unit Length	39
Item Unit Weight	0,086
Item Unit Width	30
Item_UOM	pce

Packaging

Packaging GTIN PL1	06414905468683
Packaging GTIN PL2	06414905442775
Packaging GTIN PL4	06414905499618
Packaging Height PL1	35
Packaging Height PL2	89
Packaging Height PL4	678

Packaging Length PL1	50
Packaging Length PL2	176
Packaging Length PL4	1200
Packaging Quantity PL1	1
Packaging Quantity PL2	20
Packaging Quantity PL4	3840
Packaging Type PL1	Plastic_Bag
Packaging Type PL2	Medium_Box
Packaging Type PL4	Pallet
Packaging Volume PL1	0,0000525
Packaging Volume PL2	0,00211464
Packaging Volume PL4	0,65088
Packaging Weight PL1	0,096
Packaging Weight PL2	2,02
Packaging Weight PL4	219,84
Packaging Width PL1	30
Packaging Width PL2	135
Packaging Width PL4	800

Technical documents

Download documents here 

Uponor UK

Blackmor Lane The Pavilion
WD18 8GA, Watford
UK

T +44 (0)1923 927000
E enquiries.uk@uponor.com

www.uponor.com/en-gb