


Uponor S-Press PLUS adapter swivel nut 25-G3/4"SN

1070606

- Made of tin-plated DR brass
- Releasable screw connector for connection to on-wall fittings, filters and shut-off valves
- Thread acc. to EN ISO 228-1.

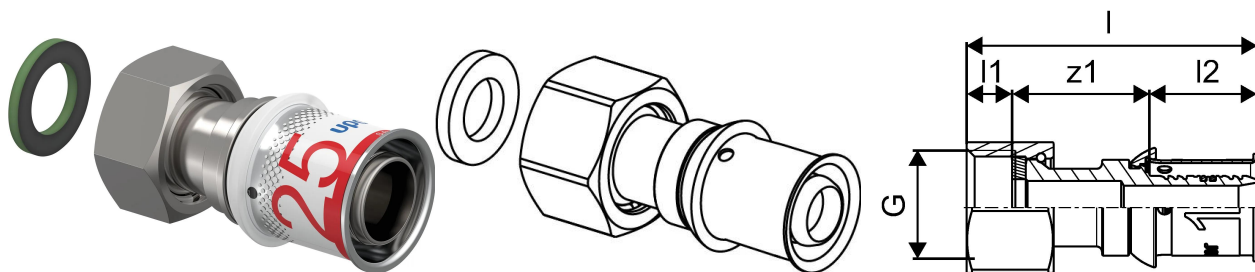

About Uponor S-Press PLUS adapter swivel nut

Specification

- Unique press indicator
- Fast 3-step installation (press without bevel)
- Innovative QR code for immediate digital access
- Colour code
- Fixed press sleeve with inspection window
- Precise jaw fixation
- Fast diameter recognition
- Accurate test safety function
- 100% backward compatible with existing Uponor components
- Flow rate optimized fitting body

Application

-Heating systems (high temperature radiators) - where the water temperature does not continuously exceed 80°C, 10 bar (Conditions to application Class 5 - BS EN ISO 21003-1:2008). The maximum short-term malfunction temperature is 100°C for an accumulative 100 hours over the working life of the system. (Heating systems must be installed with room and water temperature controls in accordance with the current Building Regulations Parts L1 (Energy – Dwellings) and L2 (Energy – Non Dwellings) for England and Wales, or an equivalent national standard for Scotland or Republic of Ireland).

-Cold water domestic services: 0°C to 20°C where the water temperature does not exceed 20°C, 16bar.

-Hot water domestic services: 20°C to 70°C where the water temperature does not continuously exceed 70°C, 10 bar (Conditions to application Class 2 - BS EN ISO 21003-1:2008). The maximum short-term malfunction temperature is 95°C for an accumulative 100 hours over the working life of the system.

-Uponor multilayer pipe can be used for DHW recirculating systems, provided the operating temperatures and pressures do not exceed the maximum conditions detailed under 'Domestic Services'

-Chilled water: -10°C to 10°C, 10 bar. If risk of damage from freezing, a suitable anti-freeze additive must be used. Any additive must be suitable for use with Polyethylene, PPSU, EPDM and CW625N brass if not different mentioned:

- Male and female threads acc.to EN 10226-1.

Certification

-WRAS : 1903901 - Uponor S-Press PLUS, S-Press PLUS, PPSU, MLC and SAC 16-32mm


-2101339 : Manifolds and adapters

-KIWA – UK water Regulation 4

-Manufacturing is in accordance with the international quality standard ISO 9001 and environmental standard ISO 14001.

Uponor S-Press PLUS adapter swivel nut 25-G3/4"SN

1070606

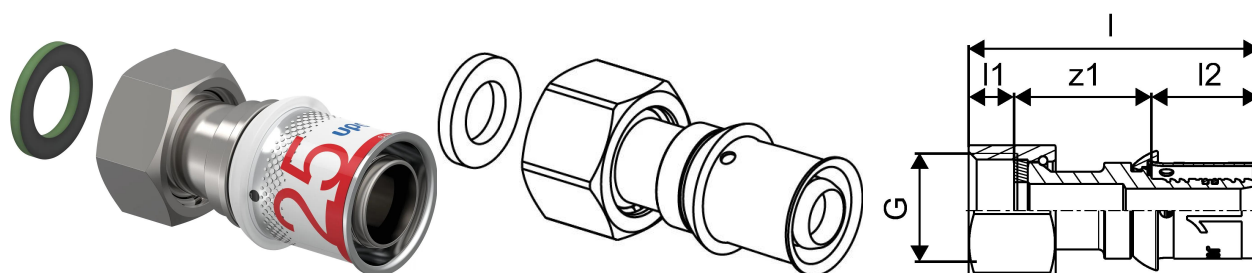

Technical data

| | |
|----------------------------|----------------|
| Item no EAN | 6414905219261 |
| Item no GTIN | 06414905219261 |
| Item no VVS | 045483110 |
| RSK no. | 1899455 |
| Item no NRF | 5114526 |
| Item no LVI | 1720780 |
| Item (unit of measurement) | pce |
| Length (l) | 64 mm |
| Length (l1) | 8 mm |
| Length (l2) | 28 mm |
| Packaging Quantity 1 | 1 |
| Packaging Quantity 4 | 15 |
| Packaging Quantity 4 | 2880 |
| Packaging GTIN PL1 | 06414905468690 |
| Packaging GTIN PL2 | 06414905442782 |
| Packaging GTIN PL4 | 06414905499625 |
| Item Unit Height | 35 mm |
| Item Unit Weight | 0,132 kg |
| Item Unit Width | 32 mm |

Technical documents

Download documents here

Blackmor Lane The Pavilion
WD18 8GA, Watford
UK

T +44 (0)1923 927000
E enquiries.uk@uponor.com

www.uponor.com/en-gb