
Product data sheet



GF Uponor S-Press PLUS adapter swivel nut FT 25-G1 1/4 "SN

1070608

- Made of tin-plated DZR brass
- Demountable swivel nut for connection to on-wall fittings, equipment, filters and valves
- Thread acc. to BS EN ISO 228-1.

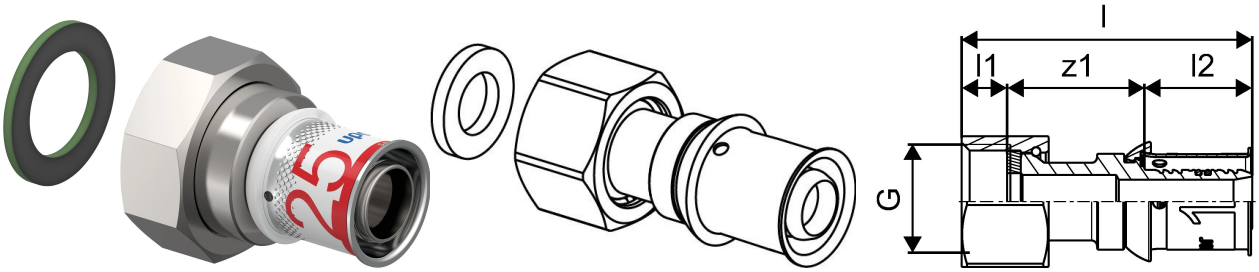

About GF Uponor S-Press PLUS adapter swivel nut

Specification

- Unique press indicator foil
- Fast 3-step installation (press without bevel)
- Innovative QR code for immediate digital access
- Colour coded
- Fixed press sleeve with inspection windows
- Precise jaw location
- Fast diameter recognition
- Accurate test safety function
- 100% backward compatible with existing Uponor components
- Flow rate optimized fitting body

Application

Tested/approved according to BS EN ISO 21003 Multilayer piping systems for hot and cold water installations inside buildings for application class 1,2,4,5/10bar

Domestic water services: The permanent operating temperature from 20°C to 70°C at a maximum permanent operating pressure of 10 bar. The short-term malfunction temperature is 95°C for a period of 100 hours in the operating life time.

Domestic cold water services : where the water temperature does not exceed 20°C at a maximum permanent operating pressure of 16bar.


Heating: The permanent operating temperature ranges up to 80°C at a maximum permanent operating pressure of 10 bar. The short-term malfunction temperature is 100°C for a period of 100 hours in the operating life time.

Certification

UK Reg4 approval
- WRAS or
- KIWA
to meet the requirements of the Water Supply (Water Fittings) Regulations 1999

GF Uponor S-Press PLUS adapter swivel nut FT 25-G1 1/4 "SN

1070608

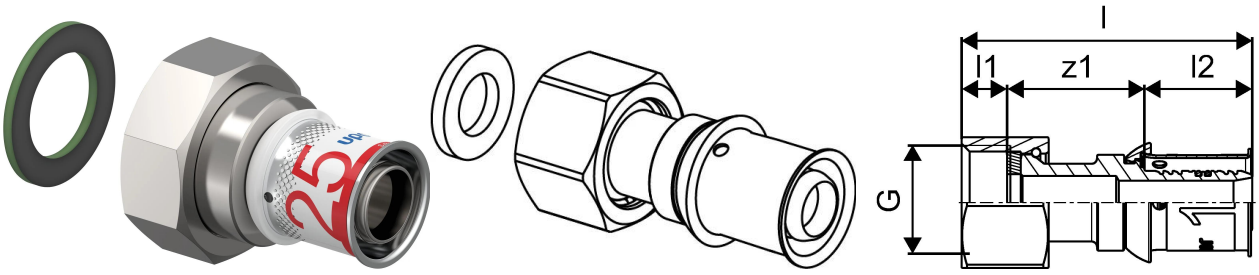

Measurements

Cylindric_thread_G	1 1/4
LENGTH_L	60,4
Length (l1)	10,4
Length (l2)	28,3
z1	21,7

Product code

Item no EAN	6414905219285
Item no GF	35001070608
Item no GTIN	06414905219285
Item no LVI	1720782
Item no NOBB	55172653
Item no NRF	5114528
Item no RSK	1899457
Item no VVS	045483320

Dimensions

Item Unit Height	50
Item Unit Length	47.5
Item Unit Weight	0,224
Item Unit Width	46
Item_UOM	pce

Status

MTO (longer delivery times)	Item available on request, minimum lead time 2 weeks

Packaging

Packaging GTIN PL1	06414905468713
Packaging GTIN PL2	06414905442805

Packaging GTIN PL4	06414905499649
Packaging Height PL1	55
Packaging Height PL2	89
Packaging Height PL4	678
Packaging Length PL1	53
Packaging Length PL2	176
Packaging Length PL4	1200
Packaging Quantity PL1	1
Packaging Quantity PL2	10
Packaging Quantity PL4	1920
Packaging Type PL1	Plastic_Bag
Packaging Type PL2	Medium_Box
Packaging Type PL4	Pallet
Packaging Volume PL1	0,000148665
Packaging Volume PL2	0,00211464
Packaging Volume PL4	0,65088
Packaging Weight PL1	0,225
Packaging Weight PL2	2,279
Packaging Weight PL4	471,36
Packaging Width PL1	51
Packaging Width PL2	135
Packaging Width PL4	800

Technical documents

Download documents here

Excellence in Flow

Visit our webpage to get in contact with your local specialist:
www.georgfischer.com/locations



Uponor UK

Blackmor Lane The Pavillion
WD18 8GA, Watford
UK

T +44 (0)1923 381212
E customerservice.uk.bfs@georgfischer.com

www.uponor.com/en-gb

+GF+