
Product data sheet




GF Uponor S-Press PLUS elbow swivel nut 90° FT 25-G3/4"SN

1070614

- Made of tin-plated DZR brass
- Demountable screw fitting for connection to on-wall fittings, equipment, filters and shut-off valves
- Thread acc. to BS EN ISO 228-1.

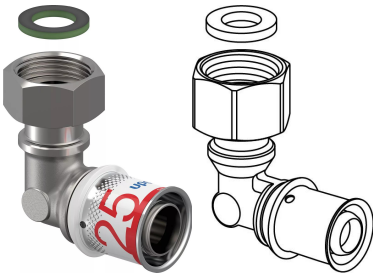



About GF Uponor S-Press PLUS elbow swivel nut 90° FT

Specification

- Unique press indicator foil
- Fast 3-step installation (press without bevel)
- Innovative QR code for immediate digital access
- Colour coded
- Fixed press sleeve with inspection windows
- Precise jaw location
- Fast diameter recognition
- Accurate test safety function
- 100% backward compatible with existing Uponor components
- Flow rate optimized fitting body

Application

Tested/approved according to BS EN ISO 21003 Multilayer piping systems for hot and cold water installations inside buildings for application class 1,2,4,5/10bar

Domestic water services: The permanent operating temperature from 20°C to 70°C at a maximum permanent operating pressure of 10 bar. The short-term malfunction temperature is 95°C for a period of 100 hours in the operating life time.

Domestic cold water services : where the water temperature does not exceed 20°C at a maximum permanent operating pressure of 16bar.


Heating: The permanent operating temperature ranges up to 80°C at a maximum permanent operating pressure of 10 bar. The short-term malfunction temperature is 100°C for a period of 100 hours in the operating life time.


Certification

UK Reg4 approval
- WRAS or
- KIWA
to meet the requirements of the Water Supply (Water Fittings) Regulations 1999

GF Uponor S-Press PLUS elbow swivel nut 90° FT 25-G3/4"SN

1070614

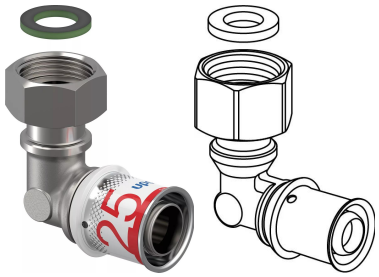



Measurements

Cylindric_thread_G	0,75
Length (l1)	46,9
Length (l2)	47,5
z1	39
Z2	19,2

Product code

Item no EAN	6414905219346
Item no GF	35001070614
Item no GTIN	06414905219346
Item no LVI	1720788
Item no NOBB	55172717
Item no NRF	5114535
Item no RSK	1896571
Item no VVS	045472225

Dimensions

Item Unit Height	54.5
Item Unit Length	64.8
Item Unit Weight	0,168
Item Unit Width	34.6
Item_UOM	pce

Status

MTO (longer delivery times)	Item available on request, minimum lead time 2 weeks

Packaging

Packaging GTIN PL1	06414905427185
Packaging GTIN PL2	06414905427178

Packaging GTIN PL4	06414905427192
Packaging Height PL1	60
Packaging Height PL2	89
Packaging Height PL4	678
Packaging Length PL1	70
Packaging Length PL2	176
Packaging Length PL4	1200
Packaging Quantity PL1	1
Packaging Quantity PL2	10
Packaging Quantity PL4	1920
Packaging Type PL1	Plastic_Bag
Packaging Type PL2	Medium_Box
Packaging Type PL4	Pallet
Packaging Volume PL1	0,000168
Packaging Volume PL2	0,00211464
Packaging Volume PL4	0,65088
Packaging Weight PL1	0,169
Packaging Weight PL2	1,719
Packaging Weight PL4	363,84
Packaging Width PL1	40
Packaging Width PL2	135
Packaging Width PL4	800

Technical documents

Download documents here

Excellence in Flow

Visit our webpage to get in contact with your local specialist:
www.georgfischer.com/locations



Uponor UK

Blackmor Lane The Pavillion
WD18 8GA, Watford
UK

T +44 (0)1923 381212
E customerservice.uk.bfs@georgfischer.com

www.uponor.com/en-gb

+GF+