


Uponor S-Press PLUS elbow swivel nut 25-G3/4"SN

1070614

- Made of tin-plated DZR brass
- Demountable screw fitting for connection to on-wall fittings, equipment, filters and shut-off valves
- Thread acc. to BS EN ISO 228-1.

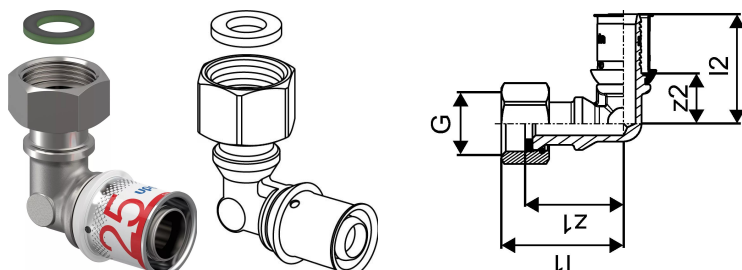

About Uponor S-Press PLUS elbow swivel nut

Specification

- Unique press indicator foil
- Fast 3-step installation (press without bevel)
- Innovative QR code for immediate digital access
- Colour coded
- Fixed press sleeve with inspection windows
- Precise jaw location
- Fast diameter recognition
- Accurate test safety function
- 100% backward compatible with existing Uponor components
- Flow rate optimized fitting body

Application

Tested/approved according to BS EN ISO 21003 Multilayer piping systems for hot and cold water installations inside buildings for application class 1,2,4,5/10bar

Domestic water services: The permanent operating temperature from 20°C to 70°C at a maximum permanent operating pressure of 10 bar. The short-term malfunction temperature is 95°C for a period of 100 hours in the operating life time.

Domestic cold water services : where the water temperature does not exceed 20°C at a maximum permanent operating pressure of 16bar.

Heating: The permanent operating temperature ranges up to 80°C at a maximum permanent operating pressure of 10 bar. The short-term malfunction temperature is 100°C for a period of 100 hours in the operating life time.

Certification


UK Reg4 approval

- WRAS or
- KIWA

to meet the requirements of the Water Supply (Water Fittings) Regulations 1999

Uponor S-Press PLUS elbow swivel nut 25-G3/4"SN

1070614

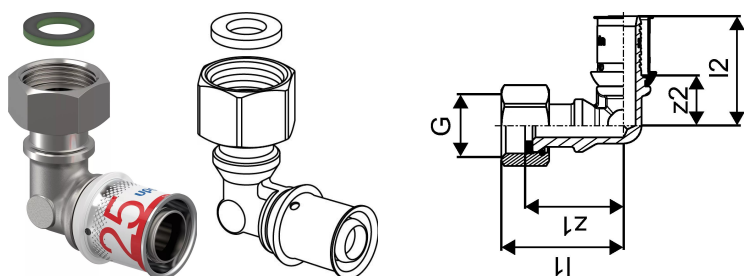

Measurements

| | |
|--------------------|------|
| Cylindric_thread_G | 0,75 |
| Length (l1) | 46,9 |
| Length (l2) | 47,5 |
| z1 | 39 |
| z2 | 19,2 |

Product code

| | |
|--------------|----------------|
| Item no EAN | 6414905219346 |
| Item no GF | 35001070614 |
| Item no GTIN | 06414905219346 |
| Item no LVI | 1720788 |
| Item no NOBB | 55172717 |
| Item no NRF | 5114535 |
| Item no RSK | 1896571 |
| Item no VVS | 045472225 |

Dimensions

| | |
|------------------|-------|
| Item Unit Height | 54.5 |
| Item Unit Length | 64.8 |
| Item Unit Weight | 0,168 |
| Item Unit Width | 34.6 |
| Item_UOM | pce |

Status

MTO (longer delivery times)

Item available on request, minimum lead time 2 weeks

Packaging

| | |
|----------------------|----------------|
| Packaging GTIN PL1 | 06414905427185 |
| Packaging GTIN PL2 | 06414905427178 |
| Packaging GTIN PL4 | 06414905427192 |
| Packaging Height PL1 | 60 |

| | |
|------------------------|-------------|
| Packaging Height PL2 | 89 |
| Packaging Height PL4 | 678 |
| Packaging Length PL1 | 70 |
| Packaging Length PL2 | 176 |
| Packaging Length PL4 | 1200 |
| Packaging Quantity PL1 | 1 |
| Packaging Quantity PL2 | 10 |
| Packaging Quantity PL4 | 1920 |
| Packaging Type PL1 | Plastic_Bag |
| Packaging Type PL2 | Medium_Box |
| Packaging Type PL4 | Pallet |
| Packaging Volume PL1 | 0,000168 |
| Packaging Volume PL2 | 0,00211464 |
| Packaging Volume PL4 | 0,65088 |
| Packaging Weight PL1 | 0,169 |
| Packaging Weight PL2 | 1,719 |
| Packaging Weight PL4 | 363,84 |
| Packaging Width PL1 | 40 |
| Packaging Width PL2 | 135 |
| Packaging Width PL4 | 800 |

Technical documents

Download documents here 

Uponor UK

Blackmor Lane The Pavilion
WD18 8GA, Watford
UK

T +44 (0)1923 927000
E enquiries.uk@uponor.com

www.uponor.com/en-gb