
Product data sheet



GF Uponor S-Press PLUS adapter 25-22CU

1070618

- Adapter with plated copper spigot
- Connection of the plated copper pipe can be made using standard BS EN 1254-2 compression type fitting,
- or a compatible metal press connection.

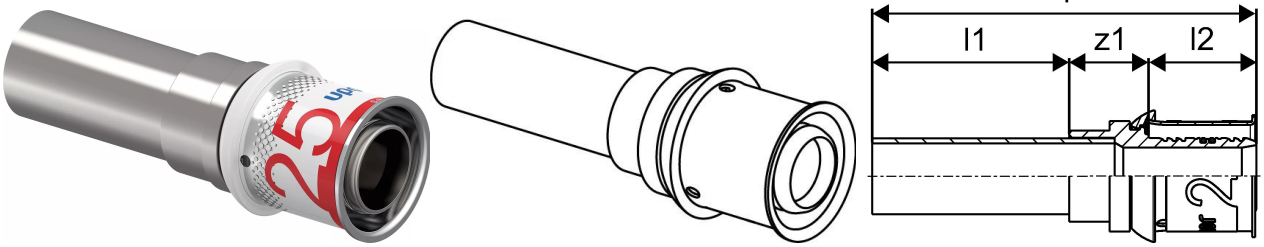

About GF Uponor S-Press PLUS adapter

Specification

- Unique press indicator foil
- Fast 3-step installation (press without bevel)
- Innovative QR code for immediate digital access
- Colour coded
- Fixed press sleeve with inspection windows
- Precise jaw location
- Fast diameter recognition
- Accurate test safety function
- 100% backward compatible with existing Uponor components
- Flow rate optimized fitting body

Application

Tested/approved according to BS EN ISO 21003 Multilayer piping systems for hot and cold water installations inside buildings for application class 1,2,4,5/10bar

Domestic water services: The permanent operating temperature from 20°C to 70°C at a maximum permanent operating pressure of 10 bar. The short-term malfunction temperature is 95°C for a period of 100 hours in the operating life time.

Domestic cold water services : where the water temperature does not exceed 20°C at a maximum permanent operating pressure of 16bar.

Heating: The permanent operating temperature ranges up to 80°C at a maximum permanent operating pressure of 10 bar. The short-term malfunction temperature is 100°C for a period of 100 hours in the operating life time.


Certification

UK Reg4 approval
- WRAS or
- KIWA

to meet the requirements of the Water Supply (Water Fittings) Regulations 1999

GF Uponor S-Press PLUS adapter 25-22CU

1070618

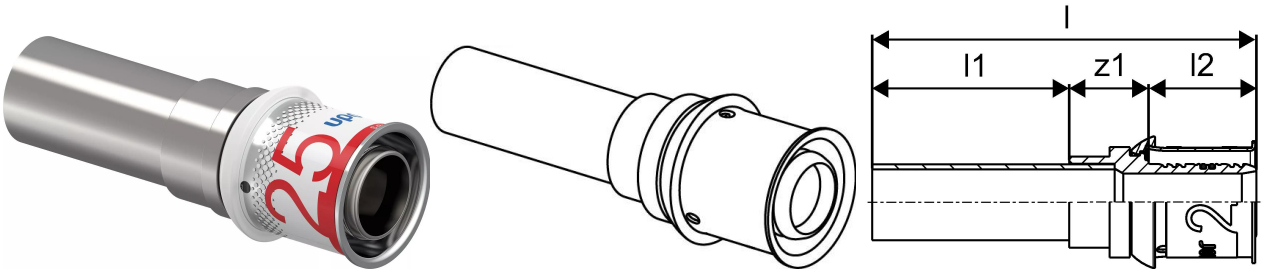

Product code

Item no EAN	6414905219384
Item no GF	35001070618
Item no GTIN	06414905219384
Item no LVI	1720792
Item no NOBB	55172755
Item no NRF	5114539
Item no RSK	1899443
Item no VVS	045313022

Dimensions

Item Unit Height	32.3
Item Unit Length	88
Item Unit Weight	0,1
Item Unit Width	32.3
Item_UOM	pce

Measurements

LENGTH_L	88
Length (l1)	41
Length (l2)	28,3
z1	18,7

Packaging

Packaging GTIN PL1	06414905468782
Packaging GTIN PL3	06414905424795
Packaging GTIN PL4	06414905499717
Packaging Height PL1	89
Packaging Height PL3	95

Packaging Height PL4	714
Packaging Length PL1	176
Packaging Length PL3	277
Packaging Length PL4	1200
Packaging Quantity PL1	5
Packaging Quantity PL3	20
Packaging Quantity PL4	1920
Packaging Type PL1	Base_Box
Packaging Type PL3	Box
Packaging Type PL4	Pallet
Packaging Volume PL1	0,001049488
Packaging Volume PL3	0,004710385
Packaging Volume PL4	0,68544
Packaging Weight PL1	0,537
Packaging Weight PL3	2,348
Packaging Weight PL4	240,96
Packaging Width PL1	67
Packaging Width PL3	179
Packaging Width PL4	800

Technical documents

Download documents here

Excellence in Flow

Visit our webpage to get in contact with your local specialist:
www.georgfischer.com/locations



Uponor UK

Blackmor Lane The Pavillion
WD18 8GA, Watford
UK

T +44 (0)1923 381212
E customerservice.uk.bfs@georgfischer.com

www.uponor.com/en-gb

+GF+