
Product data sheet




GF Uponor S-Press PLUS stop end 25

1070623

- Made of tin-plated DZR brass

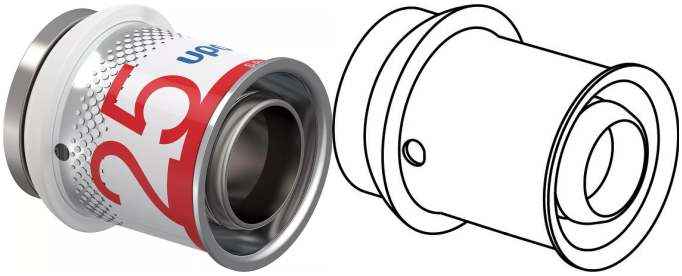



About GF Uponor S-Press PLUS stop end

Specification

- Unique press indicator foil
- Fast 3-step installation (press without bevel)
- Innovative QR code for immediate digital access
- Colour coded
- Fixed press sleeve with inspection windows
- Precise jaw location
- Fast diameter recognition
- Accurate test safety function
- 100% backward compatible with existing Uponor components
- Flow rate optimized fitting body

Application

Tested/approved according to BS EN ISO 21003 Multilayer piping systems for hot and cold water installations inside buildings for application class 1,2,4,5/10bar

Domestic water services: The permanent operating temperature from 20°C to 70°C at a maximum permanent operating pressure of 10 bar. The short-term malfunction temperature is 95°C for a period of 100 hours in the operating life time.

Domestic cold water services : where the water temperature does not exceed 20°C at a maximum permanent operating pressure of 16bar.


Heating: The permanent operating temperature ranges up to 80°C at a maximum permanent operating pressure of 10 bar. The short-term malfunction temperature is 100°C for a period of 100 hours in the operating life time.


Certification

UK Reg4 approval
- WRAS or
- KIWA
to meet the requirements of the Water Supply (Water Fittings) Regulations 1999

GF Uponor S-Press PLUS stop end 25

1070623

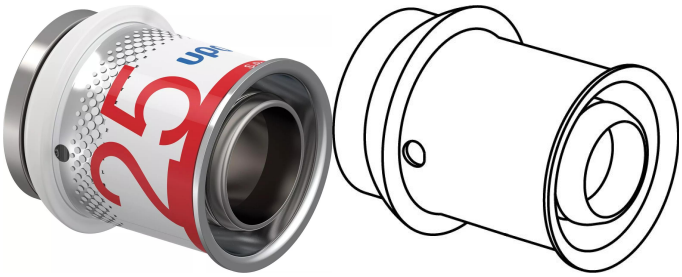



Product code

Item no EAN	6414905219438
Item no GF	35001070623
Item no GTIN	06414905219438
Item no LVI	1720797
Item no NOBB	55171404
Item no NRF	5114545
Item no RSK	1899448
Item no VVS	045313925

Dimensions

Item Unit Height	32.3
Item Unit Length	35
Item Unit Weight	0,068
Item Unit Width	32.3
Item_UOM	pce

Measurements

LENGTH_L	35
Length (l1)	6,7
Length (l2)	28,3

Packaging

Packaging GTIN PL1	06414905468836
Packaging GTIN PL4	06414905499762
Packaging Height PL1	89
Packaging Height PL4	678
Packaging Length PL1	176
Packaging Length PL4	1200

Packaging Quantity PL1	10
Packaging Quantity PL4	3840
Packaging Type PL1	Base_Box
Packaging Type PL4	Pallet
Packaging Volume PL1	0,001049488
Packaging Volume PL4	0,65088
Packaging Weight PL1	0,717
Packaging Weight PL4	300,48
Packaging Width PL1	67
Packaging Width PL4	800

Technical documents

Download documents here

Excellence in Flow

Visit our webpage to get in contact with your local specialist:
www.georgfischer.com/locations



Uponor UK

Blackmor Lane The Pavillion
WD18 8GA, Watford
UK

T +44 (0)1923 381212
E customerservice.uk.bfs@georgfischer.com

www.uponor.com/en-gb

+GF+