


## Uponor S-Press PLUS U-tap elbow 25-Rp1/2"FT-20

**1070634**

- For use in hygienic serial or loop installations
- Made of tin-plated DZR Brass
- For on wall installation or attachment with rotation protection to the Uponor Smart Aqua mounting angles and plates.

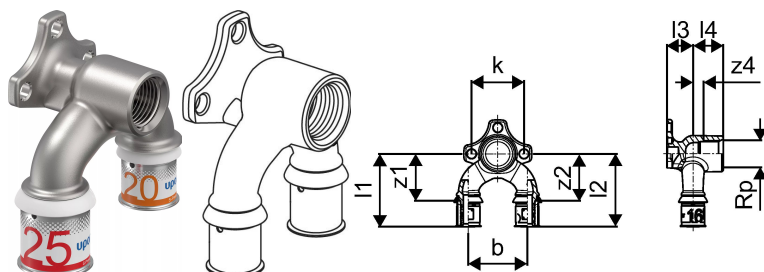

### About Uponor S-Press PLUS U-tap elbow

#### Specification

- Unique press indicator foil
- Fast 3-step installation (press without bevel)
- Innovative QR code for immediate digital access
- Colour coded
- Fixed press sleeve with inspection windows
- Precise jaw location
- Fast diameter recognition
- Accurate test safety function
- 100% backward compatible with existing Uponor components
- Flow rate optimized fitting body

#### Application

Tested/approved according to BS EN ISO 21003 Multilayer piping systems for hot and cold water installations inside buildings for application class 1,2,4,5/10bar

Domestic water services: The permanent operating temperature from 20°C to 70°C at a maximum permanent operating pressure of 10 bar. The short-term malfunction temperature is 95°C for a period of 100 hours in the operating life time.

Domestic cold water services : where the water temperature does not exceed 20°C at a maximum permanent operating pressure of 16bar.

Heating: The permanent operating temperature ranges up to 80°C at a maximum permanent operating pressure of 10 bar. The short-term malfunction temperature is 100°C for a period of 100 hours in the operating life time.

#### Certification


UK Reg4 approval

- WRAS or
- KIWA

to meet the requirements of the Water Supply (Water Fittings) Regulations 1999

## Uponor S-Press PLUS U-tap elbow 25-Rp1/2"FT-20

1070634

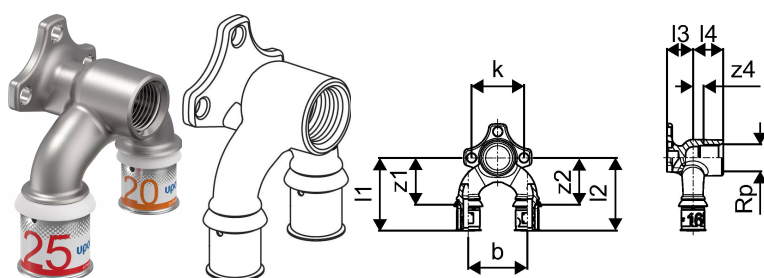

### Measurements

Female thread Rp	1/2
Length (l1)	64
Length (l2)	57
Length (l3)	27
Z Measurement b	60
Z Measurement k	40
z1	35,7
Z2	35,7
Z4	9

### Product code

Item no EAN	6414905219506
Item no GF	35001070634
Item no GTIN	06414905219506

### Dimensions

Item Unit Height	51
Item Unit Length	90
Item Unit Weight	0,337
Item Unit Width	89.5
Item_UOM	pce

### Packaging

Packaging GTIN PL1	06414905468904
Packaging GTIN PL4	06414905499830
Packaging Height PL1	89
Packaging Height PL4	678
Packaging Length PL1	176
Packaging Length PL4	1200
Packaging Quantity PL1	3

Packaging Quantity PL4	576
Packaging Type PL1	Base_Box
Packaging Type PL4	Pallet
Packaging Volume PL1	0,00211464
Packaging Volume PL4	0,65088
Packaging Weight PL1	1,091
Packaging Weight PL4	233,472
Packaging Width PL1	135
Packaging Width PL4	800

## Technical documents

Download documents here 

### Uponor UK

Blackmor Lane The Pavilion  
WD18 8GA, Watford  
UK

T +44 (0)1923 927000  
E [enquiries.uk@uponor.com](mailto:enquiries.uk@uponor.com)

[www.uponor.com/en-gb](http://www.uponor.com/en-gb)