


Uponor S-Press PLUS U-tap elbow mixer 16-16-R1/2"MT

1070636

- Fixed stainless steel sleeve
- for inwall mixer and flushing tank connection in serial and loop installation.

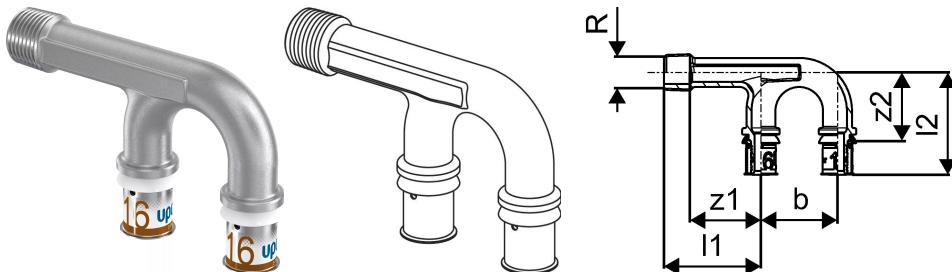

About Uponor S-Press PLUS U-tap elbow mixer

Specification

- Unique press indicator
- Fast 3-step installation (press without bevel)
- Innovative QR code for immediate digital access
- Colour code
- Fixed press sleeve with inspection window
- Precise jaw fixation
- Fast diameter recognition
- Accurate test safety function
- 100% backward compatible with existing Uponor components
- Flow rate optimized fitting body

Application

- Heating systems (high temperature radiators) - where the water temperature does not continuously exceed 80°C, 10 bar (Conditions to application Class 5 - BS EN ISO 21003-1:2008). The maximum short-term malfunction temperature is 100°C for an accumulative 100 hours over the working life of the system. (Heating systems must be installed with room and water temperature controls in accordance with the current Building Regulations Parts L1 (Energy – Dwellings) and L2 (Energy – Non Dwellings) for England and Wales, or an equivalent national standard for Scotland or Republic of Ireland).

- Cold water domestic services: 0°C to 20°C where the water temperature does not exceed 20°C, 16bar.

- Hot water domestic services: 20°C to 70°C where the water temperature does not continuously exceed 70°C, 10 bar (Conditions to application Class 2 - BS EN ISO 21003-1:2008). The maximum short-term malfunction temperature is 95°C for an accumulative 100 hours over the working life of the system.

- Uponor multilayer pipe can be used for DHW recirculating systems, provided the operating temperatures and pressures do not exceed the maximum conditions detailed under 'Domestic Services'

- Chilled water: -10°C to 10°C, 10 bar. If risk of damage from freezing, a suitable anti-freeze additive must be used. Any additive must be suitable for use with Polyethylene, PPSU, EPDM and CW625N brass if not different mentioned:

- Male and female threads acc.to EN 10226-1.

Certification

- WRAS : 1903901 - Uponor S-Press PLUS, S-Press PLUS, PPSU, MLC and SAC 16-32mm


- 2101339 : Manifolds and adapters

- KIWA – UK water Regulation 4

- Manufacturing is in accordance with the international quality standard ISO 9001 and environmental standard ISO 14001.

Uponor S-Press PLUS U-tap elbow mixer 16-16-R1/2"MT

1070636

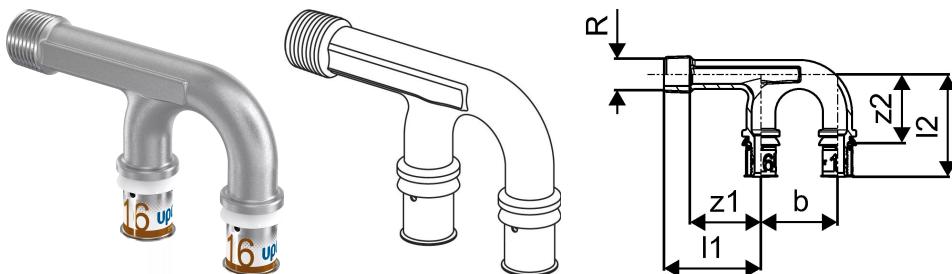

Product code

Item no EAN 6414905219520

Item no GF 35001070636

Item no GTIN 06414905219520

Dimensions

Item Unit Height 22

Item Unit Length 113

Item Unit Weight 0,237

Item Unit Width 70,7

Item_UOM pce

Measurements

Length (l1) 57

Length (l2) 60

Male_thread_R 1/2

Z Measurement b 45

z1 41,5

Z2 40,2

Status

MTO (longer delivery times) Item available on request, minimum lead time 2 weeks

Packaging

Packaging GTIN PL1 06414905468928

Packaging GTIN PL4 06414905499854

Packaging Height PL1 89

Packaging Height PL4 678

Packaging Length PL1 176

Packaging Length PL4 1200

Packaging Quantity PL1 5

Packaging Quantity PL4 960

Packaging Type PL1	Base_Box
Packaging Type PL4	Pallet
Packaging Volume PL1	0,00211464
Packaging Volume PL4	0,65088
Packaging Weight PL1	1,265
Packaging Weight PL4	266,88
Packaging Width PL1	135
Packaging Width PL4	800

Technical documents

Download documents here 

Uponor UK

Blackmor Lane The Pavilion
WD18 8GA, Watford
UK

T +44 (0)1923 927000
E enquiries.uk@uponor.com

www.uponor.com/en-gb