


## Uponor S-Press PLUS U-tap elbow mixer 16-16-R1/2"MT

**1070636**

- Made of tin-plated DZR brass
- For in-wall mixer, or flushing tank connections in hygienic serial and loop installations.

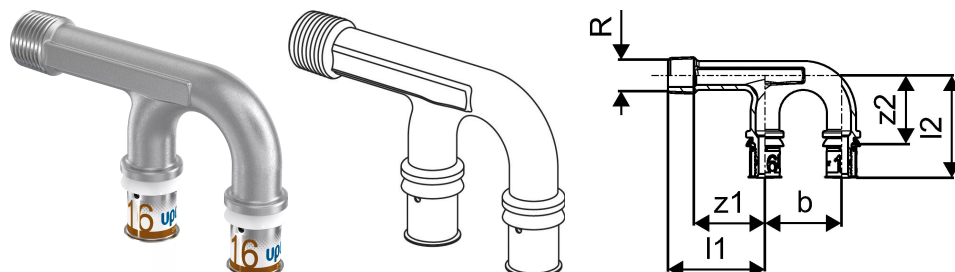

### About Uponor S-Press PLUS U-tap elbow mixer

#### Specification

- Unique press indicator foil
- Fast 3-step installation (press without bevel)
- Innovative QR code for immediate digital access
- Colour coded
- Fixed press sleeve with inspection windows
- Precise jaw location
- Fast diameter recognition
- Accurate test safety function
- 100% backward compatible with existing Uponor components
- Flow rate optimized fitting body

#### Application

Tested/approved according to BS EN ISO 21003 Multilayer piping systems for hot and cold water installations inside buildings for application class 1,2,4,5/10bar

Domestic water services: The permanent operating temperature from 20°C to 70°C at a maximum permanent operating pressure of 10 bar. The short-term malfunction temperature is 95°C for a period of 100 hours in the operating life time.

Domestic cold water services : where the water temperature does not exceed 20°C at a maximum permanent operating pressure of 16bar.

Heating: The permanent operating temperature ranges up to 80°C at a maximum permanent operating pressure of 10 bar. The short-term malfunction temperature is 100°C for a period of 100 hours in the operating life time.

#### Certification


UK Reg4 approval

- WRAS or
- KIWA

to meet the requirements of the Water Supply (Water Fittings) Regulations 1999

## Uponor S-Press PLUS U-tap elbow mixer 16-16-R1/2"MT

1070636

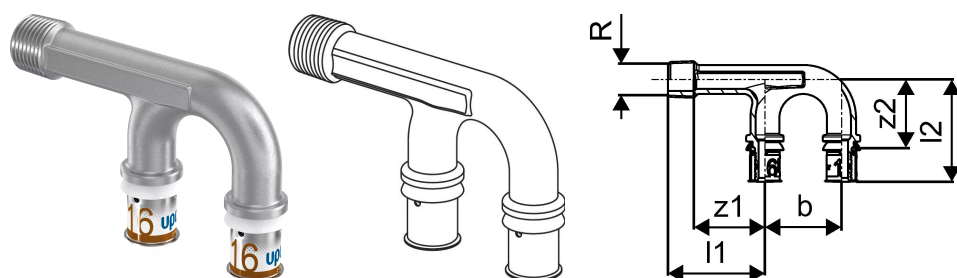

### Product code

Item no EAN	6414905219520
Item no GF	35001070636
Item no GTIN	06414905219520

### Dimensions

Item Unit Height	22
Item Unit Length	113
Item Unit Weight	0,237
Item Unit Width	70.7
Item_UOM	pce

### Measurements

Length (l1)	57
Length (l2)	60
Male_thread_R	1/2
Z Measurement b	45
z1	41,5
Z2	40,2

### Status

MTO (longer delivery times) Item available on request, minimum lead time 2 weeks

### Packaging

Packaging GTIN PL1	06414905468928
Packaging GTIN PL4	06414905499854
Packaging Height PL1	89
Packaging Height PL4	678
Packaging Length PL1	176
Packaging Length PL4	1200
Packaging Quantity PL1	5
Packaging Quantity PL4	960

Packaging Type PL1	Base_Box
Packaging Type PL4	Pallet
Packaging Volume PL1	0,00211464
Packaging Volume PL4	0,65088
Packaging Weight PL1	1,265
Packaging Weight PL4	266,88
Packaging Width PL1	135
Packaging Width PL4	800

## Technical documents

Download documents here 

### Uponor UK

Blackmor Lane The Pavilion  
WD18 8GA, Watford  
UK

T +44 (0)1923 927000  
E [enquiries.uk@uponor.com](mailto:enquiries.uk@uponor.com)

[www.uponor.com/en-gb](http://www.uponor.com/en-gb)