


## Uponor S-Press PLUS U-tap elbow mixer 20-20-R3/4"MT

### 1070637

- Fixed stainless steel sleeve
- for inwall mixer and flushing tank connection in serial and loop installation.

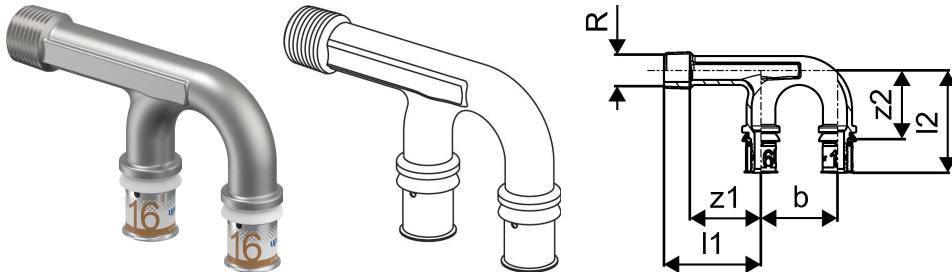

## About Uponor S-Press PLUS U-tap elbow mixer

### Specification

- Unique press indicator
- Fast 3-step installation (press without bevel)
- Innovative QR code for immediate digital access
- Colour code
- Fixed press sleeve with inspection window
- Precise jaw fixation
- Fast diameter recognition
- Accurate test safety function
- 100% backward compatible with existing Uponor components
- Flow rate optimized fitting body

### Application

- Heating systems (high temperature radiators) - where the water temperature does not continuously exceed 80°C, 10 bar (Conditions to application Class 5 - BS EN ISO 21003-1:2008). The maximum short-term malfunction temperature is 100°C for an accumulative 100 hours over the working life of the system. (Heating systems must be installed with room and water temperature controls in accordance with the current Building Regulations Parts L1 (Energy – Dwellings) and L2 (Energy – Non Dwellings) for England and Wales, or an equivalent national standard for Scotland or Republic of Ireland).

- Cold water domestic services: 0°C to 20°C where the water temperature does not exceed 20°C, 16bar.

- Hot water domestic services: 20°C to 70°C where the water temperature does not continuously exceed 70°C, 10 bar (Conditions to application Class 2 - BS EN ISO 21003-1:2008). The maximum short-term malfunction temperature is 95°C for an accumulative 100 hours over the working life of the system.

- Uponor multilayer pipe can be used for DHW recirculating systems, provided the operating temperatures and pressures do not exceed the maximum conditions detailed under 'Domestic Services'

- Chilled water: -10°C to 10°C, 10 bar. If risk of damage from freezing, a suitable anti-freeze additive must be used. Any additive must be suitable for use with Polyethylene, PPSU, EPDM and CW625N brass if not different mentioned:

- Male and female threads acc.to EN 10226-1.

### Certification

- WRAS : 1903901 - Uponor S-Press PLUS, S-Press PLUS, PPSU, MLC and SAC 16-32mm


- 2101339 : Manifolds and adapters

- KIWA – UK water Regulation 4

- Manufacturing is in accordance with the international quality standard ISO 9001 and environmental standard ISO 14001.

## Uponor S-Press PLUS U-tap elbow mixer 20-20-R3/4"MT

1070637

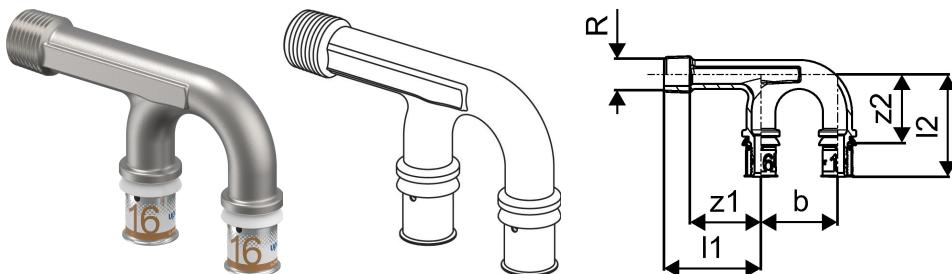

### Product code

Item no EAN 6414905219537

Item no GF 35001070637

Item no GTIN 06414905219537

### Dimensions

Item Unit Height 26.7

Item Unit Length 118.9

Item Unit Weight 0,281

Item Unit Width 74.9

Item\_UOM pce

### Measurements

Length (l1) 61

Length (l2) 61,5

Male\_thread\_R 3/4

Z Measurement b 45

z1 41,5

Z2 40,2

### Status

MTO (longer delivery times) Item available on request, minimum lead time 2 weeks

### Packaging

Packaging GTIN PL1 06414905468935

Packaging GTIN PL4 06414905499861

Packaging Height PL1 89

Packaging Height PL4 678

Packaging Length PL1 176

Packaging Length PL4 1200

Packaging Quantity PL1 5

Packaging Quantity PL4 960

Packaging Type PL1	Base_Box
Packaging Type PL4	Pallet
Packaging Volume PL1	0,00211464
Packaging Volume PL4	0,65088
Packaging Weight PL1	1,485
Packaging Weight PL4	309,12
Packaging Width PL1	135
Packaging Width PL4	800

## Technical documents

Download documents here 

### Uponor UK

Blackmor Lane The Pavilion  
WD18 8GA, Watford  
UK

T +44 (0)1923 927000  
E [enquiries.uk@uponor.com](mailto:enquiries.uk@uponor.com)

[www.uponor.com/en-gb](http://www.uponor.com/en-gb)