


Uponor S-Press PLUS tap elbow M 16-Rp3/8"FT

1070638

- Made of tin-plated DR brass
- for on wall installation or attachment with rotation protection to the Uponor Smart Aqua mounting angles and plates.

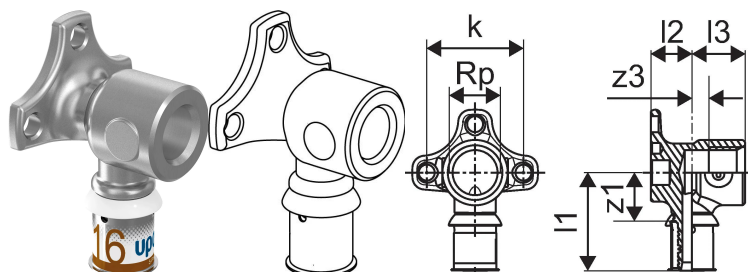

About Uponor S-Press PLUS tap elbow M

Specification

- Unique press indicator
- Fast 3-step installation (press without bevel)
- Innovative QR code for immediate digital access
- Colour code
- Fixed press sleeve with inspection window
- Precise jaw fixation
- Fast diameter recognition
- Accurate test safety function
- 100% backward compatible with existing Uponor components
- Flow rate optimized fitting body

Application

-Heating systems (high temperature radiators) - where the water temperature does not continuously exceed 80°C, 10 bar (Conditions to application Class 5 - BS EN ISO 21003-1:2008). The maximum short-term malfunction temperature is 100°C for an accumulative 100 hours over the working life of the system. (Heating systems must be installed with room and water temperature controls in accordance with the current Building Regulations Parts L1 (Energy – Dwellings) and L2 (Energy – Non Dwellings) for England and Wales, or an equivalent national standard for Scotland or Republic of Ireland).

-Cold water domestic services: 0°C to 20°C where the water temperature does not exceed 20°C, 16bar.

-Hot water domestic services: 20°C to 70°C where the water temperature does not continuously exceed 70°C, 10 bar (Conditions to application Class 2 - BS EN ISO 21003-1:2008). The maximum short-term malfunction temperature is 95°C for an accumulative 100 hours over the working life of the system.

-Uponor multilayer pipe can be used for DHW recirculating systems, provided the operating temperatures and pressures do not exceed the maximum conditions detailed under 'Domestic Services'

-Chilled water: -10°C to 10°C, 10 bar. If risk of damage from freezing, a suitable anti-freeze additive must be used. Any additive must be suitable for use with Polyethylene, PPSU, EPDM and CW625N brass if not different mentioned:

- Male and female threads acc.to EN 10226-1.

Certification

-WRAS : 1903901 - Uponor S-Press PLUS, S-Press PLUS, PPSU, MLC and SAC 16-32mm


-2101339 : Manifolds and adapters

-KIWA – UK water Regulation 4

-Manufacturing is in accordance with the international quality standard ISO 9001 and environmental standard ISO 14001.

Uponor S-Press PLUS tap elbow M 16-Rp3/8"FT

1070638

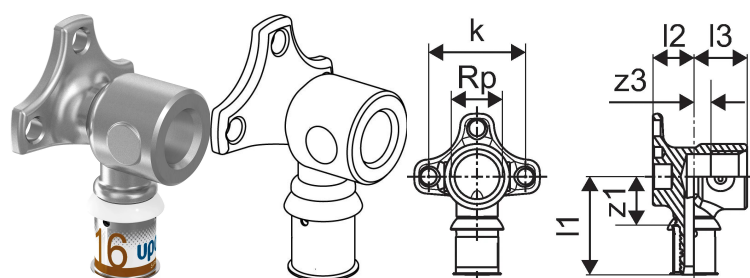

Measurements

Female thread Rp	3/8
Length (l1)	40,5
Length (l2)	17
Length (l3)	22
Z Measurement k	40
z1	20,7
Z3	10,5

Product code

Item no EAN	6414905219544
Item no GF	35001070638
Item no GTIN	06414905219544
Item no NOBB	55172785
Item no NRF	5114547
Item no RSK	1896549

Dimensions

Item Unit Height	40
Item Unit Length	71
Item Unit Weight	0,16
Item Unit Width	51
Item_UOM	pce

Status

MTO (longer delivery times)

Item available on request, minimum lead time 2 weeks

Packaging

Packaging GTIN PL1	06414905289226
Packaging GTIN PL3	06414905424825
Packaging GTIN PL4	06414905289240
Packaging Height PL1	89

Packaging Height PL3	188
Packaging Height PL4	708
Packaging Length PL1	176
Packaging Length PL3	277
Packaging Length PL4	1200
Packaging Quantity PL1	10
Packaging Quantity PL3	40
Packaging Quantity PL4	1920
Packaging Type PL1	Base_Box
Packaging Type PL3	Box
Packaging Type PL4	Pallet
Packaging Volume PL1	0,00211464
Packaging Volume PL3	0,009321604
Packaging Volume PL4	0,67968
Packaging Weight PL1	1,7
Packaging Weight PL3	6,336
Packaging Weight PL4	329,76
Packaging Width PL1	135
Packaging Width PL3	179
Packaging Width PL4	800

Technical documents

Download documents here 

Uponor UK

Blackmor Lane The Pavilion
WD18 8GA, Watford
UK

T +44 (0)1923 927000
E enquiries.uk@uponor.com

www.uponor.com/en-gb