


Uponor S-Press PLUS tap elbow valve box 16-Rp3/4"FT

1070643

- Made of tin-plated DZR brass
- For on wall installation with valve and cover box

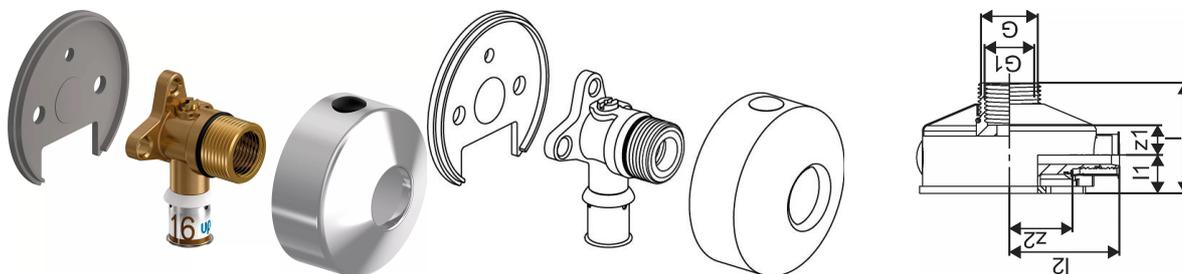

About Uponor S-Press PLUS tap elbow valve box

Specification

- Unique press indicator foil
- Fast 3-step installation (press without bevel)
- Innovative QR code for immediate digital access
- Colour coded
- Fixed press sleeve with inspection windows
- Precise jaw location
- Fast diameter recognition
- Accurate test safety function
- 100% backward compatible with existing Uponor components
- Flow rate optimized fitting body

Application

Tested/approved according to BS EN ISO 21003 Multilayer piping systems for hot and cold water installations inside buildings for application class 1,2,4,5/10bar

Domestic water services: The permanent operating temperature from 20°C to 70°C at a maximum permanent operating pressure of 10 bar. The short-term malfunction temperature is 95°C for a period of 100 hours in the operating life time.

Domestic cold water services : where the water temperature does not exceed 20°C at a maximum permanent operating pressure of 16bar.

Heating: The permanent operating temperature ranges up to 80°C at a maximum permanent operating pressure of 10 bar. The short-term malfunction temperature is 100°C for a period of 100 hours in the operating life time.

Certification


UK Reg4 approval

- WRAS or
- KIWA

to meet the requirements of the Water Supply (Water Fittings) Regulations 1999

Uponor S-Press PLUS tap elbow valve box 16-Rp3/4"FT

1070643

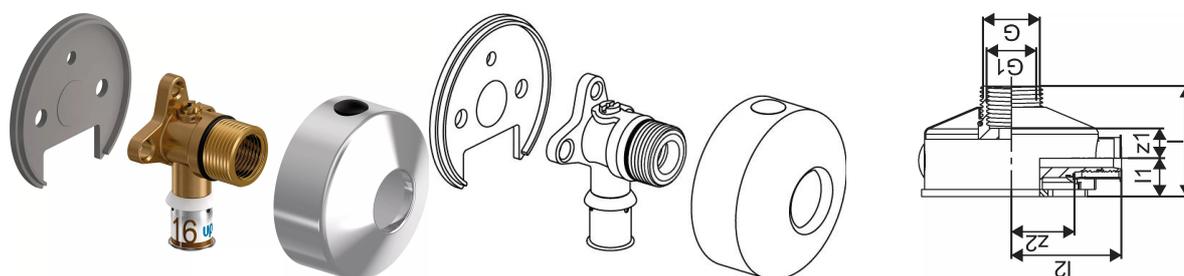

Measurements

Female thread Rp2	1/2"
LENGTH_L	47
Length (l1)	30,7
Length (l2)	46,5
Male thread R2	3/4"
z1	21,7
Z2	26,7

Product code

Item no EAN	6414905219599
Item no GF	35001070643
Item no GTIN	06414905219599
Item no LVI	1720807
Item no VVS	045475516

Dimensions

Item Unit Height	77
Item Unit Length	49
Item Unit Weight	0,238
Item Unit Width	84
Item_UOM	pce

Technical data

Recycling Text Block PL1	Low density polyethylene
Recycling Text Block PL2	Paper

Packaging

Packaging GTIN PL1	06414905468942
Packaging GTIN PL2	06414900326551
Packaging Height PL1	82
Packaging Height PL2	170

Packaging Length PL1	54
Packaging Length PL2	300
Packaging Material (number) PL1	4
Packaging Material (number) PL2	22
Packaging Material PL1	Low density polyethylene
Packaging Material PL2	Paper
Packaging Material (short) PL1	LDPE
Packaging Material (short) PL2	PAP
Packaging Quantity PL1	1
Packaging Quantity PL2	12
Packaging Type PL1	Plastic_Bag
Packaging Type PL2	Medium_Box
Packaging Volume PL1	0,000394092
Packaging Volume PL2	0,009945
Packaging Weight PL1	0,239
Packaging Weight PL2	2,918
Packaging Width PL1	89
Packaging Width PL2	195

Technical documents

Download documents here 

Uponor UK

Blackmor Lane The Pavilion
WD18 8GA, Watford
UK

T +44 (0)1923 927000
E enquiries.uk@uponor.com

www.uponor.com/en-gb