


## Uponor S-Press PLUS tap elbow XL 16-Rp1/2"FT

**1070646**

- Made of tin-plated DZR brass
- Extra long length
- For on wall installation or attachment with rotation protection to the Uponor Smart Aqua mounting angles and plates.

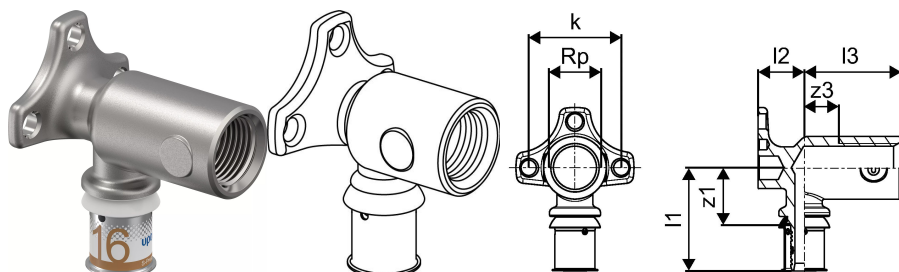

### About Uponor S-Press PLUS tap elbow XL

#### Specification

- Unique press indicator foil
- Fast 3-step installation (press without bevel)
- Innovative QR code for immediate digital access
- Colour coded
- Fixed press sleeve with inspection windows
- Precise jaw location
- Fast diameter recognition
- Accurate test safety function
- 100% backward compatible with existing Uponor components
- Flow rate optimized fitting body

#### Application

Tested/approved according to BS EN ISO 21003 Multilayer piping systems for hot and cold water installations inside buildings for application class 1,2,4,5/10bar

Domestic water services: The permanent operating temperature from 20°C to 70°C at a maximum permanent operating pressure of 10 bar. The short-term malfunction temperature is 95°C for a period of 100 hours in the operating life time.

Domestic cold water services : where the water temperature does not exceed 20°C at a maximum permanent operating pressure of 16bar.

Heating: The permanent operating temperature ranges up to 80°C at a maximum permanent operating pressure of 10 bar. The short-term malfunction temperature is 100°C for a period of 100 hours in the operating life time.

#### Certification


UK Reg4 approval

- WRAS or
- KIWA

to meet the requirements of the Water Supply (Water Fittings) Regulations 1999

## Uponor S-Press PLUS tap elbow XL 16-Rp1/2"FT

1070646

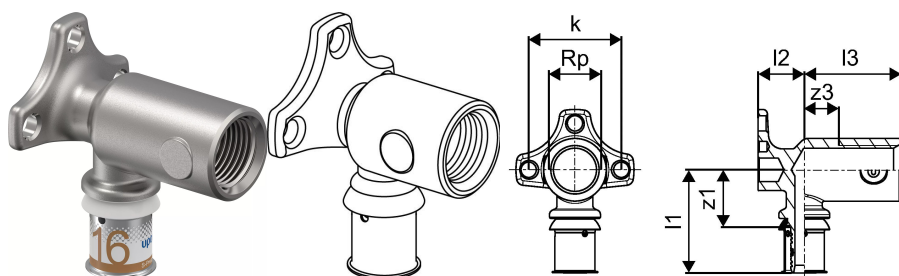

### Measurements

Female thread Rp	0,5
Length (l1)	44,5
Length (l2)	20
Length (l3)	42
Z Measurement k	40
z1	24,7
Z3	15

### Product code

Item no EAN	6414905219629
Item no GF	35001070646
Item no GTIN	06414905219629
Item no NOBB	55172857
Item no NRF	5114555
Item no VVS	045475216

### Dimensions

Item Unit Height	62
Item Unit Length	71
Item Unit Weight	0,202
Item Unit Width	51
Item_UOM	pce

### Packaging

Packaging GTIN PL1	06414905280148
Packaging GTIN PL3	06414905424887
Packaging GTIN PL4	06414905280162
Packaging Height PL1	89
Packaging Height PL3	188
Packaging Height PL4	708

Packaging Length PL1	176
Packaging Length PL3	277
Packaging Length PL4	1200
Packaging Quantity PL1	10
Packaging Quantity PL3	40
Packaging Quantity PL4	1920
Packaging Type PL1	Base_Box
Packaging Type PL3	Box
Packaging Type PL4	Pallet
Packaging Volume PL1	0,00211464
Packaging Volume PL3	0,009321604
Packaging Volume PL4	0,67968
Packaging Weight PL1	2,059
Packaging Weight PL3	8,496
Packaging Weight PL4	433,44
Packaging Width PL1	135
Packaging Width PL3	179
Packaging Width PL4	800

## Technical documents

Download documents here 

### Uponor UK

Blackmor Lane The Pavilion  
WD18 8GA, Watford  
UK

T +44 (0)1923 927000  
E [enquiries.uk@uponor.com](mailto:enquiries.uk@uponor.com)

[www.uponor.com/en-gb](http://www.uponor.com/en-gb)