
Product data sheet



GF Uponor S-Press PLUS tap elbow twin 90° FT 16-Rp1/2"-16

1070648

- For use in hyugienic serial or loop installations
- Made of tin-plated DZR brass
- For on wall installation or attachment with rotation protection to the Uponor Smart Aqua mounting angles and plates.
- Thread acc. to BS EN 10226-1

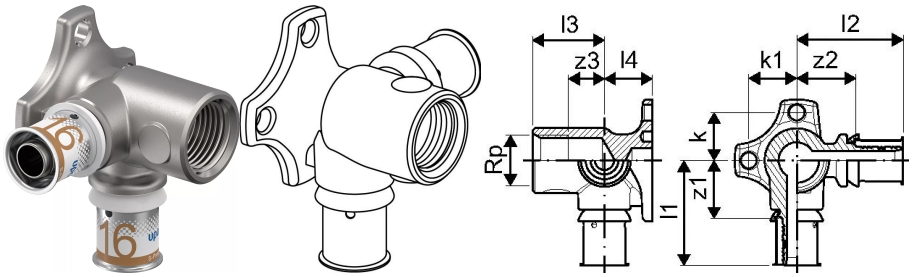

About GF Uponor S-Press PLUS tap elbow twin 90° FT

Specification

- Unique press indicator foil
- Fast 3-step installation (press without bevel)
- Innovative QR code for immediate digital access
- Colour coded
- Fixed press sleeve with inspection windows
- Precise jaw location
- Fast diameter recognition
- Accurate test safety function
- 100% backward compatible with existing Uponor components
- Flow rate optimized fitting body

Application

Tested/approved according to BS EN ISO 21003 Multilayer piping systems for hot and cold water installations inside buildings for application class 1,2,4,5/10bar

Domestic water services: The permanent operating temperature from 20°C to 70°C at a maximum permanent operating pressure of 10 bar. The short-term malfunction temperature is 95°C for a period of 100 hours in the operating life time.

Domestic cold water services : where the water temperature does not exceed 20°C at a maximum permanent operating pressure of 16bar.


Heating: The permanent operating temperature ranges up to 80°C at a maximum permanent operating pressure of 10 bar. The short-term malfunction temperature is 100°C for a period of 100 hours in the operating life time.

Certification

UK Reg4 approval
- WRAS or
- KIWA
to meet the requirements of the Water Supply (Water Fittings) Regulations 1999

GF Uponor S-Press PLUS tap elbow twin 90° FT 16-Rp1/2"-16

1070648

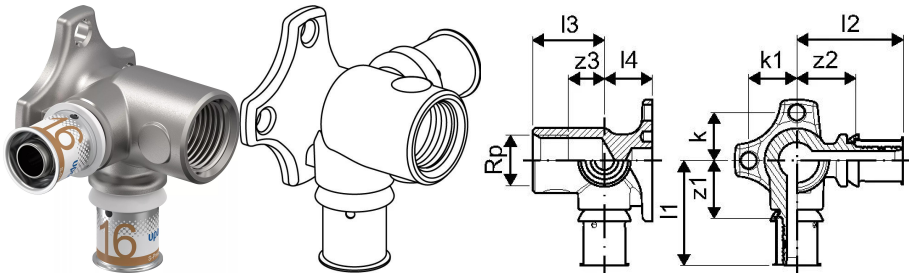

Measurements

Female thread Rp	1/2
Length (l1)	44
Length (l2)	44,5
Length (l3)	30
Length L4	20
Z Measurement k	20
Z Measurement k1	20
z1	24,2
Z2	24,7
Z3	15

Product code

Item no EAN	6414905219643
Item no GF	35001070648
Item no GTIN	06414905219643
Item no NOBB	55172876
Item no NRF	5114557

Dimensions

Item Unit Height	50
Item Unit Length	70.5
Item Unit Weight	0,235
Item Unit Width	69.5
Item_UOM	pce

Status

MTO (longer delivery times)	Item available on request, minimum lead time 2 weeks

Packaging

Packaging GTIN PL1	06414905279814
Packaging GTIN PL3	06414905425006
Packaging GTIN PL4	06414905279838
Packaging Height PL1	85
Packaging Height PL3	182
Packaging Height PL4	666
Packaging Length PL1	165
Packaging Length PL3	275
Packaging Length PL4	800
Packaging Quantity PL1	10
Packaging Quantity PL3	40
Packaging Quantity PL4	1920
Packaging Type PL1	Base_Box
Packaging Type PL3	Box
Packaging Type PL4	Pallet
Packaging Volume PL1	0,0018513
Packaging Volume PL3	0,00885885
Packaging Volume PL4	0,63936
Packaging Weight PL1	2,357
Packaging Weight PL3	9,558
Packaging Weight PL4	478,784
Packaging Width PL1	132
Packaging Width PL3	177
Packaging Width PL4	1200

Technical documents

Download documents here

Excellence in Flow

Visit our webpage to get in contact with your local specialist:
www.georgfischer.com/locations



Uponor UK

Blackmor Lane The Pavillion
WD18 8GA, Watford
UK

T +44 (0)1923 381212
E customerservice.uk.bfs@georgfischer.com

www.uponor.com/en-gb

+GF+