


## Uponor S-Press PLUS adapter wall penetr. 16-G1/2"FT

**1070652**

- For lead-through wall penetrations
- Dimensions of attachment plate (H x W x D) 100 x 50 x 2 mm.
- Hole diameter 33 mm.

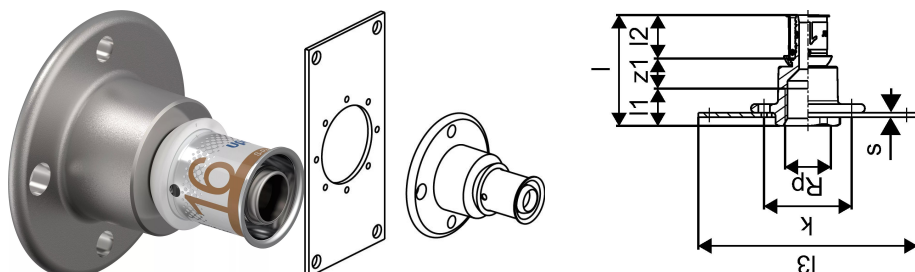

### About Uponor S-Press PLUS adapter wall penetr.

#### Specification

- Unique press indicator foil
- Fast 3-step installation (press without bevel)
- Innovative QR code for immediate digital access
- Colour coded
- Fixed press sleeve with inspection windows
- Precise jaw location
- Fast diameter recognition
- Accurate test safety function
- 100% backward compatible with existing Uponor components
- Flow rate optimized fitting body

#### Application

Tested/approved according to BS EN ISO 21003 Multilayer piping systems for hot and cold water installations inside buildings for application class 1,2,4,5/10bar

Domestic water services: The permanent operating temperature from 20°C to 70°C at a maximum permanent operating pressure of 10 bar. The short-term malfunction temperature is 95°C for a period of 100 hours in the operating life time.

Domestic cold water services : where the water temperature does not exceed 20°C at a maximum permanent operating pressure of 16bar.

Heating: The permanent operating temperature ranges up to 80°C at a maximum permanent operating pressure of 10 bar. The short-term malfunction temperature is 100°C for a period of 100 hours in the operating life time.

#### Certification


UK Reg4 approval

- WRAS or
- KIWA

to meet the requirements of the Water Supply (Water Fittings) Regulations 1999

## Uponor S-Press PLUS adapter wall penetr. 16-G1/2"FT

1070652

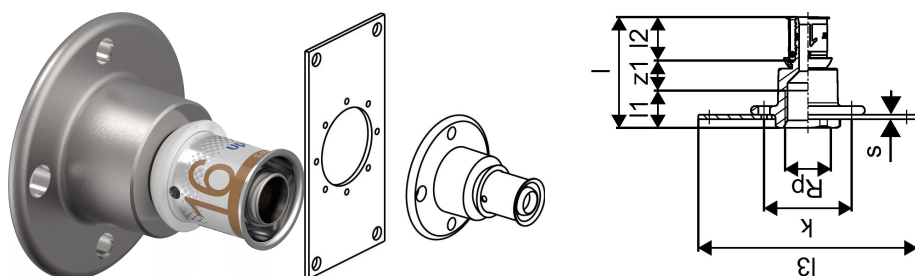

### Measurements

Female thread Rp	0,5
LENGTH_L	50,5
Length (l1)	17
Length (l2)	19,8
Length (l3)	100
Wall thickness_s	2
Z Measurement k	40
z1	13,7

### Product code

Item no EAN	6414905219681
Item no GF	35001070652
Item no GTIN	06414905219681
Item no NRF	5071608

### Dimensions

Item Unit Height	52.2
Item Unit Length	100
Item Unit Weight	0,14
Item Unit Width	50.5
Item_UOM	pce

### Status

MTO (longer delivery times)	Item available on request, minimum lead time 2 weeks
-----------------------------	--

### Packaging

Packaging GTIN PL1	06414905468959
Packaging GTIN PL2	06414905442850
Packaging GTIN PL4	06414905499878
Packaging Height PL1	57
Packaging Height PL2	89

Packaging Height PL4	678
Packaging Length PL1	105
Packaging Length PL2	176
Packaging Length PL4	1200
Packaging Quantity PL1	1
Packaging Quantity PL2	5
Packaging Quantity PL4	960
Packaging Type PL1	Plastic_Bag
Packaging Type PL2	Medium_Box
Packaging Type PL4	Pallet
Packaging Volume PL1	0,00033516
Packaging Volume PL2	0,00211464
Packaging Volume PL4	0,65088
Packaging Weight PL1	0,141
Packaging Weight PL2	0,739
Packaging Weight PL4	174,72
Packaging Width PL1	56
Packaging Width PL2	135
Packaging Width PL4	800

## Technical documents

Download documents here 

### Uponor UK

Blackmor Lane The Pavilion  
WD18 8GA, Watford  
UK

T +44 (0)1923 927000  
E [enquiries.uk@uponor.com](mailto:enquiries.uk@uponor.com)

[www.uponor.com/en-gb](http://www.uponor.com/en-gb)