


## Uponor S-Press PLUS tap elbow LWC 16-Rp1/2"FT I=35

### 1070654

- Incl. twist-proof attachment and sound protection
- For lead-through through walls.

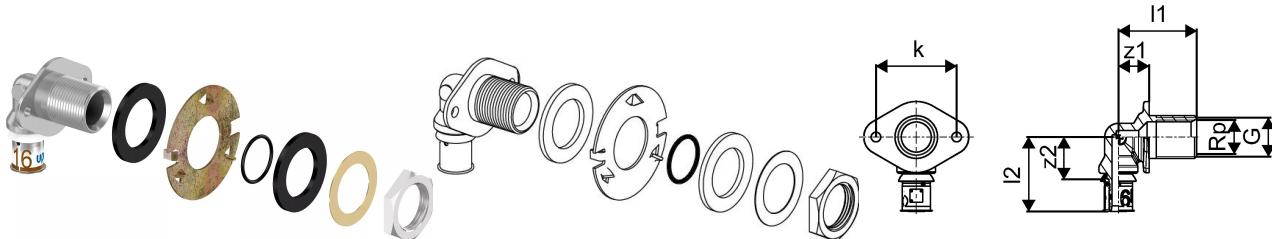

## About Uponor S-Press PLUS tap elbow LWC

### Specification

- Unique press indicator
- Fast 3-step installation (press without bevel)
- Innovative QR code for immediate digital access
- Colour code
- Fixed press sleeve with inspection window
- Precise jaw fixation
- Fast diameter recognition
- Accurate test safety function
- 100% backward compatible with existing Uponor components
- Flow rate optimized fitting body

### Application

- Heating systems (high temperature radiators) - where the water temperature does not continuously exceed 80°C, 10 bar (Conditions to application Class 5 - BS EN ISO 21003-1:2008). The maximum short-term malfunction temperature is 100°C for an accumulative 100 hours over the working life of the system. (Heating systems must be installed with room and water temperature controls in accordance with the current Building Regulations Parts L1 (Energy – Dwellings) and L2 (Energy – Non Dwellings) for England and Wales, or an equivalent national standard for Scotland or Republic of Ireland).

- Cold water domestic services: 0°C to 20°C where the water temperature does not exceed 20°C, 16bar.

- Hot water domestic services: 20°C to 70°C where the water temperature does not continuously exceed 70°C, 10 bar (Conditions to application Class 2 - BS EN ISO 21003-1:2008). The maximum short-term malfunction temperature is 95°C for an accumulative 100 hours over the working life of the system.

- Uponor multilayer pipe can be used for DHW recirculating systems, provided the operating temperatures and pressures do not exceed the maximum conditions detailed under 'Domestic Services'

- Chilled water: -10°C to 10°C, 10 bar. If risk of damage from freezing, a suitable anti-freeze additive must be used. Any additive must be suitable for use with Polyethylene, PPSU, EPDM and CW625N brass if not different mentioned:

- Male and female threads acc.to EN 10226-1.

### Certification


- WRAS : 1903901 - Uponor S-Press PLUS, S-Press PLUS, PPSU, MLC and SAC 16-32mm

- 2101339 : Manifolds and adapters

- KIWA – UK water Regulation 4

- Manufacturing is in accordance with the international quality standard ISO 9001 and environmental standard ISO 14001.

## Uponor S-Press PLUS tap elbow LWC 16-Rp1/2"FT I=35 1070654

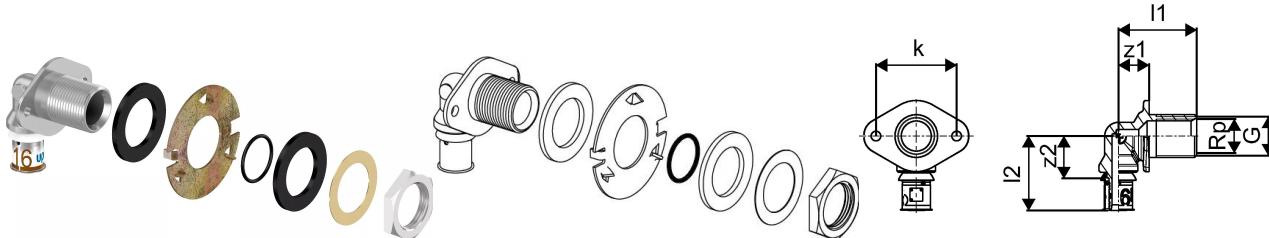

### Measurements

Cylindric_thread_G	0,75
Female thread Rp	0,5
Length (l1)	58,5
Length (l2)	46
Z Measurement g	3/4
Z Measurement k	50
z1	19
Z2	26,2

### Product code

Item no EAN	6414905219704
Item no GF	35001070654
Item no GTIN	06414905219704

### Dimensions

Item Unit Height	78
Item Unit Length	70
Item Unit Weight	0,276
Item Unit Width	65
Item_UOM	pce

### Status

MTO (longer delivery times)	Item available on request, minimum lead time 2 weeks
-----------------------------	--

### Packaging

Packaging GTIN PL1	06414905479207
Packaging GTIN PL2	06414905479214
Packaging GTIN PL4	06414905479221
Packaging Height PL1	83
Packaging Height PL2	89
Packaging Height PL4	678

Packaging Length PL1	75
Packaging Length PL2	176
Packaging Length PL4	1200
Packaging Quantity PL1	1
Packaging Quantity PL2	5
Packaging Quantity PL4	960
Packaging Type PL1	Plastic_Bag
Packaging Type PL2	Medium_Box
Packaging Type PL4	Pallet
Packaging Volume PL1	0,00043575
Packaging Volume PL2	0,00211464
Packaging Volume PL4	0,65088
Packaging Weight PL1	0,277
Packaging Weight PL2	1,465
Packaging Weight PL4	305
Packaging Width PL1	70
Packaging Width PL2	135
Packaging Width PL4	800

## Technical documents

Download documents here 

### Uponor UK

Blackmor Lane The Pavilion  
WD18 8GA, Watford  
UK

T +44 (0)1923 927000  
E [enquiries.uk@uponor.com](mailto:enquiries.uk@uponor.com)

[www.uponor.com/en-gb](http://www.uponor.com/en-gb)