Product data sheet





GF Uponor S-Press PLUS tap elbow mount.Unit 16-Rp1/2"FT c/c80

1070661

- Tap elbow assembly
- Rotation protected installed on mounting angle



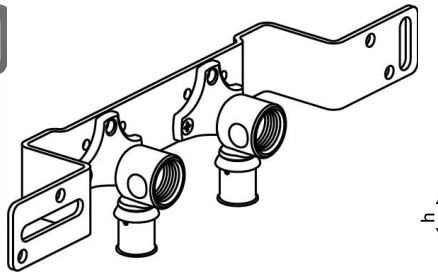

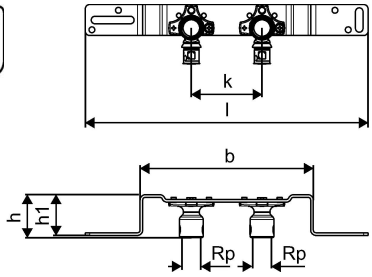

About GF Uponor S-Press PLUS tap elbow mount.Unit

Specification

- Unique press indicator foil
- Fast 3-step installation (press without bevel)
- Innovative QR code for immediate digital access
- Colour coded
- Fixed press sleeve with inspection windows
- Precise jaw location
- Fast diameter recognition
- Accurate test safety function
- 100% backward compatible with existing Uponor components
- Flow rate optimized fitting body

Application

Tested/approved according to BS EN ISO 21003 Multilayer piping systems for hot and cold water installations inside buildings for application class 1,2,4,5/10bar

Domestic water services: The permanent operating temperature from 20°C to 70°C at a maximum permanent operating pressure of 10 bar. The short-term malfunction temperature is 95°C for a period of 100 hours in the operating life time.

Domestic cold water services : where the water temperature does not exceed 20°C at a maximum permanent operating pressure of 16bar.

Heating: The permanent operating temperature ranges up to 80°C at a maximum permanent operating pressure of 10 bar. The short-term malfunction temperature is 100°C for a period of 100 hours in the operating life time.


Certification


UK Reg4 approval
- WRAS or
- KIWA
to meet the requirements of the Water Supply (Water Fittings) Regulations 1999

GF Uponor S-Press PLUS tap elbow mount.Unit 16-Rp1/2"FT c/c80

1070661



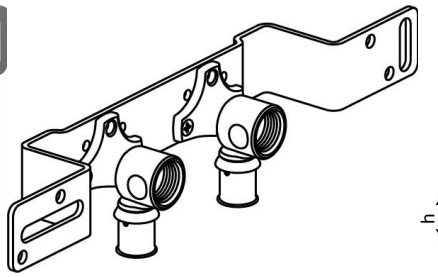

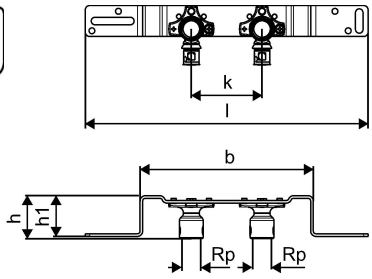

Measurements

Female thread Rp	0,5
LENGTH_L	320
Z Measurement b	196
Z Measurement h	47,5
Z Measurement h1	46
Z Measurement k	80

Product code

Item no EAN	6414905219773
Item no GF	35001070661
Item no GTIN	06414905219773

Dimensions

Item Unit Height	48.5
Item Unit Length	320
Item Unit Weight	0,598
Item Unit Width	67
Item_UOM	pce

Status

MTO (longer delivery times)	Item available on request, minimum lead time 2 weeks

Packaging

Packaging GTIN PL1	06414905628483
Packaging GTIN PL3	06414905628490
Packaging GTIN PL4	06414905293384
Packaging Height PL1	50
Packaging Height PL3	100
Packaging Height PL4	624

Packaging Length PL1	320
Packaging Length PL3	350
Packaging Length PL4	1200
Packaging Quantity PL1	1
Packaging Quantity PL3	5
Packaging Quantity PL4	300
Packaging Type PL1	Plastic_Bag
Packaging Type PL3	Box
Packaging Type PL4	Pallet
Packaging Volume PL1	0,00112
Packaging Volume PL3	0,007
Packaging Volume PL4	0,59904
Packaging Weight PL1	0,608
Packaging Weight PL3	3,14
Packaging Weight PL4	213,4
Packaging Width PL1	70
Packaging Width PL3	200
Packaging Width PL4	800

Technical documents

Download documents here

Excellence in Flow

Visit our webpage to get in contact with your local specialist:
www.georgfischer.com/locations



Uponor UK

Blackmor Lane The Pavillion
WD18 8GA, Watford
UK

T +44 (0)1923 381212
E customerservice.uk.bfs@georgfischer.com

www.uponor.com/en-gb

+GF+