


Uponor S-Press PLUS tap elbow mount.Unit 16-Rp1/2"FT c/c150mm 1070662

- Rotation protected installed on mounting angel

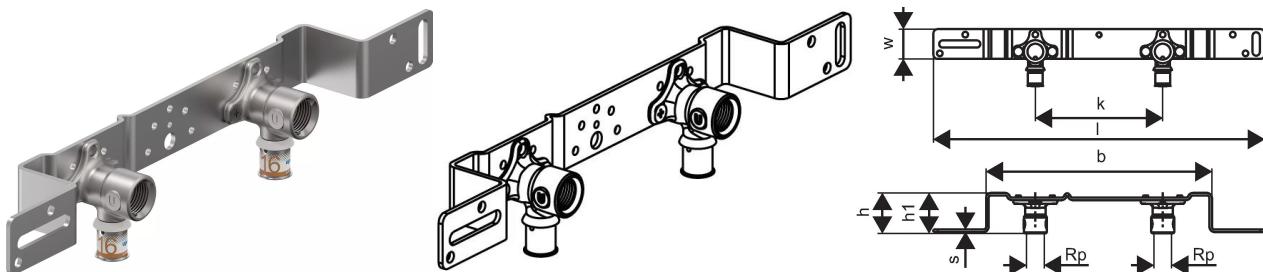

About Uponor S-Press PLUS tap elbow mount.Unit

Specification

- Unique press indicator
- Fast 3-step installation (press without bevel)
- Innovative QR code for immediate digital access
- Colour code
- Fixed press sleeve with inspection window
- Precise jaw fixation
- Fast diameter recognition
- Accurate test safety function
- 100% backward compatible with existing Uponor components
- Flow rate optimized fitting body

Application

- Heating systems (high temperature radiators) - where the water temperature does not continuously exceed 80°C, 10 bar (Conditions to application Class 5 - BS EN ISO 21003-1:2008). The maximum short-term malfunction temperature is 100°C for an accumulative 100 hours over the working life of the system. (Heating systems must be installed with room and water temperature controls in accordance with the current Building Regulations Parts L1 (Energy – Dwellings) and L2 (Energy – Non Dwellings) for England and Wales, or an equivalent national standard for Scotland or Republic of Ireland).

- Cold water domestic services: 0°C to 20°C where the water temperature does not exceed 20°C, 16bar.

- Hot water domestic services: 20°C to 70°C where the water temperature does not continuously exceed 70°C, 10 bar (Conditions to application Class 2 - BS EN ISO 21003-1:2008). The maximum short-term malfunction temperature is 95°C for an accumulative 100 hours over the working life of the system.

- Uponor multilayer pipe can be used for DHW recirculating systems, provided the operating temperatures and pressures do not exceed the maximum conditions detailed under 'Domestic Services'

- Chilled water: -10°C to 10°C, 10 bar. If risk of damage from freezing, a suitable anti-freeze additive must be used. Any additive must be suitable for use with Polyethylene, PPSU, EPDM and CW625N brass if not different mentioned:

- Male and female threads acc.to EN 10226-1.

Certification


- WRAS : 1903901 - Uponor S-Press PLUS, S-Press PLUS, PPSU, MLC and SAC 16-32mm

- 2101339 : Manifolds and adapters

- KIWA – UK water Regulation 4

- Manufacturing is in accordance with the international quality standard ISO 9001 and environmental standard ISO 14001.

Uponor S-Press PLUS tap elbow mount.Unit 16-Rp1/2"FT c/c150mm 1070662

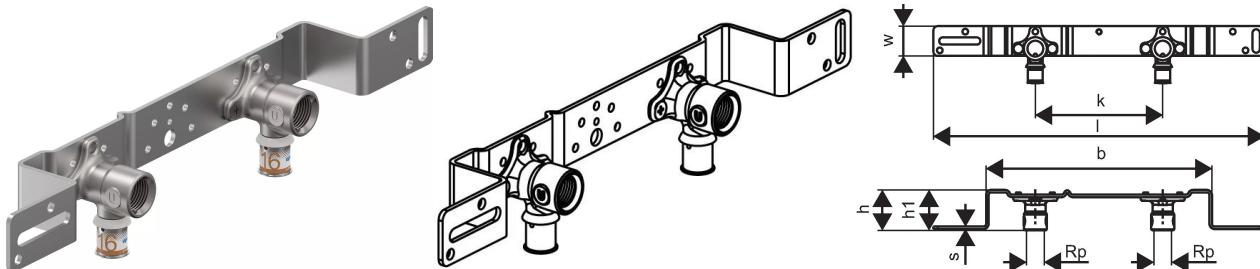

Measurements

Female thread Rp	0,5
LENGTH_L	440
Z Measurement b	266
Z Measurement h	47,5
Z Measurement h1	57
Z Measurement k	150

Product code

Item no EAN	6414905219780
Item no GF	35001070662
Item no GTIN	06414905219780
Item no VVS	045401316

Dimensions

Item Unit Height	48,5
Item Unit Length	440
Item Unit Weight	0,643
Item Unit Width	67
Item_UOM	pce

Status

MTO (longer delivery times)	Item available on request, minimum lead time 2 weeks
-----------------------------	------------------------------------------------------

Packaging

Packaging GTIN PL1	06414905663200
Packaging GTIN PL4	06414905663613
Packaging Height PL1	82
Packaging Height PL4	1090
Packaging Length PL1	477
Packaging Length PL4	1200
Packaging Quantity PL1	5

Packaging Quantity PL4	380
Packaging Type PL1	Base_Box
Packaging Type PL4	Pallet
Packaging Volume PL1	0,01056078
Packaging Volume PL4	1,0464
Packaging Weight PL1	3,3
Packaging Weight PL4	255
Packaging Width PL1	270
Packaging Width PL4	800

Technical documents

Download documents here 

Uponor UK

Blackmor Lane The Pavilion
WD18 8GA, Watford
UK

T +44 (0)1923 927000
E enquiries.uk@uponor.com

www.uponor.com/en-gb