Product data sheet





GF Uponor S-Press PLUS tap elbow mount.Unit 16-Rp1/2"FT c/c150

1070662

- Tap elbow assembly
- Rotation protected installed on mounting angle



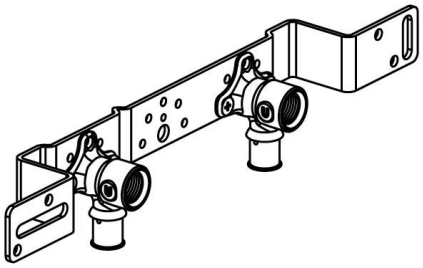

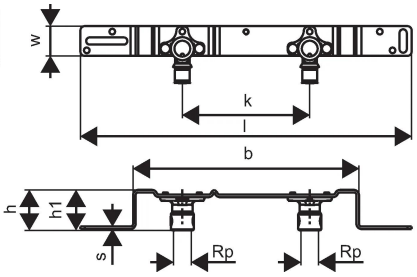

About GF Uponor S-Press PLUS tap elbow mount.Unit

Specification

- Unique press indicator foil
- Fast 3-step installation (press without bevel)
- Innovative QR code for immediate digital access
- Colour coded
- Fixed press sleeve with inspection windows
- Precise jaw location
- Fast diameter recognition
- Accurate test safety function
- 100% backward compatible with existing Uponor components
- Flow rate optimized fitting body

Application

Tested/approved according to BS EN ISO 21003 Multilayer piping systems for hot and cold water installations inside buildings for application class 1,2,4,5/10bar

Domestic water services: The permanent operating temperature from 20°C to 70°C at a maximum permanent operating pressure of 10 bar. The short-term malfunction temperature is 95°C for a period of 100 hours in the operating life time.

Domestic cold water services : where the water temperature does not exceed 20°C at a maximum permanent operating pressure of 16bar.

Heating: The permanent operating temperature ranges up to 80°C at a maximum permanent operating pressure of 10 bar. The short-term malfunction temperature is 100°C for a period of 100 hours in the operating life time.


Certification


UK Reg4 approval
- WRAS or
- KIWA
to meet the requirements of the Water Supply (Water Fittings) Regulations 1999

GF Uponor S-Press PLUS tap elbow mount.Unit 16-Rp1/2"FT c/c150

1070662



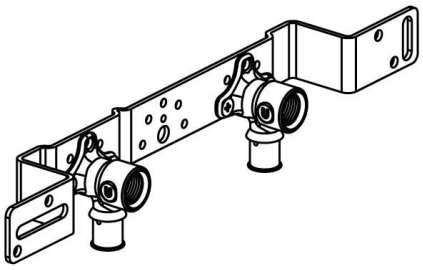

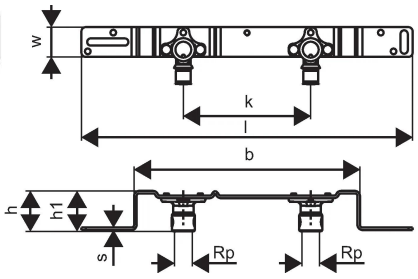

Measurements

Female thread Rp	0,5
LENGTH_L	440
Z Measurement b	266
Z Measurement h	47,5
Z Measurement h1	57
Z Measurement k	150

Product code

Item no EAN	6414905219780
Item no GF	35001070662
Item no GTIN	06414905219780
Item no VVS	045401316

Dimensions

Item Unit Height	48.5
Item Unit Length	440
Item Unit Weight	0,643
Item Unit Width	67
Item_UOM	pce

Status

MTO (longer delivery times)	Item available on request, minimum lead time 2 weeks

Packaging

Packaging GTIN PL1	06414905663200
Packaging GTIN PL4	06414905663613
Packaging Height PL1	82
Packaging Height PL4	1090
Packaging Length PL1	477

Packaging Length PL4	1200
Packaging Quantity PL1	5
Packaging Quantity PL4	380
Packaging Type PL1	Base_Box
Packaging Type PL4	Pallet
Packaging Volume PL1	0,01056078
Packaging Volume PL4	1,0464
Packaging Weight PL1	3,3
Packaging Weight PL4	255
Packaging Width PL1	270
Packaging Width PL4	800

Technical documents

Download documents here

Excellence in Flow

Visit our webpage to get in contact with your local specialist:
www.georgfischer.com/locations



Uponor UK

Blackmor Lane The Pavillion
WD18 8GA, Watford
UK

T +44 (0)1923 381212
E customerservice.uk.bfs@georgfischer.com

www.uponor.com/en-gb

+GF+